

Bitzer 4HE-25Y-40P (x1) & 4H-25.2Y-40P (x2)

Specifications

Brand	Bitzer
Type	4HE-25Y-40P (x1) & 4H-25.2Y-40P (x2)
Refrigerant	Freon
kW at 0°C/+40°C	180,3
kW at -5°C/+40°C	149,8
kW at -10°C/+40°C	123,1
kW at -20°C/+40°C	80,1
kW at -30°C/+40°C	48,3
kW at -40°C/+40°C	25,5
On steel base frame	✓
Pressure safety switches	✓
Hp/Lp/Op	
Pressure gauges	✓
Hp/Lp/Op	
Liquid receiver	✓
Suction accumulator	✓
Oil separator	✓
Oil level system AC&R	✓
Liquid line filter drier	✓
Sight Glass	✓
Solenoid Valve	✓
m3 / h	50 Hz - 220,9 m³/h / 60 Hz - 266,4 m³/h



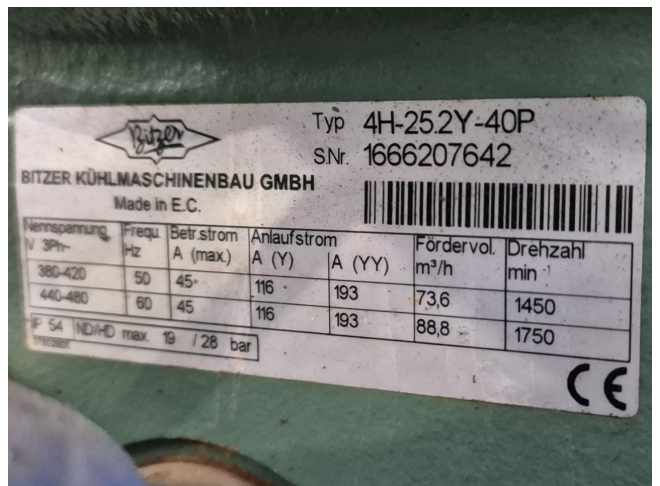
	2004
	4HE-25.2Y-40P - Y.o.b.
	2016
Package / Rack	4H-25.2Y-40P - Y.o.b.
Sizes	2930x1160x1980 mm (LxWxH)
Stock	1



Description

Used Bitzer 4HE-25Y-40P (x1) & 4H-25.2Y-40P (x2)

Used Bitzer 4HE-25Y-40P (x1) & 4H-25.2Y-40P (x1) semi-hermetic reciprocating compressor rack on Freon. Complete with a liquid receiver, suction accumulator, oil separator, oil reservoir, liquid line filter drier, pressure and safety switches/gauges. The compressor has a displacement of 220,9 m³/h - 50 Hz & 266,4 m³/h at 60 Hz.

*Why choose for HOSBV? We are not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning. *If requested we are happy to arrange your logistics.



						
Typ 4H-25.2Y-40P						
SNr. 1666207642						
BITZER KÜHLMASCHINENBAU GMBH						
Made in E.C.						
						
Nennspannung V 3Ph~	Frequ. Hz	Betr.strom A (max.)	Anlaufstrom A (Y)	A (YY)	Fördervol. m³/h	Drehzahl min⁻¹
380-420	50	45	116	193	73,6	1450
440-480	60	45	116	193	88,8	1750
IP 54 NOHD max. 19 / 28 bar						
						

