

Bitzer OSKA5361-K

Specifications

Brand	Bitzer
Type	OSKA5361-K
Refrigerant	NH 3 (ammonia)
kW at +10°C/+40°C	153.2
kW at 0°C/+40°C	106.0
kW at -5°C/+40°C	86.8
kW at -10°C/+40°C	70.2
Remarks	as good as new
Stock	1



Description

Used Bitzer OSKA5361-K

Used, well maintained Bitzer OSKA5361-K screw Ammonia NH3 refrigeration . Our capacity table is based on the used type of Freon. You can also use these compressors on alternative types of Freon. For all the other specs (if available), see the picture of the manufacturer model plate or the attached pdf file. *Why choose for HOSBV? Were not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning. *Optional we can also perform a new paint job and arrange the logistics.



bezogen auf 5 K Sauggasüberhitzung,
ohne Flüssigkeitsunterkühlung,
Motor-Drehzahl 2300 min⁻¹ (50 Hz)

based on 5 K suction superheat,
without liquid subcooling, motor speed
2300 min⁻¹ (50 Hz)

se référant à surchauffe à l'aspiration de 5 K,
sans sous-refroidissement de liquide,
vitesse du moteur 2300 min⁻¹ (50 Hz)



Klima-/Normalbereich		High-/Medium temperature range										Climatisation/Moyennes températures									
Verdichter Typ	Verf. Temp.	Kälteleistung Cooling capacity Puissance frigorifique										Leistungsaufnahme (Welle) Power consumption (shaft) Puissance absorbée (arbre)									
Compressor type	Cond. temp.	Verdampfungstemperatur °C										Temperatures d'évaporation °C									
Type de compresseur	Temp. de cond. °C	Saturated suction temperature °C										Température d'évaporation °C									
		12,5	10	7,5	5	0	-5	-10	-15	-20		12,5	10	7,5	5	0	-5	-10	-15	-20	
OSKA341-K	30	13000	11800	10600	9700	8700	8000	7400	6800	6400	6000	19,18	18,54	17,68	17,31	16,14	15,03	13,98	12,98	12,05	
	40	11800	10800	10200	9400	8500	7800	7200	6600	6200	5800	20,00	22,20	21,40	20,70	19,34	18,06	16,84	15,98		
	50	10600	10000	9400	8600	7700	7000	6400	5800	5400	5000	20,80	23,00	22,20	21,50	20,14	18,86	17,64	16,78		
OSKA351-K	30	15000	13800	12600	11700	10700	9900	9300	8700	8300	8000	22,80	22,10	21,30	20,60	19,21	17,90	16,65	15,47	14,35	
	40	14000	12800	11600	10700	9700	9000	8400	7800	7400	7000	23,70	24,40	23,60	22,90	21,50	20,20	18,95	17,75		
	50	13000	11800	10600	9700	8700	8000	7400	6800	6400	6000	24,50	25,20	24,40	23,70	22,30	21,00	19,75	18,55		
OSKA361-K	30	17000	15800	14600	13700	12700	12000	11400	10800	10400	10000	26,80	26,10	25,30	24,60	23,20	21,90	20,65	19,45	18,25	
	40	16000	14800	13600	12700	11700	11000	10400	9800	9400	9000	27,70	28,40	27,60	26,90	25,50	24,20	22,95	21,75		
	50	15000	13800	12600	11700	10700	10000	9400	8800	8400	8000	28,50	29,20	28,40	27,70	26,30	25,00	23,75	22,55		

Tiefkühlbereich
Economiser-Betrieb

Low temperature range
Economiser operation

Congélation
Fonctionnement avec économiseur



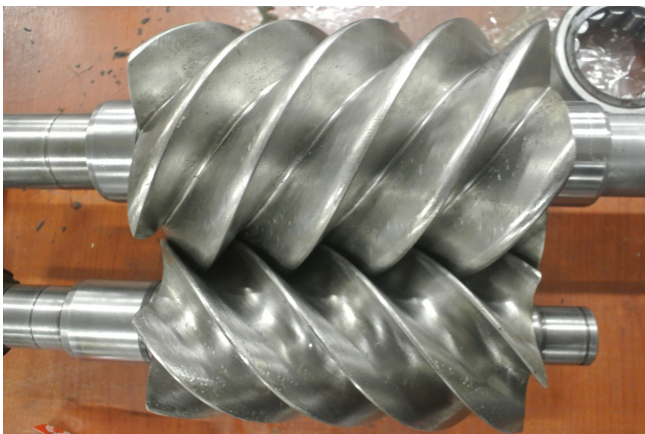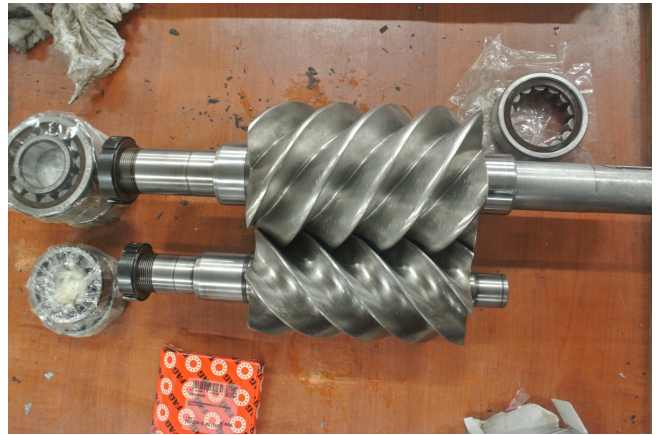



Your partner for used commercial and
industrial refrigeration equipment
