




Selection: Semi-hermetic Screw Compressors HS

Input Values

Compressor model	HSK8561-125
Refrigerant	R404A
Reference temperature	Dew point temp.
Evaporating SST	0 °C
Condensing SDT	40,0 °C
Liq. subc. (in condenser)	0 K
Auto. subcooling	Auto
Suct. gas superheat	10,00 K
Operating mode	Economiser
Power supply	400V-3-50Hz
Useful superheat	100%
Additional cooling	Automatic
Max. discharge gas temp.	80,0 °C

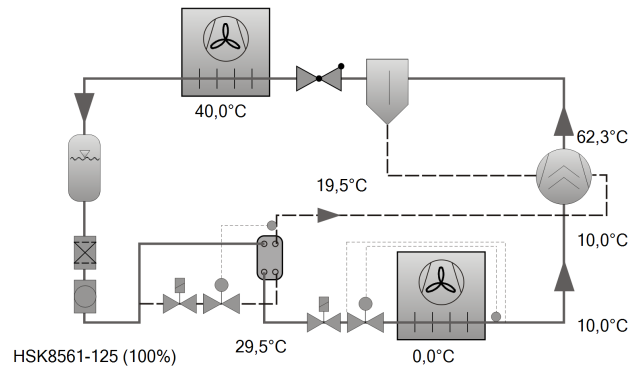


Result

Compressor	HSK8561-125-40P
Capacity steps	100%
Cooling capacity	346 kW
Cooling capacity *	354 kW
Evaporator capacity	346 kW
Power input	98,7 kW
Current (400V)	164,1 A
Voltage range	380-415V
Condenser capacity	444 kW
COP/EER	3,51
COP/EER *	3,55
Mass flow LP	9431 kg/h
Mass flow HP	10651 kg/h
Operating mode	Economiser
Liquid temp. (sc)	29,5 °C
Mass flow ECO	1220 kg/h
sub cooler load	42,7 kW
sat. ECO Temp.	19,49 °C
ECO pressure	10,73 bar(a)
Oil volume flow	2,13 m³/h
Cooling method	--
Discharge gas temp. w/o cooling	62,3 °C

Tentative Data.

*According to EN12900 (10K suction gas superheat, liquid subcooling in Economiser with 5K temperature difference)

Application Limits ECO HSK8561-125

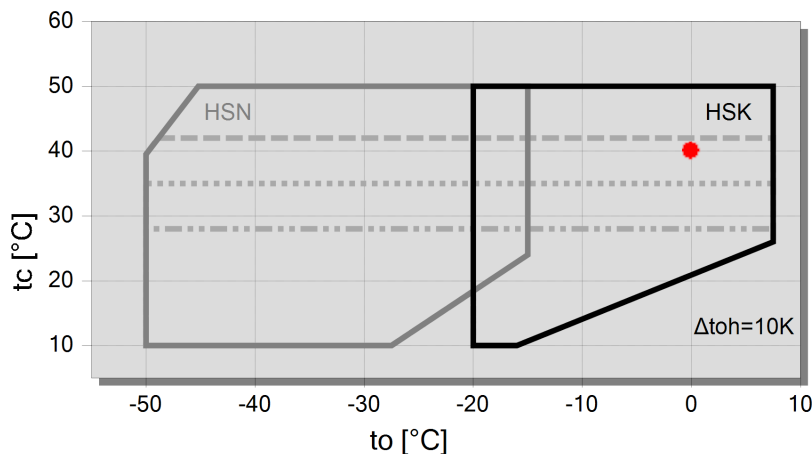


Legend

- max. tc for frequencies = 20Hz
- max. tc for frequencies = 25Hz
- . - . max. tc for frequencies = 35Hz
- A



Technical Data: HSK8561-125

Dimensions and Connections

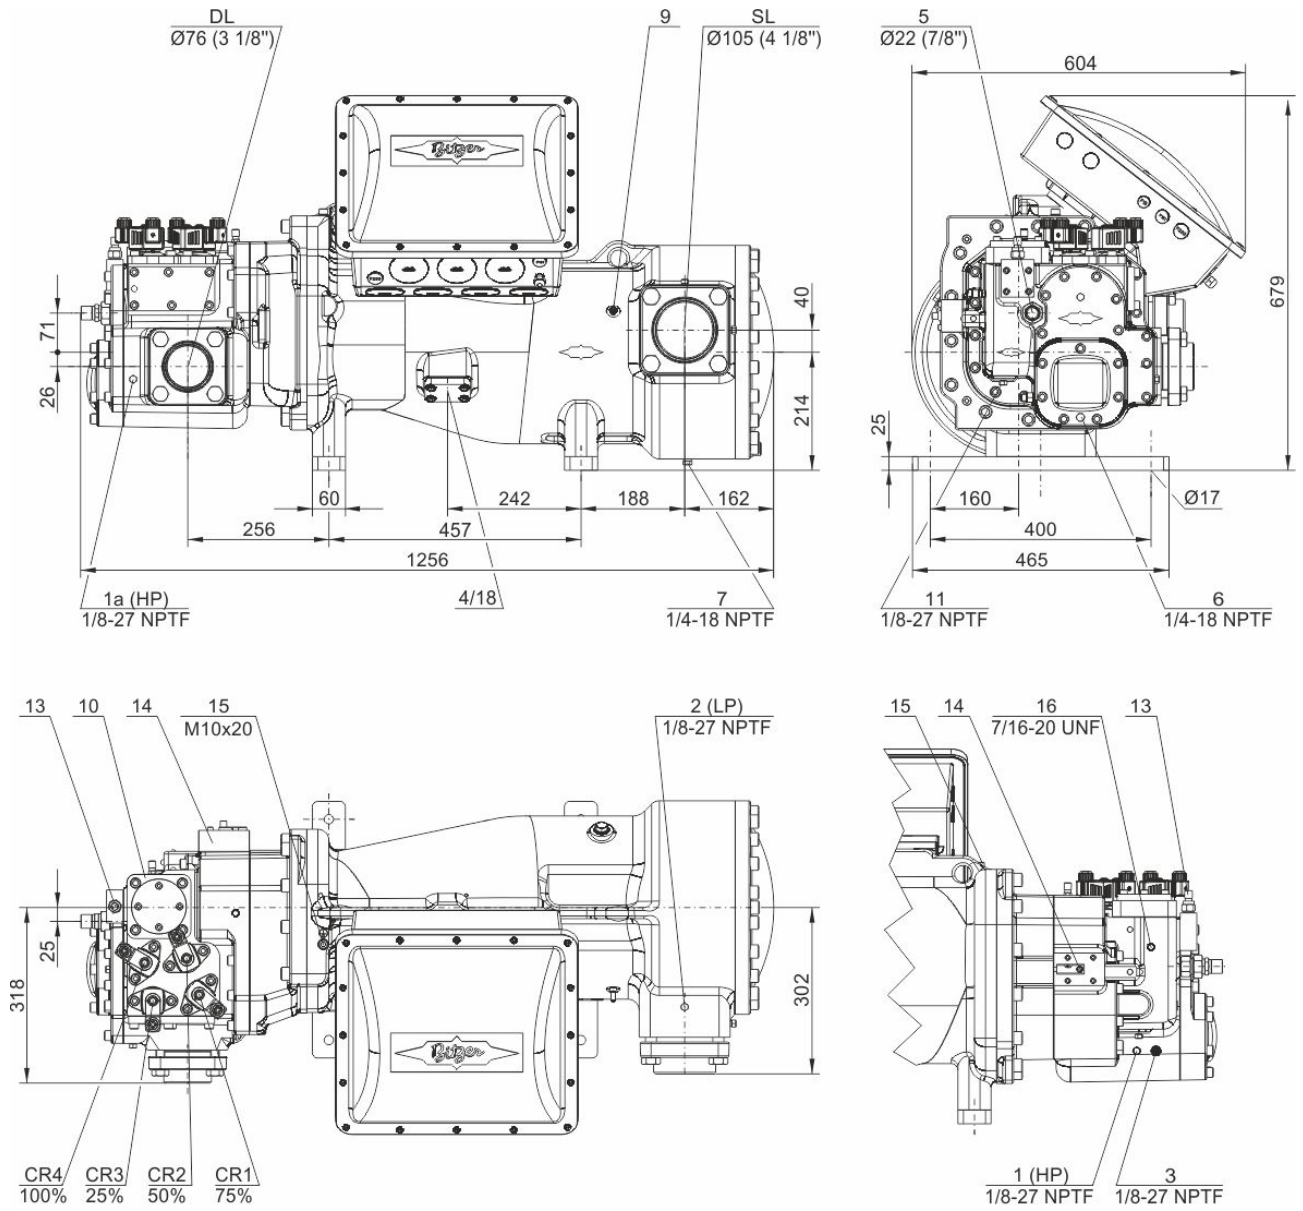



Technical Data

Technical Data

Displacement (2900 RPM 50 Hz)	359 m ³ /h
Displacement (3500 RPM 60 Hz)	433 m ³ /h
Weight	580 kg
Max. pressure (LP/HP)	19 / 28 bar
Connection suction line	DN 100
Connection discharge line	76 mm - 3 1/8"
Adapter/shut-off valve for ECO	28 mm - 1 1/8" (Option)
Adapter for liquid injection	22 mm - 7/8" (Option)
Oil type R22	B150SH, B100 (Option)
Oil type R134a/R404A/R507A/R407A/R407F	BSE170
Oil type R448A/R449A/R454C	BSE170

Motor data

Motor version	1
Motor voltage (more on request)	380-415V PW-3-50Hz
Max operating current	216.0 A
Starting current (Rotor locked)	612.0 A D / 943.0 A DD
Max. Power input	132,0 kW

Extent of delivery (Standard)

Discharge gas temperature sensor	Standard
Start unloading	Standard
Oil flow control	SE-B3 (Standard)
Motor protection	SE-E1 + SE-B3 (Standard), SE-E3 (Standard for 660-690V)
Capacity control	100-75-50% or 100-50% (Standard)
Enclosure class	IP54

Available Options

Suction shut-off valve	Option
Discharge shut-off valve	Option
ECO connection with shut-off valve	Option
Motor protection	SE-i1 (200-690V)

Sound measurement



Semi-hermetic Screw Compressors HS

HSK = Application for air-conditioning and medium temperature cooling.

HSN = Application for low temperature cooling.

Notes regarding application limits (see "Limits")

- * Ranges are valid for standard operation and at full-load conditions.
- * With high pressure conditions, part-load operation is partly limited (see application limits in applications manual SH-100).
- * With Economizer operation the maximum admissible evaporation temperature is shifted by 10 K downward (otherwise there is a danger of excessive compression and overload of the motor because of a higher mass flow). At pull-down conditions from higher evaporation temperatures, the ECO injection must remain closed until the evaporation temperature is below the maximum admissible value and a stable operation is achieved (e.g. control of the ECO solenoid valve by means of a low pressure cut-out). The use of the ECO-system with higher evaporation temperatures requires individual consultation with Bitzer.

HS 64/74

- * Capacity control with ECO operation at the same time is limited to one single regulating step (CR 75 %). At CR 50 % the ECO injection should be closed.

Data for sound emission

Data are based on 50 Hz application (IP-units 60 Hz) and R404A.

Sound pressure level: values are based on open air test sites with semi-spherical sound emissions at 1 meter distance. For further information see Technical Information "Sound Data".