



Selection: Semi-hermetic Screw Compressors HS

Input Values

Compressor model	HSN6461-50	Operating mode	Economizer
Refrigerant	R404A	Power supply	400V-3-50Hz
Reference temperature	Dew point temp.	Useful superheat	100%
Liq. subc. (in condenser)	0 K	Additional cooling	Automatic
Auto. subcooling	Auto	Max. discharge gas temp.	80,0 °C
Suct. gas superheat	10,00 K		

Result


Q [W]	Cooling capacity	mHP [kg/h]	Mass flow HP
P [kW]	Power input	Qac [kW]	Additional cooling
I [A]	Current	tcu [°C]	Liquid temp.
COP [-]	COP/EER	pm [bar(a)]	ECO pressure
mLP [kg/h]	Mass flow LP	Qsc [kW]	sub cooler capacity (ECO)

tc	to	-15°C	-20°C	-25°C	-30°C	-35°C	-40°C	-45°C	-50°C
30°C	Q [W]	105321	88782	74154	61272	49978	40126	31583	24223
	P [kW]	37,9	36,4	34,9	33,4	31,9	30,3	28,6	26,9
	I [A]	60,9	58,7	56,6	54,4	52,2	49,9	47,5	45,1
	COP [-]	2,78	2,44	2,12	1,83	1,57	1,33	1,10	0,90
	mLP [kg/h]	2593	2149	1764	1431	1145	901	695	522
	mHP [kg/h]	3037	2613	2228	1881	1568	1288	1039	817
	Qac [kW]	--	--	--	--	--	1,81	4,90	7,60
	tcu [°C]	14,32	10,51	6,51	2,31	-2,09	-6,71	-11,53	-16,56
	pm [bar(a)]	6,91	6,14	5,40	4,70	4,04	3,42	2,86	2,35
Qsc [kW]	16,55	17,01	16,75	15,93	14,69	13,14	11,39	9,52	
40°C	Q [W]	98093	82757	69189	57223	46711	37518	29526	--
	P [kW]	46,1	44,4	42,6	40,8	39,0	37,2	35,4	
	I [A]	73,3	70,6	67,9	65,2	62,5	59,9	57,3	
	COP [-]	2,13	1,87	1,62	1,40	1,20	1,01	0,83	
	mLP [kg/h]	2541	2102	1722	1394	1112	873	670	
	mHP [kg/h]	3212	2769	2367	2004	1676	1380	1116	
	Qac [kW]	--	--	--	3,05	6,30	9,30	12,06	
	tcu [°C]	19,22	15,33	11,19	6,81	2,19	-2,69	-7,81	
	pm [bar(a)]	8,01	7,13	6,28	5,46	4,68	3,95	3,29	
Qsc [kW]	22,5	22,0	20,9	19,31	17,42	15,30	13,05		
50°C	Q [W]	--	--	--	51345	41732	33253	25808	--
	P [kW]				50,6	48,5	46,6	44,9	
	I [A]				80,6	77,1	74,1	71,4	
	COP [-]				1,02	0,86	0,71	0,57	
	mLP [kg/h]				1317	1040	805	606	
	mHP [kg/h]				2109	1761	1445	1158	
	Qac [kW]				16,04	18,57	21,1	23,5	
	tcu [°C]				12,02	7,03	1,70	-3,98	
	pm [bar(a)]				6,44	5,49	4,60	3,78	
Qsc [kW]				21,9	19,36	16,65	13,85		

-- No calculation possible (see message in single point selection)

*According to EN12900 (10K suction gas superheat, liquid subcooling in Economiser with 5K temperature difference)

Application Limits ECO HSN6461-50

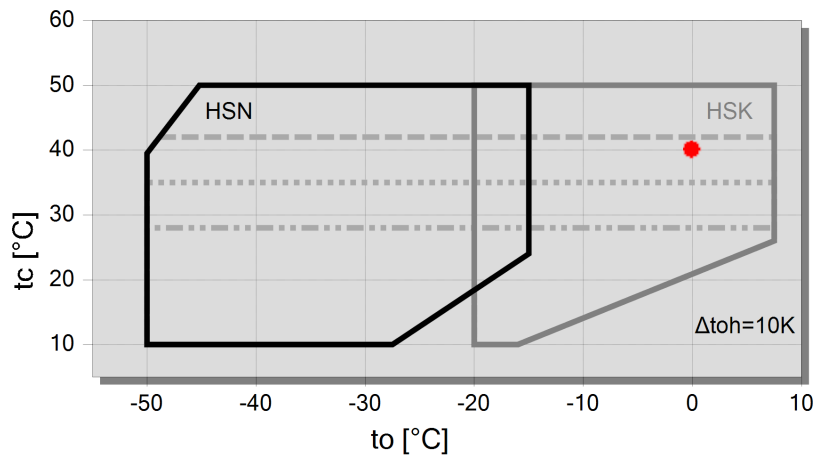


Legend

- max. t_c for frequencies = 20Hz
- ... max. t_c for frequencies = 25Hz
- - - max. t_c for frequencies = 35Hz
- A



Technical Data: HSN6461-50

Dimensions and Connections

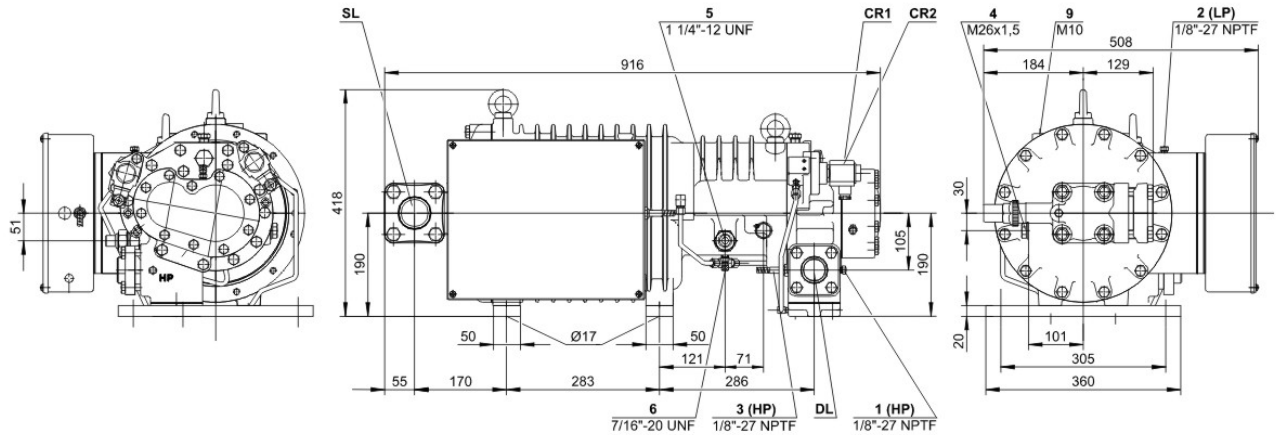

Technical Data

Technical Data

Displacement (2900 RPM 50 Hz)	165 m ³ /h
Displacement (3500 RPM 60 Hz)	198 m ³ /h
Weight	238 kg
Max. pressure (LP/HP)	19 / 28 bar
Connection suction line	54 mm - 2 1/8"
Connection discharge line	42 mm - 1 5/8"
Adapter/shut-off valve for ECO	22 mm - 7/8" (Option)
Oil type R22	B150SH, B100 (Option)
Oil type R134a/R404A/R507A/R407A/R407F	BSE170 (Option)
Oil type R448A/R449A	BSE170 (Option)

Motor data

Motor voltage (more on request)	380-415V PW-3-50Hz
Max operating current	79.0 A
Starting current (Rotor locked)	206.0 A D / 355.0 A DD
Max. Power input	52,1 kW

Extent of delivery (Standard)

Discharge gas temperature sensor	Standard
Start unloading	Standard
Oil flow control	SE-B2 (Standard)
Motor protection	SE-E1 (Standard), SE-E3 (Standard for 660-690V)
Suction shut-off valve	Standard
Capacity control	100-75-50% (Standard)
Enclosure class	IP54

Available Options

Discharge shut-off valve	Option
ECO connection with shut-off valve	Option
Motor protection	SE-i1 (200-690V)

Sound measurement

Sound power level (-35°C / 40°C)	87,5 dB(A)
Sound pressure level @ 1m (-35°C / 40°C)	79,5 dB(A)



Semi-hermetic Screw Compressors HS

HSK = Application for air-conditioning and medium temperature cooling.

HSN = Application for low temperature cooling.

Notes regarding application limits (see "Limits")

- * Ranges are valid for standard operation and at full-load conditions.
- * With high pressure conditions, part-load operation is partly limited (see application limits in applications manual SH-100).
- * With Economizer operation the maximum admissible evaporation temperature is shifted by 10K downward (otherwise there is a danger of excessive compression and overload of the motor because of a higher mass flow). At pull-down conditions from higher evaporation temperatures, the ECO injection must remain closed until the evaporation temperature is below the maximum admissible value and a stable operation is achieved (e.g. control of the ECO solenoid valve by means of a low pressure cut-out). The use of the ECO-system with higher evaporation temperatures requires individual consultation with Bitzer.

HS 64/74

- * Capacity control with ECO operation at the same time is limited to one single regulating step (CR 75%). At CR 50% the ECO injection should be closed.

Data for sound emission

Data are based on 50Hz application (IP-units 60Hz) and R404A.

Sound pressure level: values are based on open air test sites with semi-spherical sound emissions at 1 meter distance. For further information see Technical Information "Sound Data".

Legend of connection positions according to "Dimensions":

- 1 High pressure connection (HP)
- 1a Additional high pressure connection
- 1b Connection for high pressure transmitter (HP)
- 2 Low pressure connection (LP)
- 2a Additional low pressure transmitter (LP)
- 2b Connection for low pressure transmitter (LP)
- 3 Discharge gas temperature sensor connection (HP)
- 4 Connection for economizer (ECO)
- HS.85: ECO valve with connection pipe (option)
- HS.95, OS.85, OS.95: ECO valve (option)
- 5 Oil injection connection
- 6 Oil pressure connection for HS.85 and OS.85:
 - Oil drain (compressor housing)
 - 7 Oil drain (motor housing)
 - 7a Oil drain (suction gas filter)
 - 7b Oil drain out of shaft seal (maintenance connection)
 - 7c Oil drain tube (shaft seal)
- 8 Threaded bore for foot fastening
- 9 Threaded bore for pipe support (ECO and LI line)
- 10 Maintenance connection (oil filter)
- 11 Oil drain (oil filter)
- 12 Monitoring of oil stop valve
- 13 Oil filter monitoring
- 14 Oil flow switch
- 15 Earth screw for housing
- 16 Pressure relief (oil filter chamber)
- 17 Maintenance connection for shaft seal
- 18 Liquid injection (LI)
- 19 Compressor module
- 20 Slider position indicator
- 21 Oil level switch
- 22 Connection for oil pressure transmitter
- 23 Connection for oil and gas return (for systems with flooded evaporator adapter optional)
- 24 Access to oil circulation restrictor
- SL Suction gas line



DL Discharge gas line

Dimensions can show tolerances according to EN ISO 13920-B.