



97671709 AC 25 BBQE 50 Hz

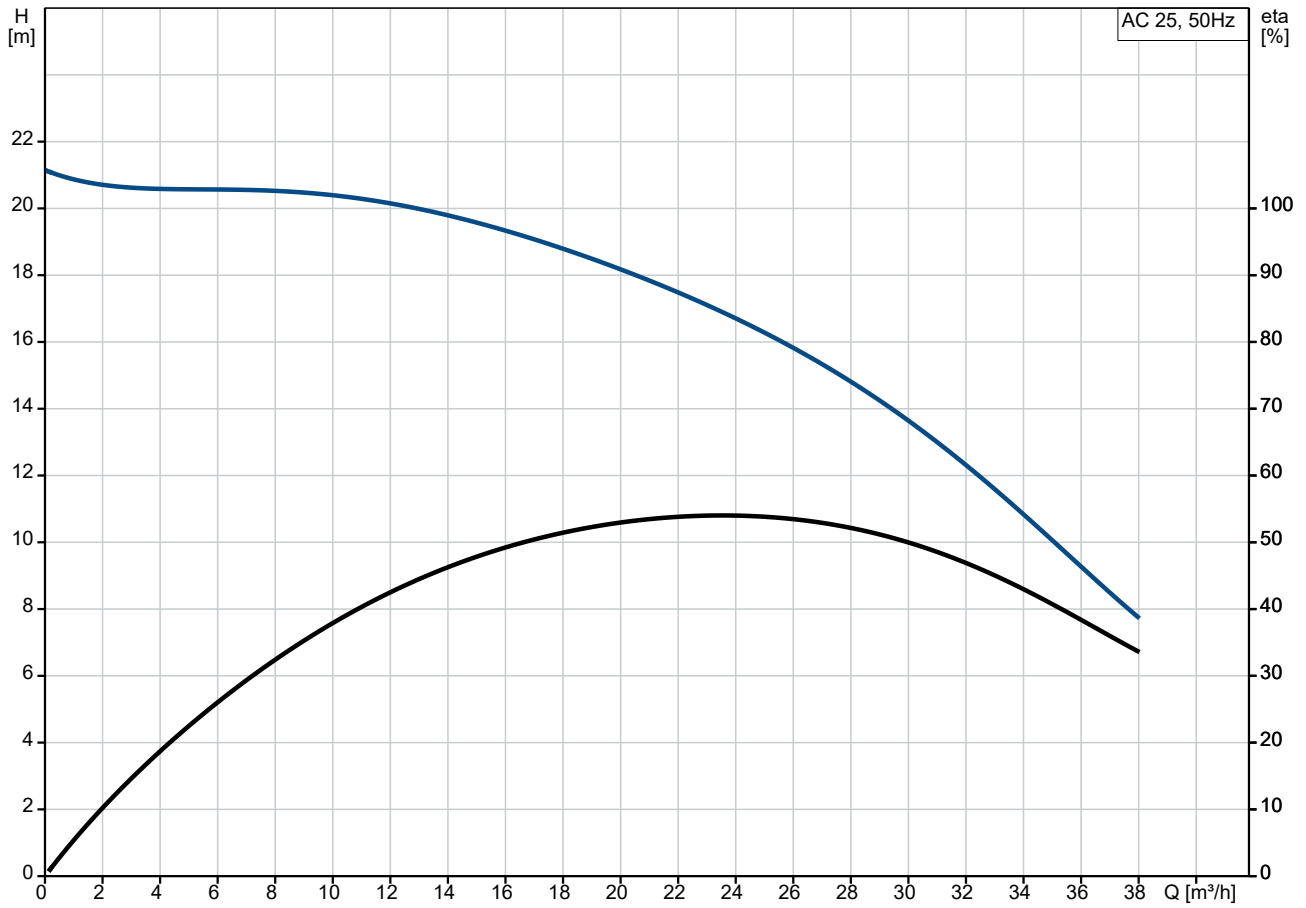

Pumped liquid = Water
 Liquid temperature during operation = 20 °C
 Density = 998.2 kg/m³

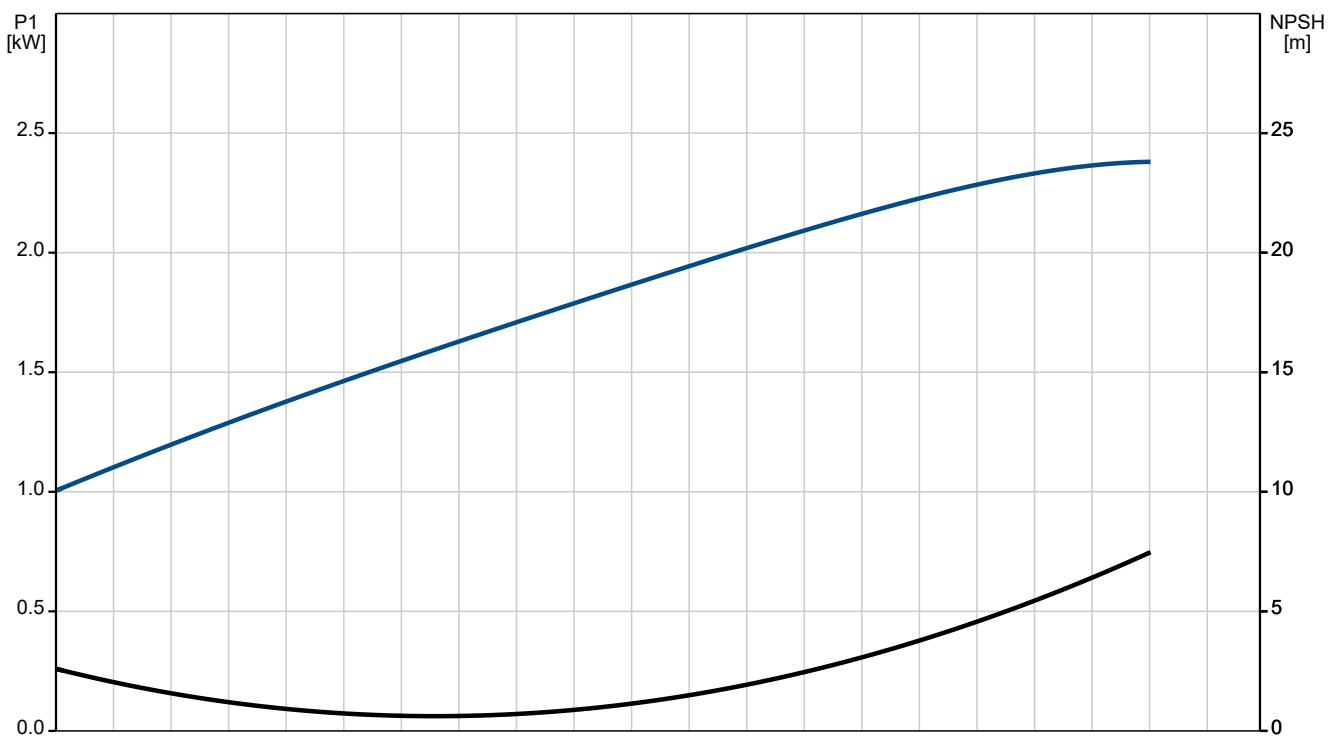

Description	Value
General information:	
Product name:	AC 25 BBQE
Product No:	97671709
Price:	
Technical:	
Max flow:	40.2 m ³ /h
Head max:	21 m
Type of impeller:	CLOSED
Primary shaft seal:	BBQE
Approvals:	CE
Materials:	
Pump housing:	POLYPROPYLENE W.30%GLASS FIBRE
Impeller:	PEI W. 30% GF + BRASS INSERT
Motor:	Aluminium
Rubber:	EPDM
Installation:	
Range of ambient temperature:	-20 .. 65 °C
Maximum operating pressure:	6.5 bar
Pump inlet:	G 2"
Pump outlet:	G 2"
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	-10 .. 55 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m ³
Electrical data:	
Power input - P1:	2300 W
P2:	1898 W
Mains frequency:	50 Hz
Rated voltage:	3 x 400 V
Rated current:	4.3 A
Maximum current consumption:	35.6 A
Cos phi - power factor:	0.776
Rated speed:	2863 rpm
Enclosure class (IEC 34-5):	IP54
Insulation class (IEC 85):	F
Cable size:	NO CABLE
Others:	
Net weight:	17 kg



Pumped liquid = Water
 Liquid temperature during operation = 20 °C
 Density = 998.2 kg/m³

