



BITZER Output data

Created on : 02.12.2020 16:15:38



## Table of content

Selection: Open Screw Compressors OS.....	3
Technical Data: OSK7461-K.....	5
Information: Open Screw Compressors OS.....	6



## Selection: Open Screw Compressors OS

### Input Values

Compressor model	OSK7461-K	Operating mode	Standard
Refrigerant	R404A	Speed	2900 /min
Reference temperature	Dew point temp.	Useful superheat	100%
Liq. subc. (in condenser)	0 K	Additional cooling	Automatic
Suct. gas superheat	10,00 K	Max. discharge gas temp.	80,0 °C

### Result


Q [W]	Cooling capacity	Qac [kW]	Additional cooling
P [kW]	Power input	tcu [°C]	Liquid temp.
COP [ - ]	COP/EER	pm [bar(a)]	ECO pressure
mLP [kg/h]	Mass flow LP	Qsc [kW]	sub cooler capacity (ECO)
mHP [kg/h]	Mass flow HP		

tc	to	10°C	5°C	0°C	-5°C	-10°C	-15°C	-20°C	-25°C
30°C	Q [W]	--	281249	234534	194191	159500	129811	104544	--
	P [kW]	--	43,3	42,5	42,0	41,6	41,3	40,8	--
	COP [ - ]	--	6,49	5,52	4,62	3,83	3,14	2,57	--
	mLP [kg/h]	--	7521	6402	5417	4551	3793	3131	--
	mHP [kg/h]	--	7521	6402	5417	4551	3793	3131	--
	Qac [kW]	--	--	--	--	--	--	--	--
	tcu [°C]	--	29,6	29,6	29,6	29,6	29,6	29,6	--
	pm [bar(a)]	--	--	--	--	--	--	--	--
	Qsc [kW]	--	--	--	--	--	--	--	--
40°C	Q [W]	--	243978	202560	166898	136335	110277	88196	--
	P [kW]	--	53,4	52,8	52,3	51,8	51,2	50,5	--
	COP [ - ]	--	4,57	3,84	3,19	2,63	2,15	1,74	--
	mLP [kg/h]	--	7412	6300	5321	4461	3707	3051	--
	mHP [kg/h]	--	7412	6300	5321	4461	3707	3051	--
	Qac [kW]	--	--	--	--	--	--	--	--
	tcu [°C]	--	39,6	39,6	39,6	39,6	39,6	39,6	--
	pm [bar(a)]	--	--	--	--	--	--	--	--
	Qsc [kW]	--	--	--	--	--	--	--	--
50°C	Q [W]	--	202763	167192	136675	110626	88517	69878	--
	P [kW]	--	65,5	65,3	64,8	64,1	63,4	62,8	--
	COP [ - ]	--	3,09	2,56	2,11	1,73	1,40	1,11	--
	mLP [kg/h]	--	7221	6120	5151	4300	3553	2902	--
	mHP [kg/h]	--	7221	6120	5151	4300	3553	2902	--
	Qac [kW]	--	--	--	--	--	7,01	14,25	--
	tcu [°C]	--	49,7	49,7	49,7	49,7	49,7	49,7	--
	pm [bar(a)]	--	--	--	--	--	--	--	--
	Qsc [kW]	--	--	--	--	--	--	--	--

-- No calculation possible (see message in single point selection)

\*According to EN12900 (10K suction gas superheat, 0K liquid subcooling)


## Application Limits Standard OSK7461

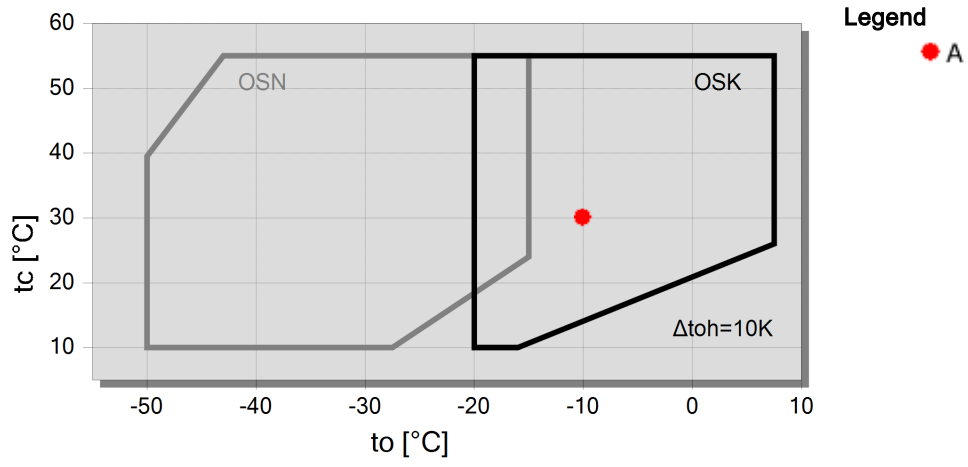



## Technical Data: OSK7461-K

### Dimensions and Connections

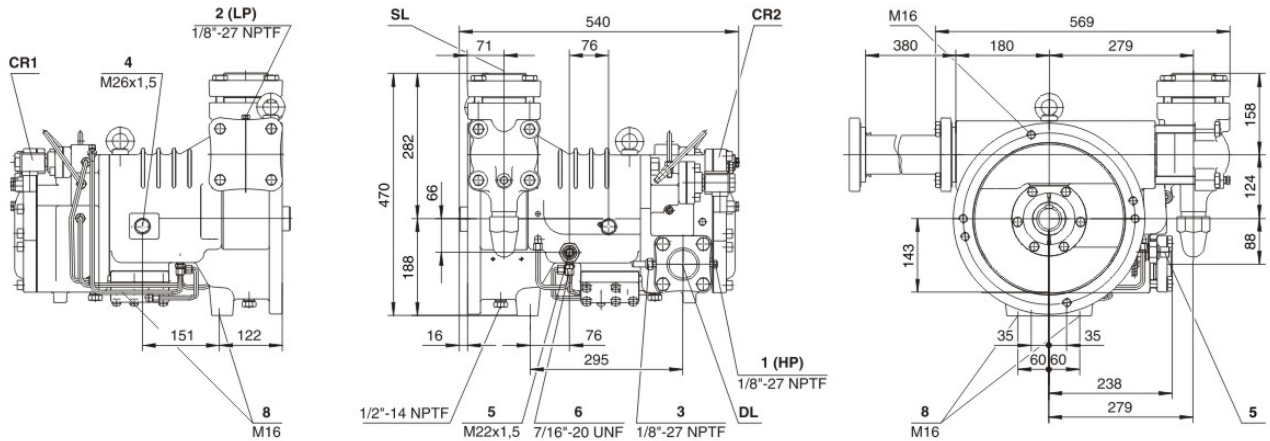

### Technical Data

#### Technical Data

Displacement (2900 RPM 50 Hz)	220 m <sup>3</sup> /h
Displacement (3500 RPM 60 Hz)	266 m <sup>3</sup> /h
Allowed speed range	1450 .. 4000 min-1
Sens of rotation (compressor)	links / counter-clockwise
Weight	176 kg
Max. pressure (LP/HP)	19 / 28 bar
Connection suction line	76 mm - 3 1/8"
Connection suction line (NH3)	DN 80
Connection discharge line	54 mm - 2 1/8"
Connection discharge line (NH3)	DN 50
Oil type R22	B150SH, B100 (Option)
Oil type R134a/R404A/R507A/R407A/R407F	BSE170 (Option)

#### Extent of delivery (Standard)

Suction shut-off valve	Standard
Pressure relief valve	Standard
Check valve	Standard
Oil injection kit	Standard
Built in oil filter	Standard
discharge gas temperature monitoring	SE-B2
Discharge gas temperature sensor	Standard
Start unloading	Standard
Capacity control	100-75-50% (Standard)
Sight glass	Standard
Protective charge	Standard

#### Available Options

Oil flow control	Option
Discharge shut-off valve	Option
ECO connection with shut-off valve	Option
Adapter/shut-off valve for ECO	22 mm - 7/8" (Option)
Coupling housing	Option



## Open Screw Compressors OS

**OSK** = Application for air-conditioning and medium temperature cooling.

**OSN** = Application for low temperature cooling.

**OSH** = Application for air-conditioning and heat pumps.

### Notes regarding application limits (see "T.Data - Limits")

\* Ranges are valid for standart operation and at full-load conditions.

\* With high pressure conditions, part-laod operation is partly limited (see application limits in applications manual SH-500/SH-510).

\* With Economizer operation the maximum admissible evaporation temperature is shifted by 10K downward (otherwise there is a danger of excessive compression and overlaod of the motor because of a higher mass flow). At pull-down conditions from higher evaporation temperatures, the ECO injection must remain closed until the evaporation temperature is below the maximum admissible value and a stable operation is achieved (e.g. control of the ECO solenoid valve by means of a low pressure cut-out). The use of the ECO-System with higher evaporation temperatures requires individual consultation with Bitzer.

### OS53..OS74

\* Capacity control with ECO operation at the same time is limited to one single regulating step (CR 75%). At CR 50% the ECO injection should be closed.

\* Combined operation (ECO + CR 50%) is possible under certain conditions, control and system design, however, require individual consultation with Bitzer.

### Motor Selection

The required driving motor is selected for starting conditions at direct start as well as at star-delta-start with start unloading (50% capcaity regulation). The starting conditions refer to the following defined operation points resp. to the maximum application limit of the compressor. Should the evaporation- or the condensing temperature of the plant be higher at the start, an individual motor selection is necessary.

Evaporation temperature for motor selection				
	HH	H	M	L
R134a	+20 °C	+12,5 °C	-5 °C	
R404A / R507A		+7,5 °C	-5 °C	-15 °C
R22		+12,5 °C	-5 °C	-10 °C
R407C		+12,5 °C	-5 °C	
NH <sub>3</sub>	+25 °C	+12,5 °C	-5 °C	-10 °C

The stated motor data refer to IEC motors at which the pull-up torque should not fall below 90% of the max. torque. In addition the following starting torque (referring to direct start) must be reached:

\* open screw compressors 120%

Should the motor not fulfil these criteria, an individual selection is also necessary.

### Lubricants and additional cooling for NH3 applications

	Type	Viscosity	Discharge gas temp. (°C)	Oil injection temp. (°C)
Reniso KM32	MO	32	ca. 60 .. max. 100	max. 50
Reniso KS46	MO	46	ca. 60 .. max. 80 (100 [1])	max. 60
Reniso KC68	MO	68		
Reflo 68A	MO (HT)	58		
SHC226E	PAO	68		

[1] 100°C only after consultation with BITZER

Further information on the selection of lubricants can be found in the Application Manuals SH-500 and SH-510.

**Legend of connection positions according to "Dimensions":**



- 1 High pressure connection (HP)
  - 1a Additional high pressure connection
  - 1b Connection for high pressure transmitter (HP)
  - 2 Low pressure connection (LP)
  - 2a Additional low pressure transmitter (LP)
  - 2b Connection for low pressure transmitter (LP)
  - 3 Discharge gas temperature sensor connection (HP)
  - 4 Connection for economiser (ECO)
  - HS.85: ECO valve with connection pipe (option)
  - HS.95, OS.85, OS.95: ECO valve (option)
  - 5 Oil injection connection
  - 6 Oil pressure connection for HS.85 and OS.85:
    - Oil drain (compressor housing)
  - 7 Oil drain (motor housing)
    - 7a Oil drain (suction gas filter)
    - 7b Oil drain out of shaft seal (maintenance connection)
    - 7c Oil drain tube (shaft seal)
  - 8 Threaded bore for foot fastening
  - 9 Threaded bore for pipe support (ECO and LI line)
  - 10 Maintenance connection (oil filter)
  - 11 Oil drain (oil filter)
  - 12 Monitoring of oil stop valve
  - OS.85: Monitoring rotation direction and oil stop valve
  - 13 Oil filter monitoring
  - 14 Oil flow switch
  - 15 Earth screw for housing
  - 16 Pressure relief (oil filter chamber)
  - 17 Maintenance connection for shaft seal
  - 18 Liquid injection (LI)
  - 19 Compressor module
  - 20 Slider position indicator
  - 21 Oil level switch
  - 22 Connection for oil pressure transmitter
  - 23 Connection for oil and gas return  
(for systems with flooded evaporator adaptor optional)
  - 24 Acces to oil circulation restrictor
  - SL Suction gas line
  - DL Discharge gas line
- Dimensions can show tolerances according to EN ISO 13920-B.