



SCREW COMPRESSOR S73E – 26

Refrigerating capacity and power consumption

Volume ratio 2.6

STALOMIZER

CAPACITY AND POWER CONSUMPTION

The capacity curves refer to a process with subcooling of the liquid to the intermediate temperature (Stalomizer-temperature) and with no superheating of the suction gas. Correction for STALOMIZER-system with heat exchanger and correction for superheating are to be made according to manual sheet 411-E-10.

Check another built-in volume ratio for best efficiency.

Capacity (60 Hz) = Capacity (50 Hz) × 1.2

Compressor input (60 Hz) = Compressor input (50 Hz) × 1.2

t₁ = condensing temperature

For intermediate temperatures see manual sheet 4840-E-5E.

CONDENSER PERFORMANCE

For condenser performance see manual sheet 4840-E-1.


LIMITATIONS

There are certain limitations in the operation range of the compressor.

For combination of condensing and evaporating temperatures outside the curves, ask for further information.

50 Hz
2950 r/m

Refrigerant : NH₃
Cooled oil

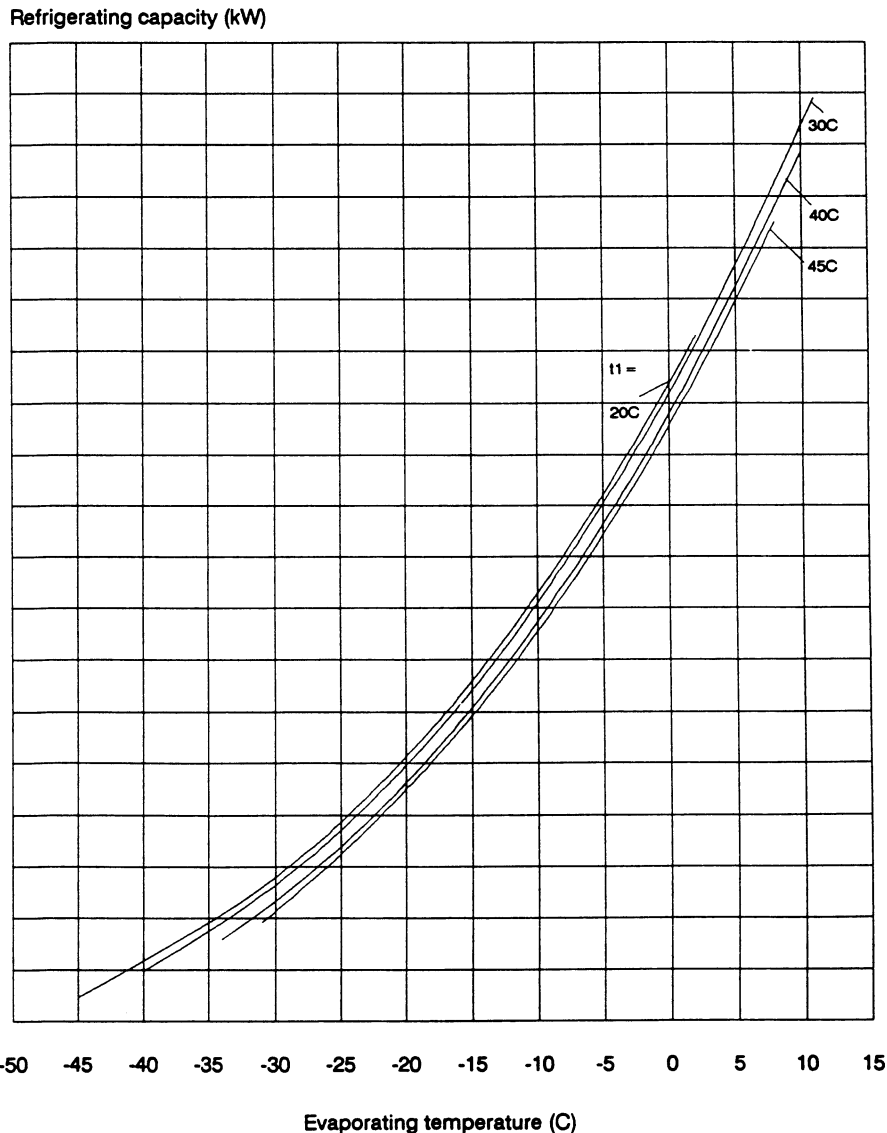

This document must not be copied without our written permission, and the contents thereof must not be imparted to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted. Sabroe Refrigeration



SCREW COMPRESSOR S73E - 26
Refrigerating capacity and power consumption
Volume ratio 2.6
STALOMIZER

Refrigerant : NH₃
Cooled oil

50 Hz
2950 r/m

