



Air cooled chillers

POWERCIAT LX R407C

Screw compressors

CIAT direct expansion

shell and tubes evaporator

Hydraulic pack versions

"Plug and Cool"

H.P.S. equipment (High Power System)



Cooling capacity : 230 to 1100 kW



Cooling



Hydraulic module



Heat recovery



Use

The new generation of **POWERCIAT LX water chillers** offers an optimal solution to all the refrigeration applications encountered in the air conditioning or industrial process.

This range is designed with the latest generation of components : accessible hermetic twin screw compressors, modulating capacity control, communicating control and management by Xtra Connect microprocessor, components optimized for the ecological refrigerant HFC 407C.

This range is also proposed with an integrated hydraulic module : **POWERCIAT LXH**. This one includes all the elements required for a right operation of the unit : buffer tank, expansion vessel, single or twin pump, air vent , pressure relief valves , shut off valves , manometers...

A range with compact hydraulic equipment (without buffer tank) is also available : **POWERCIAT LXC**.

Units in accordance with EN 60-204 - EN 378-2 regulations and directives :

- Machines (98/37 CEE) modified
- CEM (89/336 CEE) modified 92/31 CEE - 93/68 CEE
- Low voltage (73/23 CEE) modified 92/31 CEE - 93/68 CEE
- DESP 97/23 CEE

→ LX - LXH - LXC

- group 2 sizes 1200Z (HPS) to 1850Z (HPS)
- group 3 sizes 2150Z (HPS) to 2800Z (HPS)
- group 4 sizes 3050Z HPS to 4200Z HPS

RANGE

POWERCIAT LX - LXH - LXC

2 compressors, 2 refrigerant circuits :

12 models : 1200Z, 1200Z HPS, 1500Z, 1500Z HPS, 1850Z, 1850Z HPS, 2150Z, 2150Z HPS, 2500Z, 2500Z HPS, 2800Z, 2800Z HPS

3 compressors, 3 refrigerant circuits

4 models : 3050Z HPS, 3400Z HPS, 3750Z HPS, 4200Z HPS

■ CONFIGURATION

- a - **HIGH PERFORMANCE** version
Ventilation 905 rpm
- b - **LOW NOISE** version (LN)
Ventilation 715 rpm + compressors sound insulation
- c - **XTRA LOW NOISE** version (XLN)
Specific mounting for 715 rpm fans + compressors sound insulation



DESCRIPTION

POWERCIAT LX serie

■ Compressors

- Accessible hermetic twin screw type
- Optimized profile of rotors ensuring a high efficiency
- Electrical motor incorporated with part-winding starting
- Motor integral electronic protection
- Control of the phases balance and rotation direction
- Integrated overpressure valve
- Discharge temperature control
- Lubrication under controlled pressure
- 3-stage integrated oil separator
- Crankcase heater
- Suction filter
- Discharge valve
- Slide for modulating capacity control
- Compressors fitted on anti-vibration mounts

■ Evaporator

- Direct expansion shell and tube type
- High performance copper tubes bundle
- Steel shell
- Corrosion resistant baffles
- Thermal insulation by cellular foam with UV resistant polyurethane film

■ Air cooled condenser

- Copper tubes coils, aluminium fins
- Direct drive propeller fans
- Rotation speed : 905 or 715 rpm
- 3 phase electrical motors, IP 54
- Standardized protection grilles

■ HPS (High Power system) on models LX/LXH/LXC...HPS



- The HPS system allows to increase cooling capacity, improves the performance coefficients (EER) of your installation, particularly in part load, and ensures therefore an optimal operation of POWERCIAT during all the year.

■ Refrigerant accessories

- Filter dryers with rechargeable cartridges
- Liquid sight glasses
- Solenoid valves on liquid refrigerant lines
- Thermostatic expansion valves

■ Safety and regulation devices

- HP/LP pressure sensors
- Low and high pressure safety valves
- Chilled water control sensor (inlet and outlet)
- External temperature sensor

- Evaporator antifreeze sensor
- Compressors discharge sensor
- Evaporator water flow switch

■ Electrical panel

- IP 44
- Electrical supply 400 V - 3 ph. - 50 Hz + earth (-5% / +4%)
- Wires numbering and electrical components referencing
- Main fuse disconnect safety switch with external handle
- Transformer for control circuit
- Compressors motors contactors
- Fans motors contactors
- Fuse-protected compressor motors
- Fans motors protection
- Main electrical ground
- Phase monitor (reversal, loss, over and under voltage)

■ Electronic control with microprocessor Xtra connect

ensuring the following main functions :

- 2 remote switchable set points
- Chilled water temperature control
- Possibility of water temperature variation as a function of the outside temperature (water law)
- Low temperature energy storage control
- Condensing pressure control
- Compressors discharge temperature control
- Compressors anti-short cycle control
- Control and optimisation of operating parameters
- Counting and balancing of compressors, pumps operating times
- Automaticity control
- LCD display panel, 2 lines of 20 characters allowing :
- parameterizing of the unit
- direct reading of all information : settings, water inlet/outlet temperatures, outside temperature, HP/LP pressures, unit operating status...
- Faults control with memorization of the last 9 faults and operating logbook when those faults occur
- Weekly management of the unit
- Unit general fault display on terminals
- Automaticity control on terminals
- RS 485 output for bus connection with centralized Building Management System.

■ Capacity control

- Modulating capacity control :
- from 25 to 100 % (sizes 1200Z (HPS) to 2800Z (HPS))
- from 17 to 100 % (sizes 3050Z HPS to 4200Z HPS)

■ Frame and casing

- Frame in RAL 7035 and 7024 painted metal sheet
- Casing in RAL 7035 and 7024 lacquered metal sheet



Air cooled chillers

POWERCIAT LXH serie

The design of POWERCIAT LXH units is identical to the one of POWERCIAT LX

These units integrate the **complete hydraulic equipment** for standard installation :

- 1 insulated buffer tank , capacity : 950 litres
- 1 monocellular centrifugal hydraulic pump (**single or twin** pump)
- 1 expansion vessel (80 litres)
- 1 automatic air vent
- 1 manual air vent
- 1 safety valve calibrated at 4 bars
- A drain hole
- 2 shut off valves for the pump
- 1 set of manometers
- Contactors, protection devices and control for pumps inside the unit electrical panel.

POWERCIAT LXC serie

The design of POWERCIAT LXC units is identical to the one of POWERCIAT LX

These units integrate the **a compact hydraulic equipment**

- 1 monocellular centrifugal hydraulic pump
(single or twin pump)
- 1 expansion vessel (80 liters)
- 1 automatic air vent
- 1 manual air vent
- 1 safety valve calibrated at 4 bars
- A drain hole
- 2 shut off valves for the pump
- 1 set of manometers
- Contactors, protection devices and control for pumps inside the unit electrical panel.

OPTIONS

- **LOW NOISE (LN)** version : ABS phonic insulation casing with sound proof material + 715 rpm fans
- **XTRA LOW NOISE (XLN)** version : ABS sound insulation casing with soundproof material + specific mounting for 715 rpm fans
- Compressors suction valves
- Evaporator antifreeze protection (LX serie)
- Evaporator antifreeze protection + piping + hydraulic equipment (LXH - LXC series)
- Condenser coil treatment :
 - polyurethane coated fins
 - polual blygold coating
- Anti-vibration mounts
- Evaporator flexible connections
- Remote control box
- Voltage free relay card
- Heat recovery with brazed plates desuperheaters (1 per refrigerant circuit)
- Low temperature glycol water
- Electronic expansion valve
- Soft start
- Management of several units MULTICONNECT
- Optimised high pressure
- Fans speed variator
- LonWorks gateway
- Container handling equipment
- Shackles



POWERCIAT LX serie



Air cooled chillers

POWERCIAT LX R407C

VERSION WITH HYDRAULIC EQUIPMENT

LXH - LXC series

The "ALL INTEGRATED" solution

The PLUG and COOL solution offered by POWERCIAT LXH - LXC

The hydraulic equipment integrates all the components necessary for the correct operation of the installation :


- 950 litres insulated buffer tank (**LXH only**)
- 80 litres expansion vessel
- Large choice of single or twin pumps for high head pressure (1)
- Manometers with shut off valves
- Pressure relief valves (calibrated at 4 bars)
- Drain circuit
- Manual and automatic air vent
- Control of the assembly
- Antifreeze protection (optional)

The hydraulic equipment, whose components have been selected in an optimal way, mounted and tested in factory, makes the installation of units easy and economical.

The preparation/commissioning times and the space required on site are therefore perfectly optimised.

(1) Our pumps are designed for operation on a closed water loop (low NPSH). For other applications, consult us (open water circuit, important intake height, etc).

■ Hydraulic equipment LXH serie

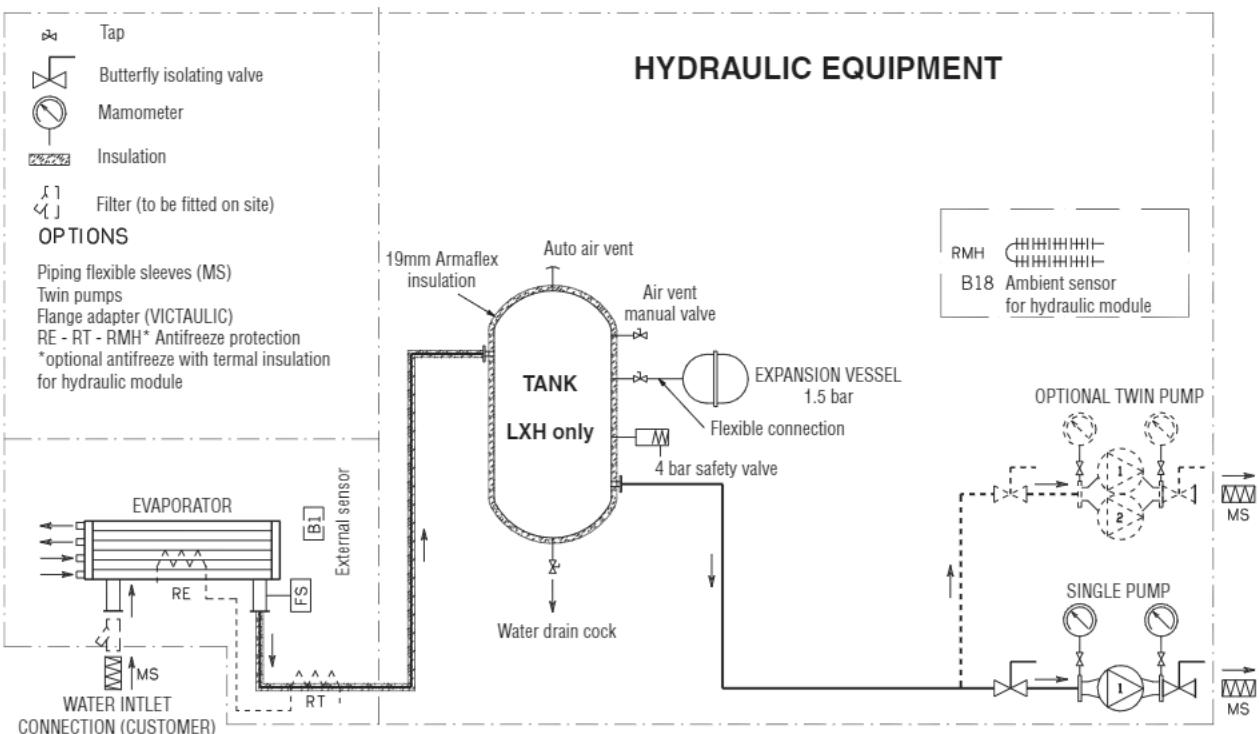



Air cooled chillers

POWERCIAT LX R407C

TECHNICAL CHARACTERISTICS

POWERCIAT LX - LHX - LXC			1200Z	1200Z HPS	1500Z	1500Z HPS	1850Z	1850Z HPS	2150Z	2150Z HPS						
High performance version	Cooling capacity (1)	kW	236	261	305	338	362	409	429	486						
	Absorbed power (2)	kW	101	110	129	140	156	172	184	202						
	EER/ESEER		2.31/2.92	2.37/2.92	2.35/2.94	2.41/2.96	2.32/2.91	2.38/2.98	2.32/2.89	2.41/2.94						
Low noise and xtra low noise versions	Cooling capacity (1)	kW	230	258	300	335	354	402	420	478						
	Absorbed power (2)	kW	101	109	128	138	155	173	182	209						
	EER/ESEER		2.28/2.97	2.37/2.95	2.34/3.05	2.43/3.06	2.27/2.96	2.32/2.96	2.3/2.98	2.29/3.02						
Compressor	Type		Accessible hermetic twin screw													
	Number		2													
	Rotation speed	rpm	2900													
	R407C refrigerant charge (kg)	circ.1	23	24	40	45	55	56	55	56						
		circ.2	23	24	25	26	25	26	45	46						
	Capacity control		Modulating from 25 to 100% (50 to 100% on each compressor)													
Evaporator	Type of oil for R407C		BITZER BSE 170													
	Oil charge for compressor	litres	2 x 9		15 + 9		22 + 9		22 + 15							
	Type		Direct expansion shell and tubes													
	Number		1													
	Water capacity	litres	56,5		68		85									
	Hydraulic connections		VICTAULIC type													
Air cooled condenser	Maximum pressure on water side	bar	10													
	Mini / maxi water flow	m³/h	30 / 82		40 / 100		60 / 135									
	Fans		Direct drive propeller type - 800 mm diameter													
	Number of fans		4		6		8									
	Rotation speed	rpm	HIGH PERFORMANCE version 905 rpm													
	Air flow	m³/h	88 000		136 000		132 000		180 000							
High performance version	Motor unit power	kW	2,6													
	Rotation speed	rpm	LOW NOISE - XTRA LOW NOISE versions 715 rpm													
	Air flow	m³/h	72 400		112 200		108 600		148 400							
	Motor unit power	kW	1,8													
	Lw / Lp (3)	dB(A)	96/64													
	Lw / Lp (3)	dB(A)	98/66													
Low noise version (LN)	Lw / Lp (3)	dB(A)	100/67													
	Xtra low noise version (XLN)	dB(A)	90/58													
	Lw / Lp (3)	dB(A)	92/60													
	Lw / Lp (3)	dB(A)	95/62													
	Lw / Lp (3)	dB(A)	85/53													
	Lw / Lp (3)	dB(A)	87/55													

POWERCIAT LX - LHX - LXC			2500Z	2500Z HPS	2800Z	2800Z HPS	3050Z HPS	3400Z HPS	3750Z HPS	4200Z HPS						
High performance version	Cooling capacity (1)	kW	522	594	605	690	740	820	903	1076						
	Absorbed power (2)	kW	216	238	244	268	287	320	362	413						
	EER/ESEER		2.42/3	2.5/2.95	2.47/3.05	2.57/3.06	2.57/3.26	2.55/3.05	2.49/3.07	2.4/3.07						
Low noise and xtra low noise version	Cooling capacity (1)	kW	509	582	595	685	725	803	881	1045						
	Absorbed power (2)	kW	216	235	240	262	303	331	364	437						
	EER/ESEER		2.36/3.01	2.48/2.95	2.48/3.16	2.61/3.15	2.39/3.21	2.42/3.1	2.42/3.21	2.35/3.13						
Compressor	Type		Accessible hermetic twin screw													
	Number		2													
	Rotation speed	rpm	2900													
	R407C refrigerant charge (kg)	circ.1	55	60	62	63	62	60	60	86						
		circ.1	55	60	62	63	50	60	60	92						
	Capacity control		Modulating from 25 to 100% (50 to 100% on each compressor)													
Evaporator	Type of oil for R407C		BITZER BSE 170													
	Oil charge for compressor	litres	2 x 22		22 + 2 x 15		2 x 22 + 15		3 x 22							
	Type		Direct expansion shell and tubes													
	Number		1													
	Water capacity	litres	122													
	Hydraulic connections		VICTAULIC type													
Air cooled condenser	Maximum pressure on water side	bar	10													
	Mini / maxi water flow	m³/h	60 / 135		80 / 180		80 / 216									
	Fans		Direct drive propeller type - 800 mm diameter													
	Number of fans		8		12		15									
	Rotation speed	rpm	HIGH PERFORMANCE version 905 rpm													
	Air flow	m³/h	176 000		276 000		272 000		268 000							
High performance version	Motor unit power	kW	2,6													
	Rotation speed	rpm	LOW NOISE - XTRA LOW NOISE versions 715 rpm													
	Air flow	m³/h	144 800		228 000		224 400		220 800							
	Motor unit power	kW	1,8													
	Lw / Lp (3)	dB(A)	101/68													
	Lw / Lp (3)	dB(A)	102/69													
Low noise version (LN)	Lw / Lp (3)	dB(A)	96/63													
	Xtra low noise version (XLN)	dB(A)	98/65													
Xtra low noise version (XLN)	Lw / Lp (3)	dB(A)	97/64													
	Lw / Lp (3)	dB(A)	98/65													
Xtra low noise version (XLN)	Lw / Lp (3)	dB(A)	90/57													
	Lw / Lp (3)	dB(A)	91/58													

(1) Cooling capacity for 12°C / 7°C evaporator chilled water and 35°C condenser air inlet.

(2) Compressors + fans absorbed power

(3) Lw : Global sound power level - Lp : Global sound pressure level at 10 metres, in free field, following ISO 3744 regulation



Air cooled chillers

ELECTRICAL CHARACTERISTICS

POWERCIAT LX - LXH - LXC		1200Z	1200Z HPS	1500Z	1500Z HPS	1850Z	1850Z HPS	2150Z	2150Z HPS
COMPRESSORS (1)									
Maximum nominal current	A	216 (2 x 108)		270 (162+108)		324 (216+108)		378 (216+162)	
Part winding starting current (3)	A	377		531		720		774	
Starting current with SOFT START option (3)	A	283		377		506		560	
FAN MOTORS (1)									
Maximum nominal current	A	24		36				48	
HIGH PERFORMANCE version									
Maximum nominal current	A	12,8		19,2				25,6	
LOW NOISE - XTRA LOW NOISE versions									
Maximum nominal current	A	180		240					
Evaporator heating element power	W								
Maximum nominal current	A	0,80		1,05					
LX ANTIFREEZE PROTECTION (OPTION) (2)									
Evaporator + hydraulic pipe + expansion vessel heating element power	W	420		480				540	
Maximum nominal current	A	1,83		2,1				2,35	
LXC ANTIFREEZE PROTECTION (OPTION)									
Evaporator heating element power + piping	W	300		420				480	
Maximum nominal current	A	1,3 (2)		1,83 (2)				2,1	
Hydraulic module heating element power	W			1500					
Maximum nominal current	A			2,3 (1)					
LXH ANTIFREEZE PROTECTION (OPTION)									
Evaporator heating element power + piping	W								
Maximum nominal current	A	4							
Transformer power	VA		1600						
POWERCIAT LX - LXH - LXC		2500Z	2500Z HPS	2800Z	2800Z HPS	3050Z HPS	3400Z HPS	3570Z HPS	4200Z HPS
COMPRESSORS (1)									
Maximum nominal current	A	432 (2 x 216)		492 (2 x 246)		540 (216 + 2 x 162)	594 (2 x 216 + 162)	648 (3 x 216)	738 (3 x 246)
Part winding starting current (3)	A	828		911		936	990	1044	1157
Starting current with SOFT START option (3)	A	614		647		722	776	830	924
FAN MOTORS (1)									
Maximum nominal current	A	48		72				90	
HIGH PERFORMANCE version									
Maximum nominal current	A	1,3 (2)		1,83 (2)					
Hydraulic module heating element power	W			1500					
Maximum nominal current	A			2,3 (1)					
LX ANTIFREEZE PROTECTION (OPTION) (2)									
Evaporator heating element power	W			320					
Maximum nominal current	A			1,40					
LXC ANTIFREEZE PROTECTION (OPTION) (2)									
Evaporator + hydraulic pipe + expansion vessel heating element power	W			560					
Maximum nominal current	A			2,5					
LXH ANTIFREEZE PROTECTION (OPTION)									
Evaporator heating element power + piping	W		560				500		
Maximum nominal current	A		2,5 (2)				2,20 (2)		
Hydraulic module heating element power	W			1500					
Maximum nominal current	A			2,3 (1)					
CONTROL AUXILIARY CIRCUIT (2)									
Maximum nominal current	A			4					
Transformer power	VA		1600				2000		
SINGLE PUMPS (LXH - LXC ONLY) (1)									
Number		102	103	104	105	106	107	108	109
Power	kW	3	4	4	5,5	5,5	7,5	7,5	11
Maximum nominal current	A	6,3	8,0	8,0	10,3	10,3	13,8	13,8	20,0
TWIN PUMPS (LXH - LXC ONLY) (1)									
Number		202	203	204	205	206	207	208	209
Power	kW	3	4	4	5,5	5,5	7,5	7,5	11
Maximum nominal current	A	6,3	8,0	8,0	10,3	10,3	13,8	13,8	20,0

(1) Current for 400V / 3PH / 50HZ voltage

(2) Current for 230V / 1PH / 50HZ voltage

(3) Starting current of the biggest compressor + maximum current of others

compressors in full load

Nominal current for cables selection = add the maximum nominal currents indicated in the above tables



Air cooled chillers

PERFORMANCES

POWERCIAT LX-LXH-LXC HIGH PERFORMANCE version

LX LXH LXC	Evaporator water outlet temperature °C	CONDENSER AIR INLET TEMPERATURE °C												
		26		29		32		35		38		41		
		Pf kW	Pa kW	Pf kW	Pa kW	Pf kW	Pa kW	Pf kW	Pa kW	Pf kW	Pa kW	Pf kW	Pa kW	
1850 Z	Glycol water	-8	226.2	114.0	216.3	119.6	206.2	125.6	194.7	132.0	181.2	138.5		
		-6	246.3	116.2	236.0	117.0	225.0	128.2	213.4	134.7	200.4	141.6		
		-4	267.1	118.5	257.0	115.3	244.5	130.8	232.0	136.5	219.1	144.4		
		-2	290.8	121.1	279.4	127.3	267.5	133.7	254.9	140.6	241.7	147.8	227.6	155.3
		0	312.9	123.5	300.7	129.8	288	136.6	275.3	143.5	261.6	150.8	247.1	158.4
		2	335.7	126.1	323.1	132.5	310.1	139.3	296.5	146.5	282.2	154.0	267.1	161.7
	Pure water	5	380.9	131.4	367.6	138.1	353.2	145.1	338.4	152.6	323.0	160.4	306.8	168.4
		6	394.1	133.0	380.0	139.7	365.2	146.8	350.1	154.4	334.3	162.2	317.6	170.7
		7	406.9	134.5	392.5	141.3	377.6	148.6	361.9	156.1	345.8	164.1	328.9	172.5
		8	420.1	136.2	405.3	143.1	389.9	150.3	374.1	158.0	357.7	166.0	340.4	174.4
		10	451.2	140.2	435.4	147.1	419.2	154.5	402.4	162.3	383.6	171.1	367.3	179.2
		12	479.3	143.9	463.0	150.9	445.6	158.4	428.0	166.2	410.1	174.6	391.5	183.4
1850 Z	Glycol water	-8	261.8	120.3	254.7	126.9	246.3	133.9	236.6	141.3	220.0	148.0		
		-6	282.1	124.8	275.0	129.5	266.1	136.6	256.9	144.3	247.5	153.8		
		-4	302.3	127.3	295.5	132.1	286.4	141.8	276.6	149.8	265.8	158.2		
		-2	327.2	127.9	319.5	135.1	310.6	145.4	301.0	153.7	290.3	162.3	277.9	170.0
		0	348.6	130.3	340.3	140.5	331.8	148.5	322.1	157.1	311.2	165.9	296.8	175.6
		2	371.0	132.9	362.3	143.4	353.6	151.8	343.6	160.6	332.7	169.6	320.4	179.1
	Pure water	5	414.3	141.3	405.6	149.5	396.4	158.4	386.0	167.6	374.2	177.6	361.8	187.2
		6	426.4	142.9	417.8	151.2	408.3	160.2	397.8	169.8	385.6	179.2	372.9	189.4
		7	438.9	144.5	429.3	152.9	419.8	162.0	408.5	171.6	397.4	181.5	384.5	191.9
		8	451.2	146.2	442.0	154.8	432.0	164.0	420.3	174.4	409.2	183.7	396.1	194.3
		10	481.5	146.5	470.7	159.1	460.3	168.6	448.4	178.6	436.0	188.7	423.1	199.7
		12	506.9	153.9	496.3	163.0	484.1	173.3	473.6	182.8	460.3	193.3		
2150 Z	Glycol water	-8	269.3	135.8	257.1	142.0	246.1	149.7	233.0	157.0	216.0	164.8		
		-6	292.4	138.3	280.3	145.2	267.5	152.5	254.0	160.2	239.1	168.3		
		-4	316.2	140.8	303.5	147.9	290.1	155.3	276.0	163.2	261.3	171.5		
		-2	344.9	143.9	331.6	151.1	317.6	158.8	303.1	166.9	287.7	175.3	271.5	184.2
		0	371.0	146.7	356.9	154.0	342.3	161.9	327.1	170.2	311.2	178.8	294.5	187.8
		2	398.1	149.6	383.3	157.1	368.1	165.2	352.2	173.6	335.6	182.4	318.0	191.6
	Pure water	5	452.3	155.7	435.8	163.5	419.1	171.8	401.5	180.5	383.2	189.8	364.8	199.1
		6	467.3	157.4	450.6	165.3	433.1	173.7	415.2	182.5	397.1	191.7	377.9	201.3
		7	482.7	159.3	465.6	167.3	447.9	175.7	429.4	184.5	410.6	193.8	391.1	203.5
		8	498.6	161.2	480.8	169.2	462.5	177.7	442.7	187.1	424.6	196.0	404.8	205.9
		10	535.3	165.8	516.7	173.9	497.3	182.5	477.4	191.6	457.2	201.1	436.5	211.2
		12	569.2	170.2	549.5	178.3	527.7	187.5	508.2	196.1	487.0	205.8	465.3	216.1
2150 Z	Glycol water	-8	312.5	144.8	304.3	152.6	294.6	159.3	284.7	170.8/	273.5	178.0		
		-6	335.6	148.4	327.6	156.6	318.3	165.1	306.8	174.2	290.6	182.8		
		-4	359.2	151.2	351.0	159.6	342.1	168.5	331.2	178.0	319.5	187.9		
		-2	387.4	154.5	379.3	163.4	369.4	172.5	359.3	182.2	347.4	192.5	333.0	200.8
		0	412.8	157.5	404.1	166.5	394.3	176.0	383.7	186.0	371.5	196.4	358.1	207.5
		2	439.2	160.7	430.3	170.0	420.1	179.7	410.4	190.6	396.7	200.6	382.9	211.8
	Pure water	5	490.6	167.0	481.8	177.0	470.2	187.1	458.4	197.9	445.6	209.3	431.4	221.1
		6	505.1	168.8	495.3	178.9	484.0	189.8	471.9	200.0	459.1	211.6	444.8	223.6
		7	520.2	170.9	510.0	181.0	498.5	191.7	486.1	202.4	473.0	214.2	458.3	226.2
		8	535.0	172.8	524.3	183.0	512.5	193.5	499.9	204.7	486.7	216.7	474.1	225.4
		10	569.2	177.3	557.0	188.4	546.0	198.8	533.1	210.5	518.5	222.6	506.3	231.2
		12	600.3	181.6	589.4	192.4	576.4	203.3	562.9	215.3	547.9	227.7		

Pf : Cooling capacity calculated with :
- water inlet/outlet differential as per curves page 16
- 0.00005 m² °C/W fouling factor
Pa : Compressors + fans absorbed power

Glycol water is necessary
Low temperature option necessary
EUROVENT conditions



Air cooled chillers

PERFORMANCES

POWERCIAT LX-LXH-LXC LOW NOISE (LN) - XTRA LOW NOISE (XLN) versions

LX LXH LXC	Evaporator water outlet temperature °C	CONDENSER AIR INLET TEMPERATURE °C										
		26		29		32		35		38		
		Pf kW	Pa kW	Pf kW	Pa kW	Pf kW	Pa kW	Pf kW	Pa kW	Pf kW	Pa kW	
1850 Z	Glycol water	-8	223.0	110.6	213.2	116.3	203.0	122.3	191.5	128.7		
		-6	242.6	113.0	232.2	118.8	221.3	125.1	209.6	131.7		
		-4	262.9	115.5	251.8	121.5	239.9	127.9	227.7	134.6		
		-2	286.6	118.5	275.0	124.9	263.3	131.3	250.5	138.3	237.2	145.5
		0	308.2	121.2	296.1	127.6	283.5	134.4	270.2	141.4	256.4	148.8
		2	330.4	124.0	317.7	130.6	304.6	137.6	290.7	144.8	275.6	152.7
	Pure water	5	374.5	129.9	360.4	136.8	345.6	144.3	330.8	151.8	315.5	159.4
		6	386.6	131.7	372.3	138.6	357.5	145.9	342.2	153.5	326.5	161.4
		7	399.0	133.4	384.5	140.4	369.8	147.9	353.7	155.5	337.6	163.5
		8	412.0	135.3	396.8	142.3	380.0	150.3	365.3	157.5	348.7	165.6
		10	441.5	139.7	425.7	146.9	409.0	154.4	392.4	162.3	375.4	170.3
		12	468.5	143.7	451.0	151.3	434	159	417.0	166.7	398.9	175.1
1850 Z	Glycol water	-8	259.1	117.5	251.6	124.2	243.3	131.4	234.8	137.0		
		-6	280.0	120.3	271.7	129.4	262.6	136.7	253.0	142.3		
		-4	300.1	122.9	291.7	132.5	283.7	140.3	272.5	148.2		
		-2	323.8	126.0	315.8	136.3	306.6	144.2	297.8	152.9	285.4	161.3
		0	345.3	131.8	336.4	139.4	327.4	147.7	317.2	156.6	305.5	165.2
		2	366.3	134.7	358.0	142.9	346.1	150.8	338.4	160.3	327.2	169.7
	Pure water	5	409.8	141.3	399.9	149.8	390.1	158.8	379.5	168.3	367.5	178.0
		6	422.3	139.7	410.7	151.9	401.8	160.9	391.6	166.8	378.6	180.5
		7	433.7	145.1	423.5	153.9	413.4	163.2	401.7	172.9	390.8	178.8
		8	445.4	146.8	436.2	156.3	425.1	165.3	413.4	175.3	401.1	185.4
		10	474.1	152.0	463.8	160.7	452.5	170.6	440.3	180.4	427.9	191.7
		12	499.4	156.0	488.6	165.1	477.1	175.2	464.8	185.5		
2150 Z	Glycol water	-8	266.3	131.1	255.1	137.8	241.6	144.9	228.2	152.4		
		-6	289.0	133.8	276.6	140.7	263.9	148.1	250.3	155.8		
		-4	312.4	136.6	299.3	143.7	285.9	151.2	272.0	159.1		
		-2	340.4	139.9	326.9	147.3	312.7	155.0	298.2	163.1	282.4	171.7
		0	365.6	143.0	351.5	150.5	336.8	158.4	321.4	166.8	305.4	175.3
		2	392.1	146.3	377.1	153.9	361.8	162.0	345.7	170.4	329.0	179.3
	Pure water	5	444.4	153.0	428.2	161.1	410.8	169.3	393.4	178.0	375.4	187.2
		6	459.0	155.0	441.1	163.4	424.6	171.4	406.8	180.2	388.4	189.5
		7	473.8	157.0	456.6	165.1	438.8	173.6	420.3	182.5	401.6	191.8
		8	488.9	159.1	471.2	167.3	453.1	175.8	434.1	184.8	415.0	194.2
		10	524.3	164.1	505.6	172.4	486.2	181.0	466.4	190.2	446.3	199.9
		12	556.9	168.9	537.0	177.1	516.7	185.9	496.1	195.2	474.6	205.1
2150 Z	Glycol water	-8	310.0	140.8	299.8	148.5	291.1	157.0	282.4	167.5		
		-6	332.8	144.7	324.2	153.0	314.8	161.9	304.6	171.6		
		-4	356.0	147.9	347.2	156.5	337.8	165.5	329.7	175.0		
		-2	384.6	151.9	375.1	160.5	365.1	170.0	354.4	179.8	341.5	190.1
		0	408.9	155.0	399.8	164.3	389.4	173.9	378.3	184.1	365.7	194.6
		2	434.7	158.6	425.7	168.4	414.7	178.2	403.0	188.5	390.2	199.3
	Pure water	5	485.8	172.6	475.4	182.4	463.8	192.9	451.2	203.8	438.1	215.4
		6	499.7	174.6	489.3	184.8	477.6	195.3	465.0	206.3	450.8	218.1
		7	513.8	176.6	502.9	186.9	491.9	198.0	478.4	208.9	464.6	220.7
		8	528.3	178.8	517.4	189.3	505.2	200.1	492.5	211.5	478.6	223.7
		10	562.0	177.8	549.7	188.2	537.7	199.7	523.9	211.5	511.8	219.7
		12	592.4	182.5	580.0	193.3	567.2	205.0	551.8	217.6		



Pf : Cooling capacity calculated with :
 - water inlet/outlet differential as per curves page 16
 - 0.00005 m² °C/W fouling factor
 Pa : Compressors + fans absorbed power

Glycol water is necessary
 Low temperature option necessary
 EUROVENT conditions






Air cooled chillers


DIMENSIONS LXC

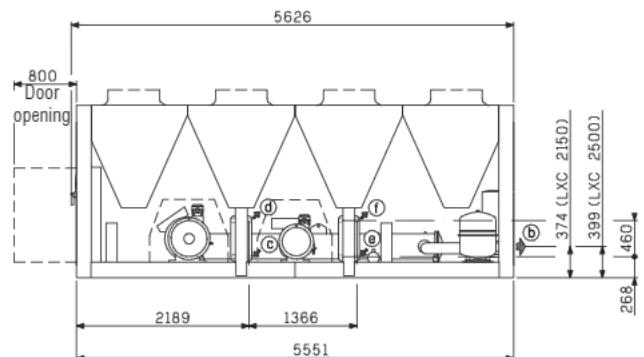

** For XTRA LOW NOISE version only

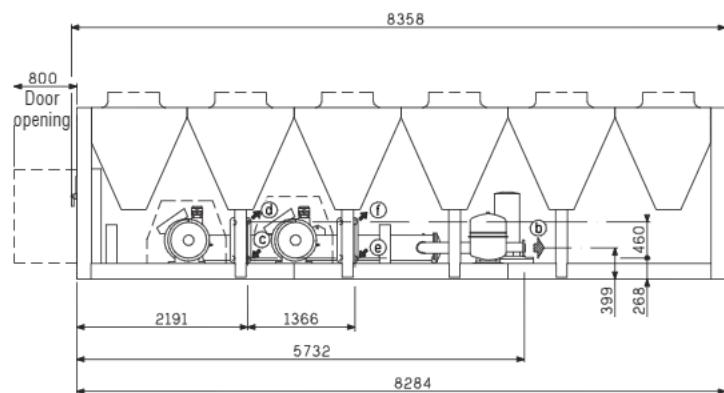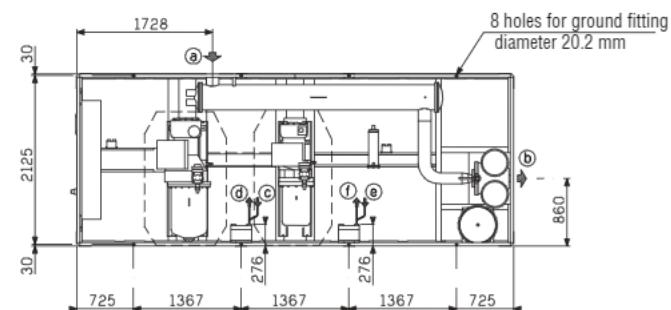

** For XTRA LOW NOISE version only

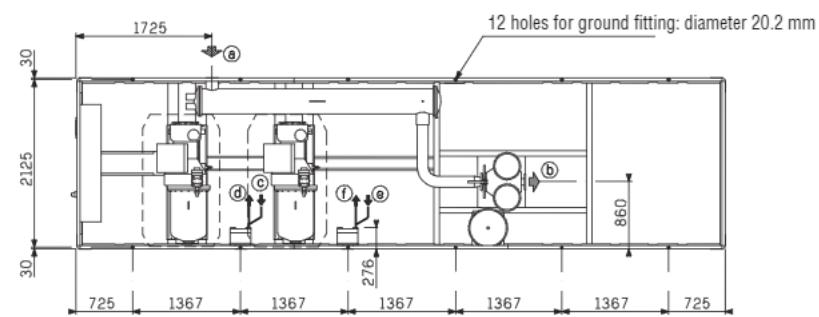

Models	Fig.	Chilled water		Desuperheaters hot water		Weight kg	
		inlet LXC a	outlet LXC b	inlet LX / LXC / LXH c - e	outlet LX / LXC / LXH d - f	empty	in operation
LXC 2150Z (HPS)	3	VICTAULIC DN 125	*	G 2"	G 2"	5002	5217
LXC 2500Z (HPS)	3	VICTAULIC DN 150	*	G 2"	G 2"	5527	5777
LXC 2800Z (HPS)	4	VICTAULIC DN 150	*	G 2"	G 2"	6421	6671

* b according to the selected pump (see page 30)

NOTE : Brazed plates desuperheaters optional (1 per refrigerant circuit) available for versions LX - LXC - LXH