

LG Renewable Heating Solutions







Products in this

chure contain fluorinated greenhouse gases (R410A) and (R134a)

Energy Related Product (ErP)

European Eco design rules (the ErP rules) have become an effective tool to drive European consumers towards products with reduced environmental impact and increased energy performances. Air-to-water heat pump product category must meet strict criterias for efficiency, while our customers will also be able to make more informed choices thanks to the energy labeling that accompanies LG's THERMA V range.

The energy class of the product indicated on the energy label reflects the seasonal space heating efficiency.

The energy efficiency of heat pumps is based upon their Seasonal Coefficient of Performance, calculated by taking the annual heat demand of the building and dividing it by the annual energy consumption, while considering the consumption of back-up systems and the regional location of the heat pump.

LG THERMA V products' efficiency is calculated according to the average climate zone of Strasbourg.

Last but not least, water-based heat pumps are relying on a renewable energy for their functioning and it is important to keep in mind that the increased use of renewable energy in Europe will also reduce our energy dependency.



Example ErP label

European Standards

LG Electronics is committed to product excellence, hence why we participate in different national and European certification schemes. Third party certification allows LG customers to compare our products' efficiency with other manufacturers on an equal footing, so as to make informed choices, based on the highest performance standards. In addition, LG THERMA V products that hold a third party performance certificate can often benefit from national bonus schemes that make the product more affordable for the customer.

In the UK, MCS certification on THERMA V allows its holders to benefit from the Renewable Heat Incentive payments. In France, NF PAC enables the implementation of THERMA V in new built projects, where the French building regulation (RT 2012) promotes the use of highly efficient products, certified by an independent organism. Additionally, the French tax bonus can only benefit to the holders of the NF PAC certificate for air-to-water heat pumps. Lastly, Eurovent heat pump certification grants recognition to THERMA V product performance across all European countries.

Certification benefit

- MCS (UK): RHI (Renewable Heat Incentive) tariff 10.18Pence / kWh for 7 years
- NF PAC (France) : Promoted in the context of Thermal Regulation RT 2012.

Tax Refund (15%~25% of product cost)

- EUROVENT (EU) : Model registration at the EUROVENT website



LG Energy Research and Development Lab

LG THERMA V has passed through the severe testing condition at the Energy Lab which is located in northern France. It can prove LG THERMA V is designed to make sure the steady performance and reliability under European winter condition.



About LG THERMA V?

The LG THERMA V is designed to create incomparable customer values like energy saving, comforts, easy controls and services by applying advanced technologies.

The LG Inverter Technology provides excellent energy efficiency with optimal components such as water pump, heat exchanger and fan motor. Pressure control technology provides stable heating capacity at low temperature and reaches target performance without difficulties.

The differentiated structure like the 'true' all-in-one type, gold-fin and user-oriented functions enhance professionals reputations as well as end-user happiness by experiencing the LG's full line-up from 3kW to 16kW in heating capacity.





THERMA V is LG's Air to Water Heat Pump system, especially designed to provide heating and/ or domestic hot water to new housing and renovations.

Energy Efficient Application

THERMA V offers the best solution for home heating and hot water supply with LG's inverter technology.

It is more energy efficient than a conventional boiler system by absorbing energy from the outdoor environment.

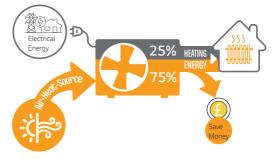


Image above: Example diagram 'How an air to water heat pump works'.

Various Application

Various kinds of application is possible with THERMA V units including new builds and renovations.


New Build

With low temp. monobloc and split model, heating and cooling can be done.





Image above: Example diagram showing different heat emitters, for illustration only.

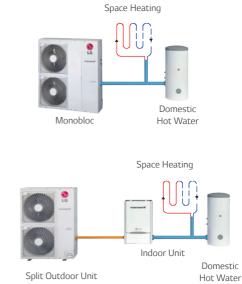

LG's 7 Years Warranty

LG and it's distributors provide various levels of technical support to cover model selection, quotations, installation and commissioning.



The Therma V heat pump comes with a standard warranty of 3 years if installed and maintained correctly.

For companies who have attended and passed the Therma V technical product training course and are MCS registered they can gain access to LG's extended product warranty. Ensure your installer has attended the course by checking with one of our distirbutors. Find our heating distributors online: http://www.lg.com/uk/business/find-the-dealer

Optimal Application

Advanced model selection software enables designers to choose the optimal THERMA V model based on the location and environmental factor, to ensure that the right model is selected for your home.

Renovation

THERMA V can be connected to an existing boiler system to optimise energy efficiency and heating capacity for renovation.

THERMA V High Temperature can replace the entire system completely as it provides 80° C hot water.



Image above: Example diagram showing different heat emitters, for illustration only.

Space Heating (Max 80°C)



Solar Connection

Simple accessory kit can be provided to connect to new or exsiting solar thermal panel. Both monobloc and low temperature split type systems.



Reliability

LG's Therma V renewable heating system is extremely reliable. In the unlikely event of a failure the system incorporates a back up heating system, so you will not be without heating or hot water.

Therma V also comes with a long warranty of 7 years providing your system is maintained annually in accordance with the manufactures guidelines.

The Fight so

LG THERMA V

Hola



Energy Efficient

Using the most energy efficient components, class A water pump, LG designed and manufactured compressor.


Therma V is A+ or A++ rated.

Low Noise System

The fans have been designed in a way to reduce noise and enhance air flow.

Anti-Legionella Function

By setting Anti-legionella operation mode on, THERMA V heats the whole water tank automatically once a week until water temperature reaches up to 80°C to de-sanitise.

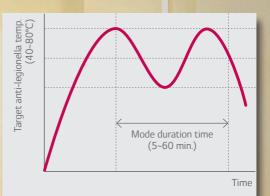

Weather Dependent Operation

- un

If users choose this mode, setting temperature will follow outdoor temperature automatically. If the outdoor temperature decreases, heating capacity for the house will increase automatically in order to keep comfortable heating performance according to meather.



The THERMA V Product Range

All Therma V systems are inverter driven and highly energy efficient. Therma V can be used in replace of a conventional fossil-fuel boiler systems, able to connect to raidators, underfloor heating, fan coil units and domestic hot water cylinders. A simple accessory kit can connect to new or existing solar thermal panels.



Corrosion Resistant Heat Exchanger


LG's Outdoor Heat Exchanger is coated with a gold-coloured anti-corrosive acryl resin treatment on the aluminum coil, to prevent corrosion. This maintains excellent heat transfer properties of the coil for an extended time, whereas non-Gold Fin[™] coils progressively lose efficiency due to surface corrosion. Gold Fin[™] is perfect for areas with high pollution or locations exposed to saltwater spray from the sea.





• Gold Fin is long lasting, durable and makes the Outdoor Unit look prestigious.

Diagram of a monobloc installation, connecting to a variety of heat emitters.

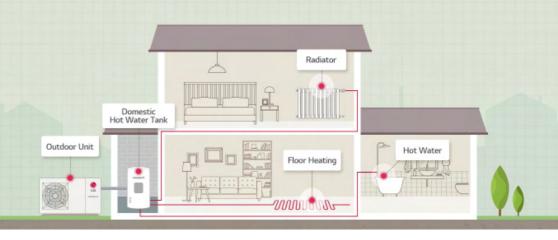

THERMAV

Easy to Use

With multi-line, back-lit stylish and intuitive controller. Online step-by-step video guides, includes; Scheduling, Mode change, Setting Time, Weekly reservation, Holiday mode, Sanitary water heating operation and child lock programming.

http://bit.ly/1MEU1Y3



Monobloc - Water temperature up to 57°C

LG provide the true all-in-one air to water heat pump monobloc, with the 4 main components fitted at the factory. No need to work with refrigerant piping for easier and guicker installation.





Therma V Monobloc at 55°C is A+ Therma V Monobloc at 35°C is A++

| MONOBLOC (OUTDOOR UNIT) | | Capacity | 5kW 1Ø | 7kW 1Ø | 9kW 1Ø HM091M.U42 | | | | |
|--------------------------------------------|--------------------|-----------|--------------------|-------------------|----------------------|--|--|--|--|
| | | Reference | HM051M.U42 | HM071M.U42 | | | | | |
| Nominal Capacity | Heating (A7 / W35) | kW | 4.99 | 7.00 | 9.00 | | | | |
| COP | Heating (A7 / W35) | | 4.42 | 4.29 | 4.09 | | | | |
| Dimension | WxHxD | mm | 1,239 x 907 x 390 | 1,239 x 907 x 390 | 1,239 x 907 x 390 | | | | |
| Weight | | kg | 97 | 98 | 99 | | | | |
| Sound Power Level (Heating) | | dB (A) | 63 | 65 | 65 | | | | |
| Outdoor Air Operation Range | Heating | °C DB | -20 ~ 35 | | | | | | |
| Leaving Water Temp. Range | Heating | °C | 15~57 | | | | | | |
| | GWP | | | | | | | | |
| Seasonal Space Energy Efficiency Class | 35°C / 55°C | | A++ / A+ | A++ / A+ | A++ / A+ | | | | |
| Seasonal Space Energy Efficiency (average) | 35°C / 55°C | % | 160/110 | 155/112 | 161/114 | | | | |
| | 35°C / 55°C | kW | 6/5 | 7/6 | 7/7 | | | | |
| Annual Energy Consumption (average) | 35°C / 55°C | kWh | 3,119 / 3,707 | 3,631 / 4,641 | 3,761 / 4,638 | | | | |
| Water pump EEl ≤ | | | 0.20 | 0.20 | 0.20 | | | | |
| Power Supply | | P/V/Hz | 1 / 220 - 240 / 50 | | | | | | |

Note

Truce: Capacities and power inputs are based on the following conditions: 1. Heating conditions - Inlet/Outlet Water Temperature 30°(7)5°C; Outdoor Air Temperature 7°CDB/6°CWB 2. Wring cable size must comply with the applicable local and national code. 3. The specification may be subject to change without prior notice for purpose of improvement. 4. Sound power levels measured at In away from 15 m height. This product contains fluorinated greenhouse gases (R410A). Oil models base on a lorster heating soli-for for accession to the production use to the production as power to the product on the p

All models have an electric heating cable for frost prevention, from condensing water at the condensing pan All specifications are based on EN14511 and EN14825

12-14-16kW monobloc units also available in 3 phase option



| MONOBLOC (OUTDOOR UNIT) | | Capacity | 12kW 1Ø | 14kW 1Ø | 16kW 1Ø | 12kW 3Ø | 14kW 3Ø | 16kW 3Ø | |
|-------------------------------------------------------|--------------------|-----------|---------------------|----------------|---------------|-------------|----------------|---------------|--|
| | | Reference | HM121M.U32 | HM141M.U32 | HM161M.U32 | HM123M.U32 | HM143M.U32 | HM163M.U32 | |
| Nominal Capacity | Heating (A7 / W35) | kW | 12.00 | 14.00 | 16.00 | 12.00 | 14.00 | 16.00 | |
| COP | Heating (A7 / W35) | | 4.49 | 4.44 | 4.20 | 4.49 | 4.44 | 4.20 | |
| Dimension | WxHxD | mm | 1,239 x 1,450 x 390 | | | | | | |
| Weight | | kg | 141 145 | | | | | | |
| Sound Power Level (Heating) | | dB (A) | 67 | | | | | | |
| Outdoor Air Operation Range | Heating | °C DB | -20 ~ 35 | | | | | | |
| Leaving Water Temp. Range | Heating | °C | 15~57 | | | | | | |
| Seasonal space energy efficiency class | 35°C / 55°C | | A++ / A+ | A++ / A+ | A++ / A+ | A++ / A+ | A++ / A+ | A++ / A+ | |
| Seasonal space heating energy efficiency (average) | 35°C/55°C | % | 166/121 | 166 / 121 | 164/121 | 174/124 | 164/124 | 163/124 | |
| Rated heat output (average) | 35°C / 55°C | kW | 11/10 | 12/10 | 12/10 | 11/11 | 12/11 | 11/13 | |
| Annual Energy Consumption (average) | 35°C / 55°C | kWh | 5,536 / 6,698 | 5,819 / 6,698 | 6,094 / 6,698 | 5,812/7,078 | 5,922 / 7,078 | 6,210 / 7,078 | |
| Power Supply | | P/V/Hz | | 220-240, 1, 50 | | | 380-415, 3, 50 | | |

Capacities and power inputs are based on the following conditions: 1. Heating conditions - Inlet/Outlet Water Temperature 30°C/35°C; Outdoor Air Temperature 7°CDB/6°CWB

Wiring cable size must comply with the applicable local and national code.
The specification may be subject to change without prior notice for purpose of improvement.



LG Electronics

Web: www.lg.com/uk/heating

For continual product development, LG reserves the right to change specifications without notice.

Information on the complete range of LG Air Conditioning and Energy Solutions is available on our website. You can also download from PDF versions from our website. Whilst every care has been taken in the preparation of this catalogue, some changes may have occurred since publication. LG Electronics cannot accept responsibility for errors and omissions.

LG Electronics UK Limited have been working closely with their supplier's to reduce their environmental impact on the world.

Copyright © 2018 LG Electronics. All rights reserved. Printed in the UK.

Distributed by

LGUKTHVmidCat.07/18