

DWM COPELAND

Replacement Guidelines for DWM Compressors

D9R* with D2S* & D3S*




EMERSON[™]
Climate Technologies

1 Introduction

Emerson Climate Technologies has successfully introduced many new semi-hermetic compressors in the market over the past years - in particular in the medium size range from 5 to 15 hp with the model families D2S and D3S - a result of continuous engineering effort leading to improved compressors for refrigeration applications. D2S and D3S DWM Copeland™ compressors are available for low, medium and high temperature applications.

The new line of compressors D2S, D3S was developed to give better performances than the former models and to provide larger application envelopes.

Completion of the D3S product familie puts Emerson Climate Technologies in a position to eliminate some of its older compressor models, making it easier for customers to manage stock and save costs. Benefits of the D3S family include the universal compressor models for medium and low temperature applications.

Transition of semi-hermetic models from R to S product line


The table below lists existing products and their recommended replacements:

Old	Replacement
D9RA 500L AWM/D	D2SK 65X EWL/D
D9RA 750 AWM/D	D3SA 750 AWM/D
D9RC 750 AWM/D	D3SC 750 AWM/D
D9RC 750L AWM/D	D3SC 75X AWM/D
D9RC 1000 AWM/D	D3SC 1000 AWM/D
D9RS 1000 AWM/D	D3SS 1000 AWM/D
D9RS 1000L AWM/D	D3SS 100X AWM/D
D9RS 1500 AWD	D3SS 1500 AWM/D

Other replacements indicated must be considered as general recommendations. They may differ from the product which they are replacing in performance and mechanical details.


2 Nomenclature

D 9 R A 750 AWM

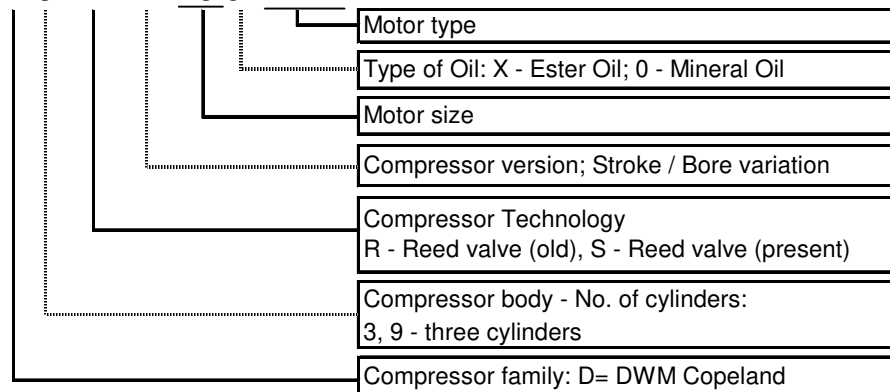


3 Application envelopes

D9RA 750 vs. D3SA 750

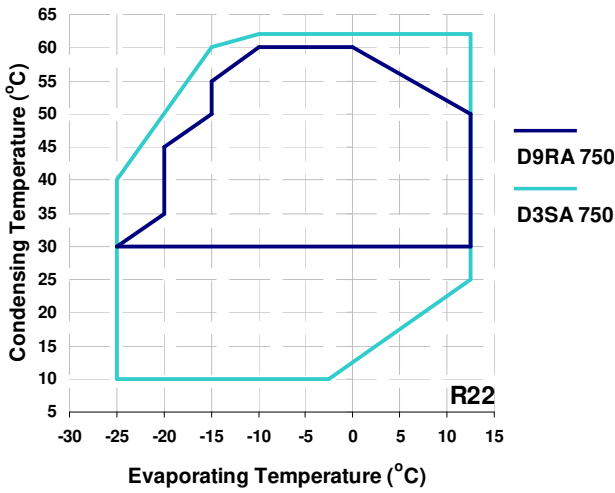



D9RC 1000 vs. D3SC 1000
D9RS 1500 vs. D3SS 1500

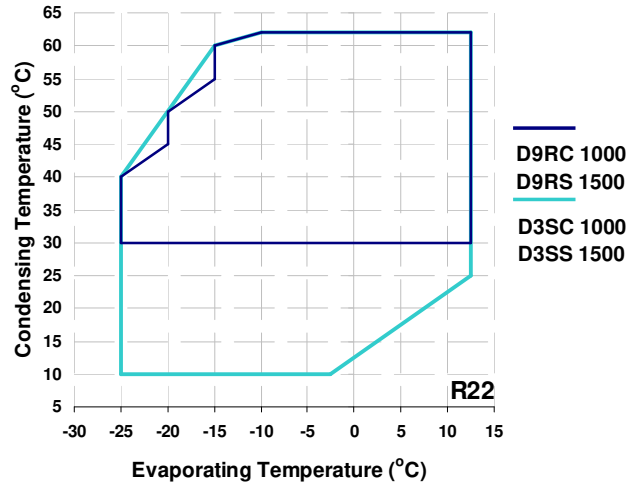

D9RC 750L, D9RS 1000L

vs.

D3SC 75X, D3SS 100X

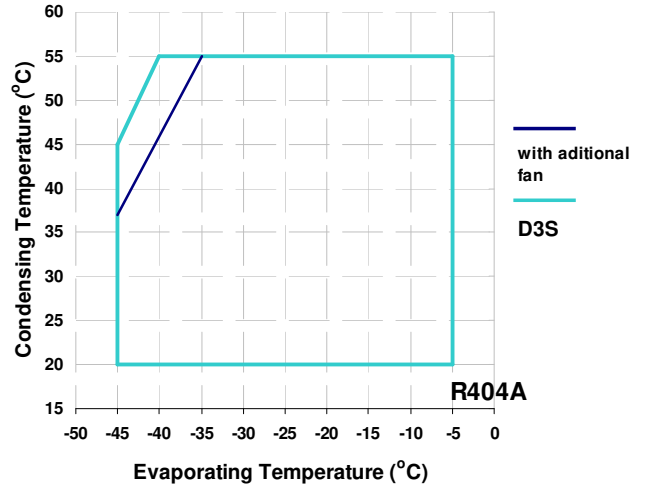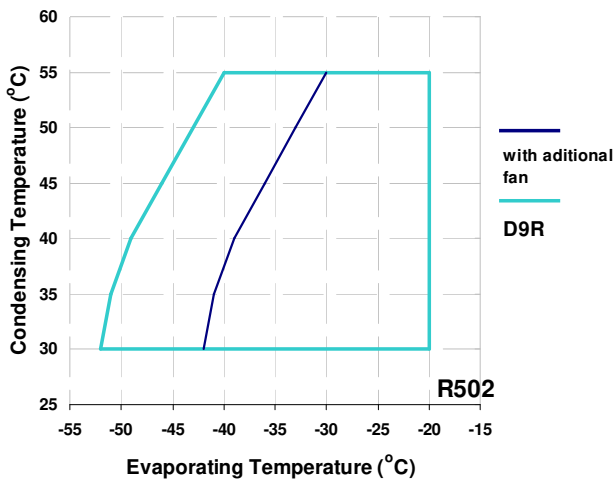

4 Cross reference tables

	D9RA 500L	D2SK-65X
R502 / R404A	-45°C ... -20°C	-45°C ... -5°C
Swept volume m3/h	32.1	Same
Mountings	381 X 305	295 X 279
Length	690	560
Width	335	330
Height	480	395
Disch. Valve Position H/L		Same
Suction Valve Ø	1 3/8"	1 1/8"
Vanne Ref Position H/L		+10 / +50
Disch. Valve Ø	7/8"	7/8"
R502 / R404A	-35°C/40°C	
Capacity [kW]	4.5	4.86
Power Input [kW]	3.9	3.98
COP	1.15	1.22
Current [A]	7.25	8.7
Mass Flow [g/s]		36.72

	D9RA 750	D3SA 750/X
R22	-20°C ... 12.5°C	-25°C ... 12.5°C
Swept volume m3/h	32.1	Same
Mountings	381 X 305	Same
Length	730	655
Width	335	370
Height	480	Same
Disch. Valve Position H/L		Same
Suction Valve Ø	1 3/8"	Same
Vanne Ref Position H/L		+10 / +50
Disch. Valve Ø	1 1/8"	1 1/8"
R22	-10°C/45°C	
Capacity [kW]	14.46	14.36
Power Input [kW]	6.06	6.42
COP	2.38	2.24
Current [A]	11.46	12.5
Mass Flow [g/s]	87	86.42

	D9RC 750L	D3SC 750/X
R502 / R404A	-45°C ... -20°C	-45°C ... -5°C
Swept volume m3/h	37.9	Same
Mountings	381 X 305	Same
Length	690	655
Width	335	370
Height	480	Same
Disch. Valve Position H/L		Same
Suction Valve Ø	1 3/8"	Same
Disch. Valve Position H/L		+10 / +50
Disch. Valve Ø	1 1/8"	Same

	-35°C/40°C	
R502 / R404A		
Capacity [kW]	5.35	5.5
Power Input [kW]	4.6	4.32
COP	1.16	1.27
Current [A]	9.45	9.99
Mass Flow [g/s]		41.55

	+5°C/40°C	
R12/R134a		
Capacity [kW]	20.8	28.55
Power Input [kW]	7.41	8.3
COP	2.81	3.44
Current [A]	19.6	15.65
Mass Flow [g/s]		185.88

	D9RS 1000L	D3SS 1000/X
R502 / R404A	-45 ... -20°C	-45°C ... -5°C
Swept volume m3/h	49.9	Same
Mountings	381 X 305	Same
Length	690	680
Width	335	370
Height	480	Same
Suction Valve Position		Same
Suction Valve Ø	1 3/8"	Same
Disch. Valve Position H/L		+10 / +50
Disch. Valve Ø	1 1/8"	Same

	-35°C/40°C	
R502 / R404A		
Capacity [kW]	7	8.15
Power Input [kW]	5.75	6.17
COP	1.22	1.32
Current [A]	11.8	13.16
Mass Flow [g/s]		61.53

	+5°C/40°C	
R12/R134a		
Capacity [kW]	27.34	28.55
Power Input [kW]	7.41	8.3
COP	3.69	3.44
Current [A]	19.6	15.65
Mass Flow [g/s]		185.88

	D9RC 1000	D3SC 1000/X
R502 / R404A	-20°C ... 12.5°C	-25°C ... 12.5°C
Swept volume m3/h	37.9	Same
Mountings	381 X 305	Same
Length	690	655
Width	335	370
Height	480	Same
Disch. Valve Position H/L		Same
Suction Valve Ø	1 3/8"	Same
Disch. Valve Position H/L		+10 / +50
Disch. Valve Ø	1 1/8"	Same

	-25°C/40°C	
R502 / R404A		
Capacity [kW]	8.86	10.51
Power Input [kW]	5.8	6.09
COP	1.53	1.72
Current [A]	25.1	12.2
Mass Flow [g/s]		80.16

	-10°C/45°C	
R22		
Capacity [kW]	16.55	17.35
Power Input [kW]	7.13	7.83
COP	2.32	2.22
Current [A]	13.63	14.38
Mass Flow [g/s]	99.59	104.39

	D9RS 1500	D3SS 1500/X
R502 / R404A	-20°C ... 12.5°C	-25°C ... 12.5°C
Swept volume m3/h	49.9	Same
Mountings	381 X 305	Same
Length	730	680
Width	335	370
Height	480	Same
Suction Valve Position		Same
Suction Valve Ø	1 5/8"	Same
Disch. Valve Position H/L		+10 / +50
Disch. Valve Ø	1 1/8"	Same

	-25°C/40°C	
R502 / R404A		
Capacity [kW]	12.37	14.67
Power Input [kW]	7.23	8.73
COP	1.71	1.68
Current [A]	31.4	16.55
Mass Flow [g/s]		111.88

	-10°C/45°C	
R22		
Capacity [kW]	22.32	23.96
Power Input [kW]	9.39	10.82
COP	2.38	2.21
Current [A]	18.3	19.64
Mass Flow [g/s]	134.28	144.15

5 Motor version


All DWM Copeland™ three-phase compressors can be started Direct-On-Line (DOL). The position of bridges for Direct-On-Line start depending on type of motor and/or mains voltage are shown in the wiring diagrams.

Each compressor terminal box contains wiring diagrams. Always ensure the supply voltage, the phases and frequency match the nameplate prior to connecting the compressor to the system power supply.


Motor Type		Motor Protection	Motor Voltages			
			V	Ph	Hz	
E	Three-phase motor, interchangeable for Y or Δ operation. Can be used D.O.L.	W	L	220-240/380-420	3	50
			M	380-420	3	50
			R	220-240	3	50
Y	500-550		3	50		
D	440-480		3	60		
C	208-230		3	60		
K	220-240/380-420	3	60			
X	380-420	3	60			
A	Three-phase part-winding or D.O.L. start motor, not interchangeable. For part-winding start the winding is divided 2/3 – 1/3.					
T	Three-phase motor, one voltage D.O.L. only, connections only to terminals U, V, W					

6 Drawings

6.1 D9RA 500, D9RC 750, D9RS 1000

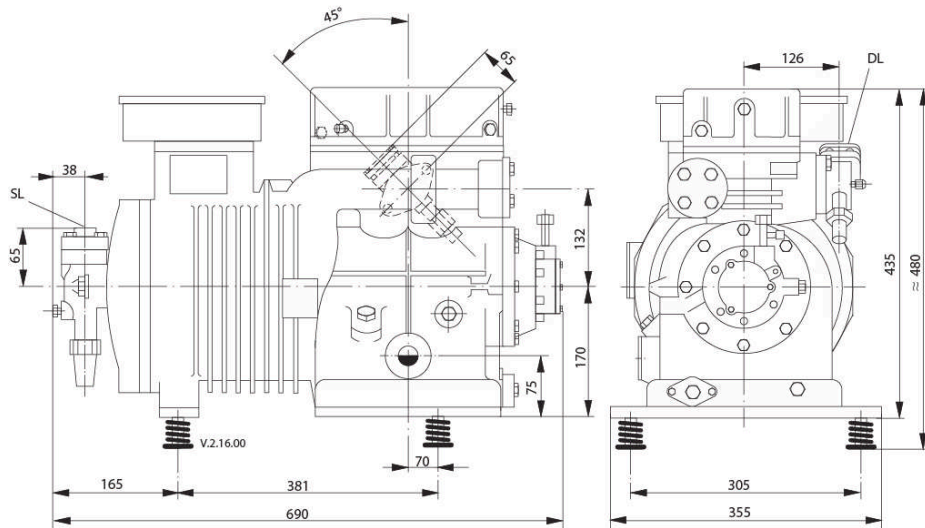

6.2 D9RA 750, D9RC 1000, D9RS 1500

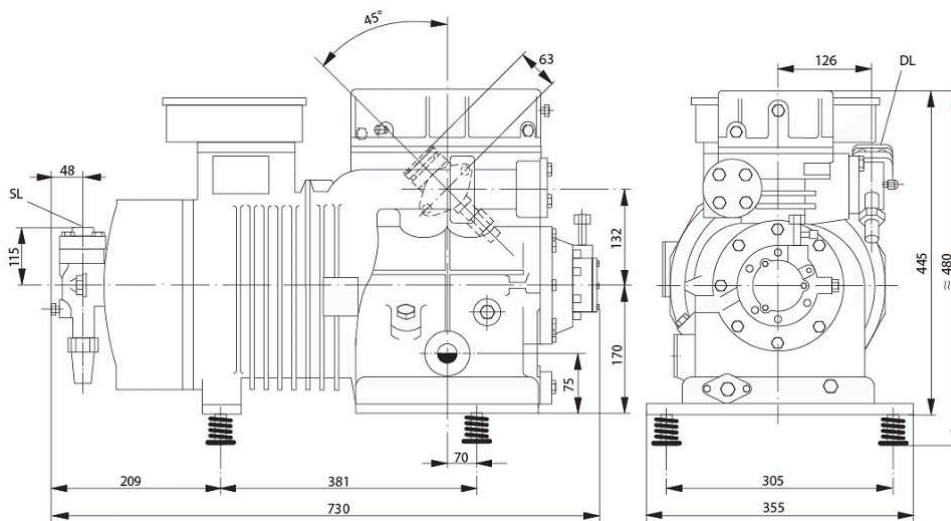

7 Data sheets

7.1 D9RA 750 vs D3SA 750

Power Supply 380/420V - 3~ - 50Hz
 Suction Superheat 10.0K
 Liquid subcooling 0.0K

R22 - D9RA 750

	Cond. Temp.	Evaporating temperature									
		-25	-20	-15	-10	-5	0	5	7	10	12.5
Capacity kW	30	8.27	10.88	13.92	17.43	21.47	26.1	31.38	33.7	37.4	40.7
	35		10	12.94	16.35	20.26	24.75	29.88	32.12	35.7	38.9
	40		9.07	11.92	15.22	19.02	23.36	28.32	30.49	34	37.1
	45		8.1	10.86	14.05	17.72	21.92	26.71	28.81	32.2	35.2
	50			9.76	12.83	16.37	20.42	25.05	27.07	30.3	33.2
	55			8.61	11.57	14.97	18.87	23.32	25.27		
	60				10.26	13.53	17.27				

	Cond. Temp.	Evaporating temperature									
		-25	-20	-15	-10	-5	0	5	7	10	12.5
Power Input kW	30	3.75	4.2	4.61	4.96	5.24	5.43	5.52	5.52	5.48	5.41
	35		4.39	4.88	5.31	5.68	5.97	6.16	6.21	6.24	6.24
	40		4.53	5.11	5.63	6.09	6.48	6.78	6.87	6.98	7.03
	45		4.63	5.29	5.91	6.47	6.96	7.37	7.51	7.68	7.79
	50			5.42	6.14	6.8	7.4	7.92	8.1	8.35	8.52
	55			5.5	6.32	7.09	7.79	8.43	8.66		
	60				6.43	7.31	8.13				

R22 - D3SA 750

	Cond. Temp.	Evaporating temperature									
		-25	-20	-15	-10	-5	0	5	7	10	12.5
Capacity kW	10	11.29	14.5	18.33	22.82	28.04					
	15	10.44	13.51	17.17	21.48	26.5	32.28				
	20	9.61	12.54	16.03	20.16	24.96	30.51	36.87	39.64		
	25	8.8	11.59	14.92	18.86	23.45	28.77	34.86	37.53	41.8	45.6
	30	8.03	10.67	13.84	17.58	21.96	27.04	32.88	35.44	39.5	43.2
	35	7.3	9.79	12.78	16.33	20.5	25.34	30.91	33.36	37.3	40.8
	40	6.6	8.94	11.76	15.12	19.06	23.66	28.98	31.31	35.1	38.4
	45		8.14	10.78	13.94	17.67	22.02	27.07	29.3	32.9	36.1
	50		7.38	9.85	12.8	16.31	20.42	25.2	27.31	30.7	33.8
	55			8.96	11.71	14.99	18.86	23.37	25.36	28.6	31.5
	60			8.12	10.67	13.72	17.34	21.58	23.46	26.5	29.2
62				10.27	13.23	16.75	20.87	22.71	25.7	28.3	

	Cond. Temp.	Evaporating temperature									
		-25	-20	-15	-10	-5	0	5	7	10	12.5
Power Input kW	10	3.74	3.9	3.95	3.9	3.72					
	15	3.94	4.16	4.3	4.35	4.27	4.06				
	20	4.11	4.4	4.62	4.76	4.79	4.69	4.46	4.32		
	25	4.25	4.61	4.91	5.14	5.27	5.29	5.19	5.1	4.93	4.75
	30	4.37	4.79	5.17	5.49	5.73	5.86	5.88	5.86	5.77	5.66
	35	4.46	4.96	5.42	5.82	6.16	6.41	6.56	6.58	6.58	6.54
	40	4.54	5.1	5.64	6.13	6.57	6.93	7.2	7.28	7.36	7.4
	45		5.22	5.84	6.42	6.96	7.44	7.83	7.96	8.13	8.23
	50		5.34	6.03	6.7	7.34	7.92	8.44	8.62	8.87	9.05
	55			6.2	6.96	7.7	8.39	9.03	9.27	9.6	9.84
	60			6.37	7.21	8.05	8.85	9.61	9.9	10.3	10.6
62				7.31	8.18	9.03	9.84	10.15	10.6	10.9	

BENELUX

Deltakade 7
NL-5928 PX Venlo
Tel. +31 77 324 02 34
Fax +31 77 324 02 35
benelux.sales@emerson.com

UK & IRELAND

Unit 17, Theale Lakes Business Park
Reading, Berks RG7 4GB
Tel: +44 1189 83 80 00
Fax: +44 1189 83 80 01
uk.sales@emerson.com

BALKAN

Selska cesta 93
HR-10 000 Zagreb
Tel. +385 1 560 38 75
Fax +385 1 560 38 79
balkan.sales@emerson.com

GERMANY, AUSTRIA & SWITZERLAND

Senefelder Str. 3
DE-63477 Maintal
Tel. +49 6109 605 90
Fax +49 6109 60 59 40
ECTGermany.sales@emerson.com

SWEDEN, DENMARK, NORWAY & FINLAND

Pascalstr. 65
DE-52076 Aachen
Tel. +49 2408 929 0
Fax +49 2408 92 95 28
nordic.sales@emerson.com

UKRAINE

Turgenevskaya Str. 15, office 33
UA-01054, Kiev
Tel. +38 - 44 - 4 92 99 24
Fax. +38 - 44 - 4 92 99 28
Andrey.Gladchenko@emerson.com

FRANCE, GREECE & MAGHREB

8, Allée du Moulin Berger
FR-69130 Ecully Cédex
Tel. +33 4 78 66 85 70
Fax +33 4 78 66 85 71
mediterranean.sales@emerson.com

EASTERN EUROPE & TURKEY

Pascalstr. 65
DE-52076 Aachen
Tel. +49 2408 929 0
Fax +49 2408 929 525
easterneurope.sales@emerson.com

ROMANIA

Tel. +40 - 364 - 73 11 72
Fax. +40 - 364 - 73 12 98
Camelia.Tiru@emerson.com

ITALY

Via Ramazzotti, 26
IT-21047 Saronno (VA)
Tel. +39 02 96 17 81
Fax +39 02 96 17 88 88
italy.sales@emerson.com

POLAND

Szturmowa 2
PL-02678 Warsaw
Tel. +48 22 458 92 05
Fax +48 22 458 92 55
poland.sales@emerson.com

MIDDLE EAST & AFRICA

PO Box 26382
Jebel Ali Free Zone - South, Dubai - UAE
Tel. +971 4 811 81 00
Fax +971 4 886 54 65
mea.sales@emerson.com

SPAIN & PORTUGAL

C/ LLull, 321 (Edifici CINC)
ES-08019 Barcelona
Tel. +34 93 412 37 52
Fax +34 93 412 42 15
iberica.sales@emerson.com

RUSSIA & CIS

Letnikovskaya 10, Bld. 2, floor 5
RU-115114 Moscow
Tel. +7 495 981 98 11
Fax +7 495 981 98 16
ECT.Holod@emerson.com

For more details, see www.emersonclimate.eu

Emerson Climate Technologies - European Headquarters - Pascalstrasse 65 - 52076 Aachen, Germany
Phone: +49 (0) 2408 929 0 - Fax: +49 (0) 2408 929 570 - Internet: www.emersonclimate.eu

The Emerson Climate Technologies logo is a trademark and service mark of Emerson Electric Co. Emerson Climate Technologies Inc. is a subsidiary of Emerson Electric Co. Copeland is a registered trademark and Copeland Scroll is a trademark of Emerson Climate Technologies Inc.. All other trademarks are property of their respective owners. Information contained in this brochure is subject to change without notification.

© 2011 Emerson Climate Technologies, Inc.

