



## Dual discharge air coolers TYR-D

**Standard coolers with Stainless Steel tubing**



**HELPMAN**



# Dual discharge air coolers


# TYR-D



## Contents

	page
Model indication .....	2
Eurovent .....	2
Capacities .....	2
General information.....	3
Standard product configuration .....	3
Non standard executions.....	4
Correction factors & Selection example .....	5
Capacities & technical data.....	6
Fans .....	8
Defrost systems.....	9
Dimensions .....	10

## Model indication

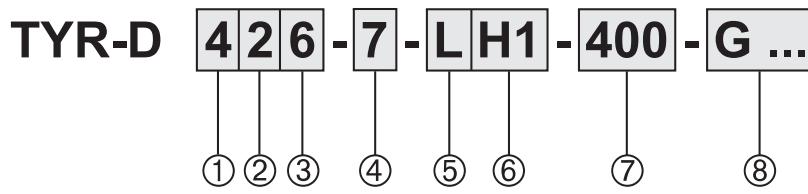

Pos.	Reference	
1	Cooler module	2, 4 and 6
2	Number of fans	1 - 5
3	Tube rows	4, 6 or 8 tube rows in air direction
4	Fin spacing	4, and 7 mm
5	Fan speed	L = low (1000 rpm) H = high (1500 rpm)
6	Circuiting design	H1, H2 ...
7	Current	400 = 230/400/50/3 230 = 230/50/1
8	Options	For a full survey of all available options see page 4

## Eurovent

Within Europe, a wide variety of published data on capacities are in use, generally depending on national standards. Most in use by the leading manufacturers are national and international standards like DIN, ENV, NEN-EN and ASHRAE. Due to this, customers have not been able to make objective product comparisons, since data published on capacities were based on DT<sub>1</sub>, DTM, dry or wet conditions, with or without certification, etc.



To meet the European requirements on EN standards, the European Refrigeration Industry embodied by Eurovent has set standards to guarantee an independent certification procedure for forced convection air cooled condensers based on NEN-EN 327 and unit air coolers based on NEN-EN 328. Being an active member of Eurovent, the capacities of the Alfa Laval commercial cooler programme, as given in the technical documentation, are based on NEN-EN 328 (*evaporating temperature t<sub>0</sub> = - 8 °C, 8 K temperature difference between air-on temperature and evaporating temperature (DT<sub>1</sub>)*).

In order to enable air cooler selection for operating conditions, technical documentation should also give capacities for humid/frosted conditions. According to Eurovent these 'frosted conditions' are to be calculated by multiplying 'dry capacities' with a factor 1.15. These data can be found in the capacity tables, in the columns marked "frosted".

## Capacities

### Frosted conditions

- Lightly frosted coil.
- Relative humidity 85 %.
- Suction gas superheating 62% of the temperature difference (DT<sub>1</sub>), with a minimum of 3.5 K.
- Refrigerant liquid temperature 30 °C (for t<sub>0</sub> = - 20 °C and below; liquid temperature 10 °C).

### Evaporating temperature t<sub>0</sub>


Evaporating temperature t<sub>0</sub> is the saturated temperature according to the pressure at the suction outlet of the cooler.

### Dry conditions

Cooling capacity where no condensation or ice build-up occurs on the coil (100% sensible cooling). This condition is used by Eurovent to standardise capacity ratings but should not be used when selecting coolers. For cooler selection use the columns marked "frosted".

## Dual discharge air coolers

## TYR-D

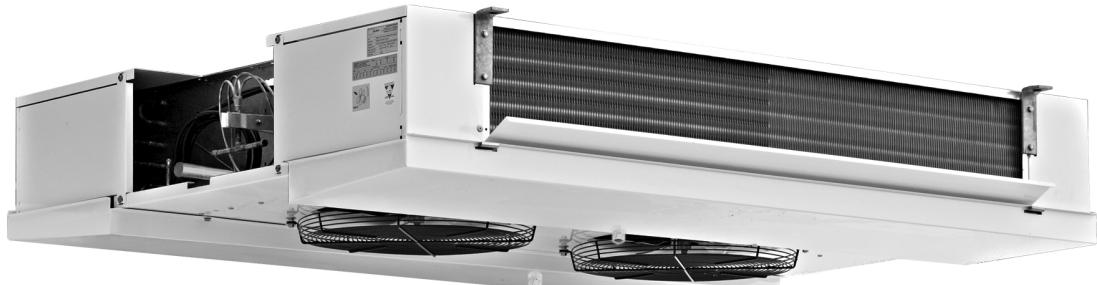

### General Information

Dual discharge air coolers TYR-D are a further extension to the already wide and flexible TYR range of industrial air coolers. TYR-D dual discharge coolers are characterized by a low silhouette.

**Application area:** evaporating temperatures of +5 down to -40 °C using either ammonia (R-717), halogen refrigerants, CO<sub>2</sub>, or secondary refrigerants.

**Capacities (Eurovent SC 2)** 4,5 up to 123 kW.

Air flow 3,000 up to 60,000 m<sup>3</sup>/h.



### Other TYR models

#### TYR

The TYR series is a wide and flexible range of industrial air coolers fitted with blow-through or draw-through fans. These models have been highly standardised in construction and dimensions, while maintaining flexibility in fin spacings, coil construction and circuiting design.



#### TYR-A

For airsock application Alfa Laval has developed a special airsock cooler range. These TYR-A models are fitted with an airsock ring and fan motors capable of supplying the extra external pressure that is required for the proper functioning of airsocks.



#### TYR-F

Air cooler models TYR-F have been optimized for the refrigerated storage of agricultural products. These cooler models are characterised by an optimised capacity / air volume ratio and a relatively low profile.

All TYR, TYR-D, TYR-F and TYR-A models are also available with copper tubing (THOR range).

### Two-Year Guarantee

Because Alfa Laval has the fullest confidence in the product quality, a two-year full guarantee is given.

### Product Configuration

#### ■ Finned coil

- 3 coil block modules
- 4, 6 or 8 tube rows deep
- Stainless steel tubing ø 16 mm
- Tube pitch 50 x 50 mm square
- Corrugated Alu-fins
- Fin spacings 4, and 7 mm.

#### ■ 1-5 Fans, blowing through the coil, available in a range of different executions. Diameters Ø 457, Ø 508 and Ø 560 mm.

Motor cables are led to the outside of the cooler casing. Fan motors protection class IP55.

- 1000 rpm = L design
- 1500 rpm = H design

#### ■ Corrosion resistant casing material:

Aluminium/Sendzimir, white epoxy coated (RAL 9003).

#### ■ Hinged, enclosed endcovers.

#### ■ Hinged drip tray with vertical drains 1¼" BSP male.

#### ■ Refrigerant distribution optimised to refrigerant applied.

#### ■ Fitted with schrader valve on the suction connection for testing purposes (not for R-717).

#### ■ Sufficient room for fitting the expansion valve inside.

#### ■ Suitable for dry expansion or pumped system. DX-coolers for halogen refrigerants are fitted with Cu-distributor.

#### ■ Stickers indicate fan direction and refrigerant in/out.

#### ■ Delivery in mounting position. Coolers are mounted on wooden beams. Installation can take place with use of a forklift.

#### ■ Design pressure 33 bar (H(C)FC), 27 bar (ammonia) or 6 bar (brine). Higher design pressures on request. Each heat exchanger is leak tested with dry air and finally supplied with a nitrogen pre-charge.

## Dual discharge air coolers

## TYR-D



### Options

#### ■ Defrost systems

- Hot gas coil in driptray
  - Electric defrost
  - Hot glycol defrost
- Electric defrost for air coolers with pumped refrigerant circulation or in glycol execution on special request only.*

G1  
E1, E4  
HW1, HW2

#### ■ Fan ring heater

FRH

#### ■ Driptray insulation

- Styropore 10 mm + cladding *not in combination with electric defrost*
- Foamglass 25 mm + cladding

I2

I3

#### ■ Isolating switch (mounted)

ISM

#### ■ Horizontal drain

Hinged driptray with horizontal drain at the short side.  
Available for TYR-D up to 3 fans, but not in combination with driptray insulation I2.

#### ■ Dual fan speed motors (Dahlander 1500/750)

*Only available for modules 2 and 4.*

For this fan motor all table values for cooling capacity and air volume need to be adjusted according to the following percentages:

Capacity	Module 2	Module 4
n = 1500 rpm	100 %	90 %
n = 750 rpm	60 %	50 %
Air flow	Module 2	Module 4
n = 1500 rpm	100 %	80 %
n = 750 rpm	50 %	40 %

#### ■ Secondary refrigerant

Air coolers for secondary refrigerant application can be selected with our selection software.

*Extra information on request.*

#### ■ Stainless steel 304 casing

SSC

#### ■ Fan motors 400/60/3 or 230/60/1

### Non-standard executions *(on request only)*

#### ■ Higher capacities

#### ■ Special fan motors:

- Dual fan speed motors
- Variable fan speed motors
- EC fans
- Alternative electrical supply 460/60/3

#### ■ Built in heater coil sections

### Fan Ring Heater (FRH, 230 Volt)

#### incl. mounting gear

Cooler module	Fan diameter mm	Ring heater power W
2	457	450
4	508	500
6	560	500

#### Driptray Insulation (I)

For specific operational conditions the air coolers can be fitted with driptray insulation.

Insulation of the driptray is recommended for air coolers with hot gas defrosting used at a room temperature below -5 °C. For areas with high relative humidity it may also be necessary to insulate other parts of the casing.

At extra cost this driptray insulation can be combined with the usual epoxy coating.

*Note : When selecting driptray insulation the overall height "B" of the coolers (see page 10) increases by the thickness of the insulation material applied.*

## Dual discharge air coolers

## TYR-D

Selection Example DT<sub>1</sub>

Refrigerant .....	R-404A dx
Selected fin spacing .....	7 mm
Fan speed H.....	1500 rpm
Required cooling capacity.....	30 kW
Air-on temperature .....	+2 °C
Evaporating temperature .....	-5 °C

$$1) \text{ DT}_1 = +2 - (-5) = 7 \text{ K}$$

$$2) \text{ Correction factor DT}_1 / \text{R-404A} : 1.15$$

3) Multiply required capacity  
with correction factor :  $30 \times 1.15 = 34.5 \text{ kW}$ .

4) Cooler models can be selected in columns 'capacity / frosted' with a nominal capacity of 34.5 kW.

For the above mentioned conditions the following models can be selected :

- TYR-D 248-7-H, nom. cap. 36.1 kW.
- TYR-D 256-7-H, nom. cap. 36.9 kW.
- TYR-D 436-7-H, nom. cap. 36.9 kW.
- TYR-D 444-7-H, nom. cap. 35.7 kW.
- TYR-D 626-7-H, nom. cap. 38.4 kW.

Depending on parameters such as *air flow, number of fans and dimensions* (see tables) a final cooler model selection can take place.

Capacity values under 'dry conditions' are reference values for Eurovent conditions.

Standard condition SC	Air on temp. °C	Evaporating temperature °C	Factor dry/ frosted
SC1	10	0	1.35
SC2	0	-8	1.15
SC3	-18	-25	1.05
SC4	-25	-31	1.01

SC 2 : Nominal capacity for cooling design.

Air-on temperature is the air temperature at the intake side of the coil block.

## Correction factors

DT1 K	Evaporating temperature °C									
	+5	0	-5	-8	-10	-15	-20	-25	-30	-35
<b>R-404A dx</b>										
6	1.28	1.32	1.38		1.44	1.51	1.58	1.64	1.69	1.72
7	1.06	1.10	1.15		1.20	1.27	1.33	1.39	1.44	1.48
8	0.89	0.93	0.97	1.00	1.03	1.09	1.15	1.21	1.26	1.29
9	0.77	0.80	0.84		0.89	0.95	1.00	1.06	1.11	1.15
10	0.67	0.70	0.74		0.78	0.83	0.89	0.95	1.00	1.04
11	0.59	0.62	0.65		0.70	0.74	0.80	0.85	0.90	0.94
<b>R-134a dx</b>										
6	1.34	1.42	1.50		1.60	1.71	1.82	1.94		
7	1.11	1.17	1.25		1.34	1.43	1.54	1.64		
8	0.94	0.99	1.06		1.14	1.23	1.32	1.42		
9	0.81	0.86	0.92		0.99	1.07	1.16	1.25		
10	0.70	0.75	0.80		0.87	0.94	1.03	1.11		
11	0.62	0.66	0.71		0.77	0.84	0.92	1.00		
<b>R-22 dx</b>										
6	1.34	1.39	1.45		1.52	1.59	1.66	1.73	1.78	1.81
7	1.11	1.15	1.21		1.27	1.33	1.40	1.47	1.52	1.55
8	0.94	0.98	1.03		1.08	1.14	1.21	1.27	1.32	1.36
9	0.81	0.84	0.89		0.94	1.00	1.06	1.12	1.17	1.21
10	0.70	0.74	0.78		0.82	0.88	0.94	1.00	1.05	1.09
11	0.62	0.65	0.69		0.73	0.78	0.84	0.90	0.95	0.99
<b>R-404A pumped system</b>										
6	1.00	1.07	1.13		1.19	1.24	1.29	1.34	1.39	1.44
7	0.82	0.88	0.94		1.00	1.05	1.10	1.15	1.20	1.25
8	0.70	0.75	0.80		0.85	0.90	0.95	1.00	1.05	1.11
9	0.60	0.65	0.69		0.74	0.79	0.84	0.89	0.94	1.00
10	0.52	0.56	0.61		0.65	0.70	0.75	0.80	0.85	0.91
11	0.46	0.50	0.54		0.58	0.62	0.67	0.72	0.78	0.84
<b>R-22 pumped system</b>										
6	1.13	1.21	1.28		1.34	1.39	1.44	1.48	1.53	1.58
7	0.92	0.98	1.05		1.10	1.16	1.21	1.25	1.30	1.36
8	0.76	0.82	0.88		0.93	0.98	1.03	1.08	1.14	1.20
9	0.64	0.70	0.75		0.80	0.85	0.90	0.95	1.01	1.07
10	0.55	0.60	0.65		0.70	0.74	0.79	0.84	0.90	0.97
11	0.48	0.52	0.57		0.61	0.66	0.71	0.76	0.82	0.89
<b>R-717 pumped system (ammonia)</b>										
6	0.96	1.03	1.09	1.12	1.14	1.19	1.22	1.24	1.26	1.26
7	0.79	0.84	0.90	0.93	0.95	0.99	1.02	1.05	1.06	1.07
8	0.66	0.71	0.76	0.78	0.80	0.84	0.87	0.90	0.92	0.93
9	0.56	0.61	0.65	0.67	0.69	0.73	0.76	0.78	0.80	0.82
10	0.49	0.53	0.57	0.59	0.60	0.64	0.67	0.69	0.71	0.73
11	0.43	0.46	0.50	0.52	0.53	0.56	0.59	0.62	0.64	0.66

Correction factors for other refrigerants, alternative fin materials, coatings and optional coil block configurations on request.

## Dual discharge air coolers

## TYR-D

## Technical data

Cooler model	Capacities R-404A (kW)						Dimensions		Fans			
	Frosted $t_0 = -8^\circ\text{C}$ $DT_f = 8K$	Dry $t_0 = -8^\circ\text{C}$ $DT_f = 8K$	Air flow $\text{m}^3/\text{h}$	Coil surface $\text{m}^2$	Int. vol. $\text{dm}^3$	Weight kg	Length A mm	Height B mm	Cap. kW	Nr.	Air throw (m)	Sound press. dB(A)
	<b>Execution H (n = 1500 rpm), fin spacing 7 mm</b>											
414 - 7 - H	8.9	7.8	8470	45.1	16	120	1450	485	0.55	1	18	62
416 - 7 - H	12.3	10.7	8400	67.6	23	135	1450	485	0.55	1	18	62
418 - 7 - H	15.1	13.1	8000	90.1	31	155	1450	485	0.55	1	18	62
424 - 7 - H	17.8	15.5	16930	90.1	30	190	2450	485	0.55	2	18	65
426 - 7 - H	24.6	21.4	16800	135.2	44	225	2450	485	0.55	2	18	65
428 - 7 - H	30.1	26.2	16000	180.3	59	265	2450	485	0.55	2	18	65
434 - 7 - H	26.8	23.3	25400	135.2	44	270	3450	485	0.55	3	18	67
436 - 7 - H	36.9	32.1	25200	202.8	65	325	3450	485	0.55	3	18	67
438 - 7 - H	45.2	39.3	24000	270.4	87	375	3450	485	0.55	3	18	67
444 - 7 - H	35.7	31.0	33870	180.3	57	345	4450	485	0.55	4	18	68
446 - 7 - H	49.2	42.8	33600	270.4	86	415	4450	485	0.55	4	18	68
448 - 7 - H	60.2	52.4	32000	360.5	114	485	4450	485	0.55	4	18	68
454 - 7 - H	44.6	38.8	42340	225.3	71	425	5450	485	0.55	5	18	69
456 - 7 - H	61.5	53.5	42000	338.0	107	510	5450	485	0.55	5	18	69
458 - 7 - H	75.3	65.4	40000	450.7	142	600	5450	485	0.55	5	18	69
614 - 7 - H	13.7	11.9	12800	67.6	24	175	1650	585	1.50	1	20	65
616 - 7 - H	19.0	16.5	12400	101.4	41	204	1650	585	1.50	1	20	65
618 - 7 - H	23.3	20.3	12000	135.2	54	234	1650	585	1.50	1	20	65
624 - 7 - H	29.0	25.2	25600	135.2	44	297	2850	585	1.50	2	20	68
626 - 7 - H	38.4	33.4	24800	202.8	70	368	2850	585	1.50	2	20	68
628 - 7 - H	47.1	41.0	24000	270.4	93	442	2850	585	1.50	2	20	68
634 - 7 - H	43.3	37.7	38400	202.8	65	430	4050	585	1.50	3	20	70
636 - 7 - H	58.3	50.7	37200	304.2	98	535	4050	585	1.50	3	20	70
638 - 7 - H	67.9	59.1	36000	405.6	131	640	4050	585	1.50	3	20	70
644 - 7 - H	58.9	51.2	51200	270.4	87	563	5250	585	1.50	4	20	71
646 - 7 - H	74.3	64.6	49600	405.6	127	700	5250	585	1.50	4	20	71
648 - 7 - H	95.1	82.7	48000	540.8	170	840	5250	585	1.50	4	20	71
654 - 7 - H	71.7	62.4	64000	338.0	108	695	6450	585	1.50	5	20	72
656 - 7 - H	98.3	85.5	62000	507.0	156	867	6450	585	1.50	5	20	72
658 - 7 - H	117.1	101.9	60000	676.0	208	973	6450	585	1.50	5	20	72
<b>Execution L (n = 1000 rpm), fin spacing 4 mm</b>												
214 - 4 - L	5.6	4.8	3050	46.0	10	95	1250	385	0.25	1	8	52
216 - 4 - L	7.2	6.2	2950	68.9	15	110	1250	385	0.25	1	8	52
224 - 4 - L	11.1	9.7	6100	91.9	18	155	2050	385	0.25	2	8	55
226 - 4 - L	14.3	12.5	5900	137.9	27	185	2050	385	0.25	2	8	55
234 - 4 - L	16.7	14.5	9150	137.9	27	220	2850	385	0.25	3	8	57
236 - 4 - L	21.5	18.7	8850	206.8	40	265	2850	385	0.25	3	8	57
244 - 4 - L	22.2	19.3	12200	183.9	35	280	3650	385	0.25	4	8	58
246 - 4 - L	28.7	24.9	11800	275.8	52	340	3650	385	0.25	4	8	58
254 - 4 - L	27.8	24.2	15250	229.8	43	340	4450	385	0.25	5	8	59
256 - 4 - L	35.9	31.2	14750	344.7	65	420	4450	385	0.25	5	8	59
414 - 4 - L	9.3	8.1	5150	76.6	16	135	1450	485	0.25	1	12	54
416 - 4 - L	12.0	10.4	4950	114.9	23	160	1450	485	0.25	1	12	54
424 - 4 - L	18.5	16.1	10300	153.2	30	220	2450	485	0.25	2	12	57
426 - 4 - L	23.9	20.8	9900	229.8	44	275	2450	485	0.25	2	12	57
434 - 4 - L	27.8	24.2	15450	229.8	44	315	3450	485	0.25	3	12	59
436 - 4 - L	35.9	31.2	14850	344.7	65	390	3450	485	0.25	3	12	59
444 - 4 - L	37.1	32.2	20600	306.4	57	405	4450	485	0.25	4	12	60
446 - 4 - L	47.8	41.6	19800	459.6	86	510	4450	485	0.25	4	12	60
454 - 4 - L	46.3	40.3	25750	383.0	71	500	5450	485	0.25	5	12	61
456 - 4 - L	59.8	52.0	24750	574.6	107	625	5450	485	0.25	5	12	61

Changes possible without prior notice

## Dual discharge air coolers

## TYR-D



### Fans

In view of its flexible construction, in principle TYR can be supplied with any desired fan. Depending on the application there is a standard series of fans which match TYR perfectly. These fans can be supplied in both blow-through and draw-through versions.

### Execution

Fans are executed with balanced aluminium or polyamide fan blades, fitted with robust electrolytically galvanized and epoxy coated fan guards according to DIN 31001. Fans are mounted in vibration dampers.

Enclosed design spray-tight motors, protection class IP-55. Motor cables are lead to the outside of the cooler casing.

All motors, with the exception of the 0.18 kW, 230/50/1 motor, are equipped with a thermal safety device built in the windings, connected to separate terminals in the box. This safety device can therefore be integrated into the control circuit. The electrical control should be arranged preferably with a manual reset device in order to prevent continuous on/off switching (tripping) of the motors. Cable inlet ranges from 7 up to 12 mm.

### Fans 50 Hz

Fan motor W	Motor voltage* V	Electric capacity		Adj. values overload relays			Cable inlet
		nom. kW	abs. kW***	0 °C	-20 °C	-40 °C	
<b>Execution H, nominal fan speed 1500 rpm</b>							
250	230/400/3	0.25	0.37	1.1	1.1	1.2	2 x M20 x 1.5
220	230/1	0.22	0.37	2.6	2.8	2.9	2 x M20 x 1.5
550	230/400/3	0.55	0.70	1.7	1.8	2.0	2 x M20 x 1.5
550	230/1	0.55	0.70	5.5	6.0	6.2	2 x M20 x 1.5
1500	230/400/3	1.50	1.50	4.3	4.6	4.9	2 x M20 x 1.5
<b>Execution L, nominal fan speed 1000 rpm</b>							
250	230/400/3	0.25	0.25	1.1	1.1	1.2	2 x M20 x 1.5
180	230/1**	0.18	0.35	2.4	2.5	-	2 x M20 x 1.5
450	230/400/3	0.45	0.45	1.9	2.0	2.2	2 x M20 x 1.5
<b>Execution with 2-speed fan motors, n = 1500 / 750 rpm, Dahlander connection</b>							
370/60	400/3	0.37	0.48	1.4	1.6		2 x M20 x 1.5
		0.06	0.20	0.6	0.6		

\* Motor windings 230 Volt.

\*\* These 230/1 motors are suitable for temperatures down to -20 °C and are not provided with a thermal safety device in the windings.

### Air throw

Air throws as given in the tables are for ceiling mounted coolers at t = 20 °C, an unrestrained air flow in the cold room and a minimal air velocity of 0.25 m/s at air throw distance. Air throw values in the tables are single sided values. Please keep in mind that TYR-D coolers are designed for dual air discharge, so cold air is discharged at the given air throw distance to both sides of the cooler.

### Sound pressure dB(A)

Sound pressure as given in the tables are sound pressure levels in dB(A) according to EN 13487 at 5 m distance in free field conditions. Values may deviate depending on situations at site. The table below gives calculated sound pressure corrections at various distances.

Distance m	Correction dB(A)
1	+ 14
2	+ 8
3	+ 4
4	+ 2
5	0
10	- 6
20	-12
50	-20



## Dual discharge air coolers

## TYR-D



Dimensions

Cooler model TYR-D	Dimensions (mm)								
	A	B	C1	C2	C3	C4	C5	D1	D2
21*	1250	385	800					625	
22*	2050	385	1600					1025	
23*	2850	385	2400					1425	
24*	3650	385	1600	1600				1025	1600
25*	4450	385	2400	1600				1425	1600
41*	1450	485	1000					725	
42*	2450	485	2000					1225	
43*	3450	485	2000	1000				975	1500
44*	4450	485	2000	2000				1225	2000
45*	5450	485	2000	1000	2000			1475	2500
61*	1650	585	1200					825	
62*	2850	585	2400					1425	
63*	4050	585	1200	1200	1200			1025	2000
64*	5250	585	1200	2400	1200			1325	2600
65*	6450	585	1200	1200	1200	1200	1200	1475	3500

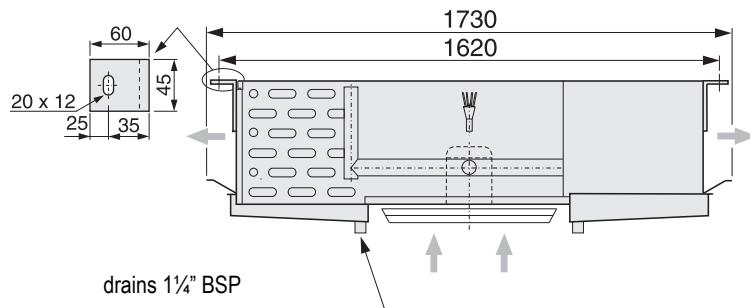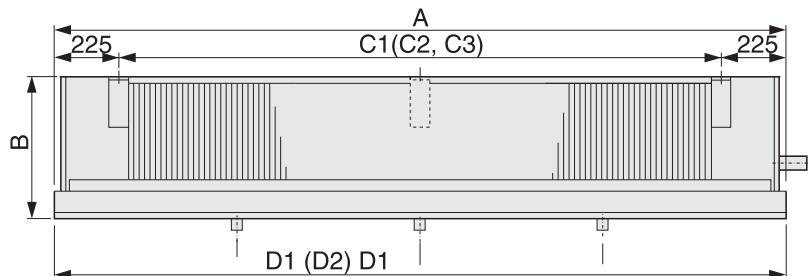

Changes possible without prior notice

## **Alfa Laval in brief**

Alfa Laval is a leading global provider of specialized products and engineered solutions.

Our equipment, systems and services are dedicated to helping customers to optimize the performance of their processes. Time and time again.

We help our customers to heat, cool, separate and transport products such as oil, water, chemicals, beverages, foodstuffs, starch and pharmaceuticals.

Our worldwide organization works closely with customers in almost 100 countries to help them stay ahead.

## **How to contact Alfa Laval**

Up-to-date Alfa Laval contact details for all countries are always available on our website at [www.alfalaval.com](http://www.alfalaval.com)