





Küba Green Line



Küba market plus SP




High Performance Unit Cooler


<p>Q_0</p> <p>1,2  52 kW</p>	<p>+10 °C</p> <p>±0 °C — SPA.D</p> <p>-25 °C — SPB.D</p> <p>t_{l1} </p>		 <p>www.eurovent-certification.com</p>
--	---	--	---



Application Benefits for Contractors and Operators



- ⊗ 250 mm
- ⊗ 300 mm
- ⊗ 400 mm
- ⊗ 500 mm

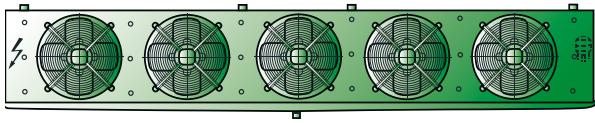


Expanded capacity range

- Up to 52 kW


Closely spaced capacity settings

- Due to five different fan sizes

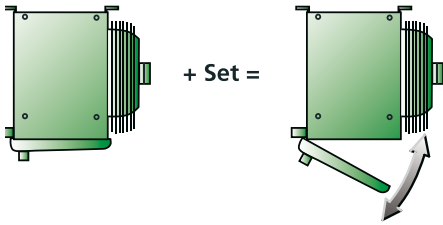

Quick cleaning

- Hinge-down drain tray available as an accessory (can be retrofitted)

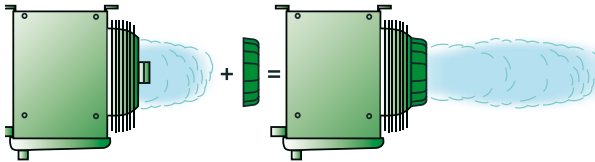


Increased air throw

- Küba Air Jet available as an accessory

Nomenclature

Standard

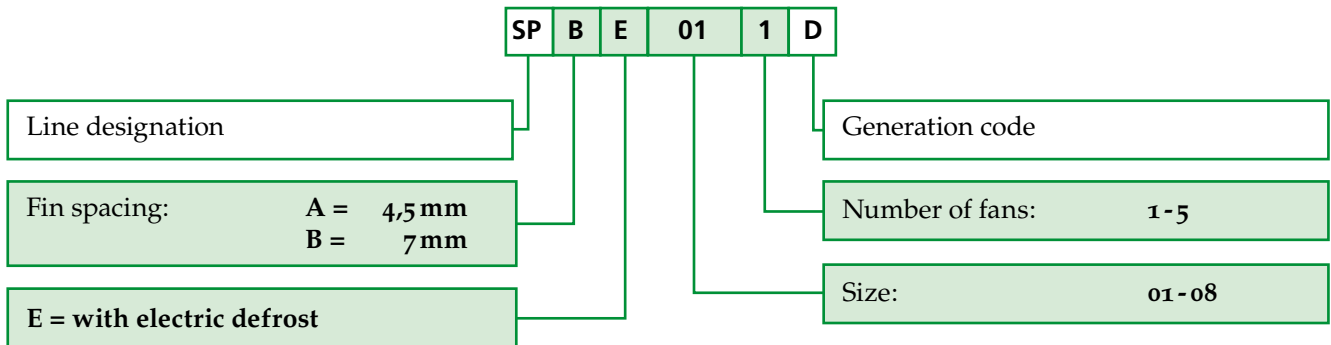



Construction



1. Casing

- Aluminium, smooth
- High-quality powder coating, papyrus white RAL 9018
 - Food-safe
 - Easy to clean
 - Best corrosion protection
- Removable side pieces

2. Heat exchanger

- Internal cleanliness acc. to DIN 8964
- Fin spacing: SPA.D: 4,5 mm, SPB.D: 7,0 mm
- Refrigerant distributor:
 - SPA.D: Flow distributor / SPB.D: Küba-CAL®
- Tubing Cu-Special, Fins Al, End plates Al

3. Fans CE

- Fans are wired to an internal terminal box:
 - Ø 250 mm / Ø 300 mm / Ø 400 mm
- With built-in protector according to VDE provisions (Ø 500 mm: Led-out protector)
- Application range: RT: -30 °C to +50 °C
- Voltage:
 - SP. 011 – 065D = 230 V ±10 %, V-1 50/60 Hz:
 - Ø 250 mm, non-adjustable; Ø 300 mm, adjustable;
 - Ø 400 mm, adjustable
 - SP. 071 – 084D = 400 V ±10 %, V-3 50/60 Hz:
 - Ø 500 mm, adjustable

• Index of protection

- SP. 011 – 024D = IP42
- SP. 031 – 065D = IP44
- SP. 071 – 084D = IP54

• Insulation class

- SP. 011 – 065D = Insulation class B
- SP. 071 – 084D = Insulation class F

- Operating values are the values of the built-in motor at +20 °C, with an unobstructed air flow and a dry surface, as required for the refrigeration load calculation

Motor label data (max. allowable value +40 °C)

	Ø mm	50 Hz			60 Hz		
		min ⁻¹	W	A	min ⁻¹	W	A
SP.01.-02.D	250	1300	90	0,62	1550	80	0,55
SP.03.-04.D	300	1400	65	0,30	1500	90	0,40
SP.05.-06.D	400	1365	214	0,96	1630	270	1,20
SP.07.-08.D	500	1350	565	1,13	1450	830	1,50


4. Electric defroster

- Wired-up, ready to connect in terminal box
- To prevent steam build-up and to accomplish heat exchange with almost no loss, the heaters are located in special expanded tube sleeves
- 230 V-1 / 400 V-3-Y
- With splash pan



Technical data

SPB(E)...D



Model	Rating Q_0 at 50 Hz DT1, R404A	Surface		Air flow	Air throw	Tube volume	Connections		Sound	Fans \odot (Operating values at 50 Hz)					
		$t_{L1} \pm 0^\circ\text{C}$ DT1 = 8K	$t_{L1} -18^\circ\text{C}$ DT1 = 7K	m^2	m^3/h	m	dm^3	Inlet \varnothing mm	Outlet \varnothing mm	L_{WA} dB(A)	Blade St. x \varnothing mm	Type of current 230±10% V-1 50/60Hz	min ⁻¹	Per Fan W	A
SPB 011D	⊕	1,28	1,01	4,6	880	4	1,4	10	12	63	1 x 250	230V-1	1347	85	0,59
SPB 021D	⊕	1,51	1,20	6,0	850	4	1,9	10	12	63	1 x 250	230V-1	1347	85	0,59
SPB 031D	⊕	2,03	1,61	6,9	1450	7	2,1	10	18	70	1 x 300	230V-1	1340	80	0,36
SPB 041D	⊕	2,45	1,94	9,1	1420	6	2,8	12*	22	70	1 x 300	230V-1	1340	80	0,36
SPB 051D	⊕	4,78	3,78	13,7	3320	9	4,2	12*	28	77	1 x 400	230V-1	1365	214	0,96
SPB 061D	⊕	5,93	4,70	20,4	3080	8	6,3	12*	28	77	1 x 400	230V-1	1365	214	0,96
SPB 071D	⊕	8,75	6,92	24,3	6250	18	7,6	15*	35	83	1 x 500	400V-3	1362	560	1,01
SPB 081D	⊕	11,1	8,76	36,3	5880	17	11,1	15*	35	83	1 x 500	400V-3	1362	560	1,01
SPB 022D	⊕⊕	3,03	2,41	12,2	1700	6	3,6	12*	22	66	2 x 250	230V-1	1347	85	0,59
SPB 032D	⊕⊕	4,05	3,21	13,7	2900	9	4,1	12*	28	73	2 x 300	230V-1	1340	80	0,36
SPB 042D	⊕⊕	4,89	3,88	18,2	2840	8	5,5	12*	28	73	2 x 300	230V-1	1340	80	0,36
SPB 052D	⊕⊕	9,49	7,52	27,3	6640	13	8,2	15*	35	80	2 x 400	230V-1	1420	188	0,83
SPB 062D	⊕⊕	11,7	9,31	40,7	6160	12	12,1	15*	35	80	2 x 400	230V-1	1420	188	0,83
SPB 072D	⊕⊕	17,1	13,5	48,6	12500	23	14,3	15*	42	86	2 x 500	400V-3	1362	560	1,01
SPB 082D	⊕⊕	21,9	17,4	72,5	11760	22	21,5	22*	42	86	2 x 500	400V-3	1362	560	1,01
SPB 023D	⊕⊕⊕	4,59	3,63	18,2	2550	8	5,3	12*	28	68	3 x 250	230V-1	1347	85	0,59
SPB 043D	⊕⊕⊕	7,31	5,80	27,3	4260	11	8,0	15*	35	75	3 x 300	230V-1	1340	80	0,36
SPB 053D	⊕⊕⊕	14,4	11,4	41,0	9960	16	12,0	22*	42	82	3 x 400	230V-1	1420	188	0,83
SPB 063D	⊕⊕⊕	17,8	14,1	61,1	9240	14	18,0	22*	42	82	3 x 400	230V-1	1420	188	0,83
SPB 073D	⊕⊕⊕	26,0	20,6	73,0	18750	27	21,3	22*	54	88	3 x 500	400V-3	1362	560	1,01
SPB 083D	⊕⊕⊕	32,6	25,9	108,8	17640	25	32,2	22*	54	88	3 x 500	400V-3	1362	560	1,01
SPB 024D	⊕⊕⊕⊕	6,08	4,82	24,3	3400	9	7,1	12*	28	69	4 x 250	230V-1	1347	85	0,59
SPB 044D	⊕⊕⊕⊕	9,63	7,65	36,5	5680	13	10,6	15*	35	76	4 x 300	230V-1	1340	80	0,36
SPB 064D	⊕⊕⊕⊕	23,5	18,7	81,6	12320	17	23,7	22*	42	83	4 x 400	230V-1	1420	188	0,83
SPB 074D	⊕⊕⊕⊕	34,2	27,1	97,1	25000	30	28,6	22*	54	89	4 x 500	400V-3	1362	560	1,01
SPB 084D	⊕⊕⊕⊕	43,8	34,7	144,8	23520	28	41,0	28*	54	89	4 x 500	400V-3	1362	560	1,01
SPB 065D	⊕⊕⊕⊕⊕	29,7	23,5	101,9	15400	19	28,9	22*	54	84	5 x 400	230V-1	1420	188	0,83


Multiple injections via * KÜBA-CAL® distributor

** For modifications of sound power levels, see page 59

The technical data is also given in the product selection software.

Available for CO₂-DX up to 54 bar

Q_V - diagram (R22, R134A, R404A, R507)

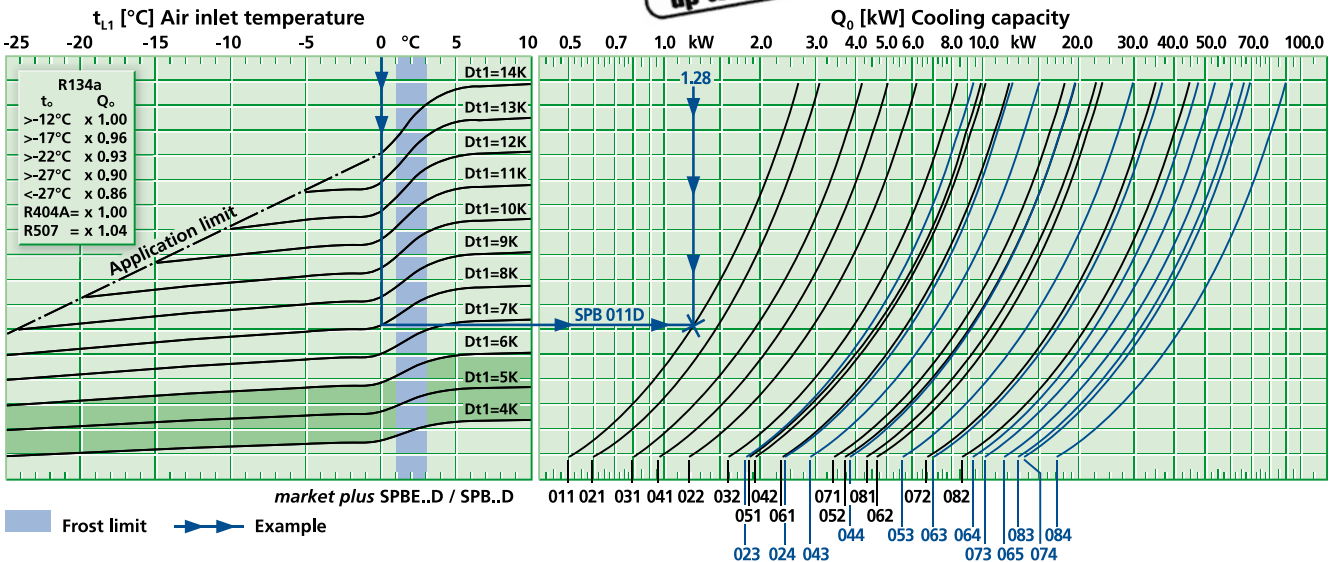




Dimensions, electric defrost, weights


Model	Dimensions [mm]										Electric defrost 230 V-1 / 400 V-3-Y			Weight (net)		Weight (gross)	
	H	B	T	L	E ₁	E ₂	E ₃	F	A	W	Coil	Tray	Total	SPA	SPB	SPA	SPB
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kW	kW	kW	kg	kg	kg	kg
SP. 011D	354	810	424	350	530	-	-	140	92	200	1,07	0,58	1,65	14	13,5	17	16,5
SP. 021D	354	810	424	350	530	-	-	140	92	200	1,07	0,58	1,65	15	14,5	18	17,5
SP. 031D	430	970	421	350	630	-	-	170	90	200	1,23	0,69	1,92	18,5	18	22,5	22
SP. 041D	430	970	421	350	630	-	-	170	90	200	1,23	0,69	1,92	21	20,5	25	24,5
SP. 051D	509	1180	501	420	780	-	-	200	100	300	2,07	0,88	2,95	31,5	30,5	37	36
SP. 061D	509	1180	501	420	780	-	-	200	100	300	2,90	0,88	3,78	36,5	35,5	42	41
SP. 071D	661	1430	592	500	1030	-	-	200	110	400	3,52	0,50	4,02	55	53	75	73
SP. 081D	661	1430	592	500	1030	-	-	200	110	400	5,52	0,50	6,02	65	63	85	83
SP. 022D	354	1310	424	350	1030	-	-	140	92	200	1,84	0,96	2,80	26,5	25,5	30,5	29,5
SP. 032D	430	1570	421	350	1230	-	-	170	90	200	2,14	1,15	3,29	33,5	32,5	51	50
SP. 042D	430	1570	421	350	1230	-	-	170	90	200	2,14	1,15	3,29	36,5	35,5	54	53
SP. 052D	509	1930	501	420	1530	-	-	200	100	300	3,90	1,44	5,34	56	54	76	74
SP. 062D	509	1930	501	420	1530	-	-	200	100	300	5,20	1,44	6,64	65	63	85	83
SP. 072D	661	2430	592	500	2030	-	-	200	110	400	6,74	0,86	7,60	96,5	93,5	180,5	177,5
SP. 082D	661	2430	592	500	2030	-	-	200	110	400	10,11	0,86	10,97	117	114	201	198
SP. 023D	354	1810	424	350	1530	-	-	140	92	200	2,60	1,30	3,90	37,5	36	56,5	55
SP. 043D	430	2170	421	350	1830	-	-	170	90	200	3,18	1,59	4,77	51,5	50	72	70,5
SP. 053D	509	2680	501	420	2280	750	-	200	100	300	5,63	1,95	7,58	78,5	77	137,5	136
SP. 063D	509	2680	501	420	2280	750	-	200	100	300	7,50	1,95	9,45	96	93	155	152
SP. 073D	661	3430	592	500	3030	1000	-	200	110	400	9,20	1,82	11,02	139,5	135,5	244,5	240,5
SP. 083D	661	3430	592	500	3030	1000	-	200	110	400	13,80	1,82	15,62	168,5	164,5	273,5	269,5
SP. 024D	354	2310	424	350	2030	1000	-	140	92	200	3,37	1,72	5,09	48,5	46,5	73	71
SP. 044D	430	2770	421	350	2430	1200	-	170	90	200	4,00	2,00	6,00	67	65	127	125
SP. 064D	509	3430	501	420	3030	1500	-	200	100	300	9,20	1,82	11,02	125	121	229	225
SP. 074D	661	4430	592	500	4030	2000	-	200	110	400	12,72	2,39	15,11	183	178	293	288
SP. 084D	661	4430	592	500	4030	2000	-	200	110	400	19,08	2,39	21,47	221	216	331	326
SP. 065D	509	4180	501	420	3780	1500	2250	200	100	300	11,92	2,24	14,16	156,5	150,5	252,5	246,5




Dimensional drawings

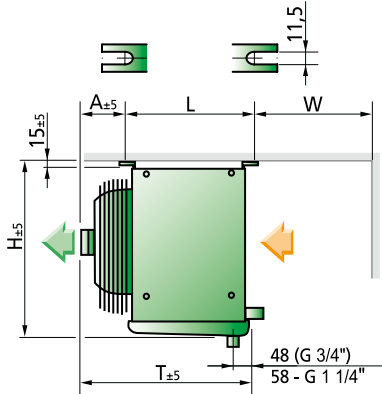


SP.(E) 011, 021, 031, 041, 051, 061, 071, 081 D




SP.(E) 022, 032, 042, 052, 062, 072, 082 D

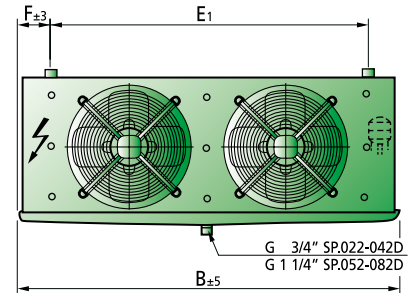


SP.(E) 023, 043, 053, 063, 073, 083 D

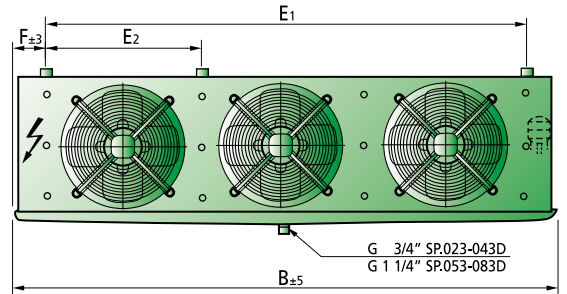

SP.(E) 024, 044, 064, 074, 084 D

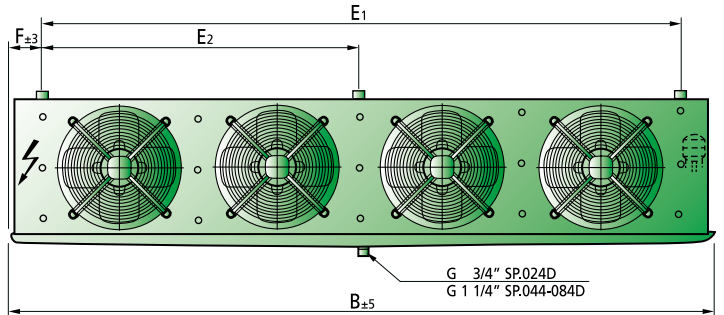

SP.(E) 065 D

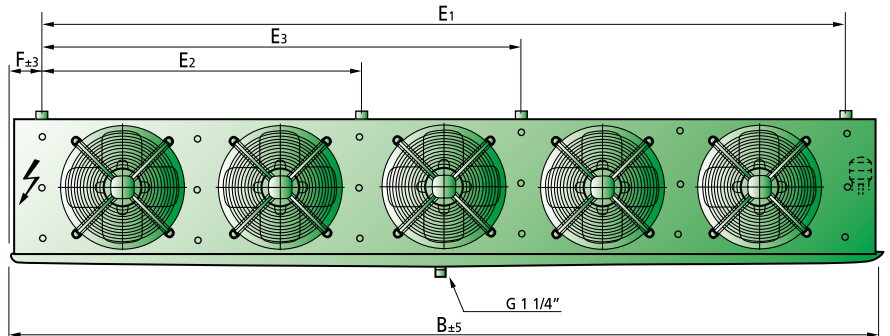



Constructions, Variants and Accessories

Water/brine operation

Please use our Küba selection software for configuring the brine Air Coolers. Do not hesitate to contact us if you have any further questions.

Configuration

- Soldered connections
- Ventilation and drainage

Küba Air Jet

Advantages

- Longer air throw
- Even temperature distribution in the cold room



Loose as accessory



After assembly

Information:

Unassembled upon delivery
(Cannot be used in conjunction with electrical radiator SPHR)

For Model	Air Jet
	Ø mm
SP. 031D-044D	300
SP. 051D-065D	400
SP. 071D-084D	500

Corrosion protection

• Version V6.01

Cooler:

Tubing:	Cu
Fins:	Al „goldlack“ coating
End plates:	Al, anti-corrosion paint coating on both sides

Casing:

Top Panel:	Al or Sendzimir zinc-plated steel, anti-corrosion paint coating on both sides
------------	---

• Version V6.04

Cooler:

Tubing:	Cu
Fins:	Al „goldlack“ coating
End plates:	Al

Casing:

Top Panel:	Al, anti-corrosion paint coating
------------	----------------------------------

