



Küba Green Line



Küba market plus SP



High Performance Unit Cooler

| | | | |
|--|--|--|--|
| <p>Q_0</p> <p>1,2  52 kW</p> | <p>+10 °C</p> <p>±0 °C SPA.D</p> <p>-25 °C SPB.D</p> <p>t_{1}</p>  |  | <p>EUROVENT CERTIFIED PERFORMANCE</p>  <p>"CERTIFY ALL" Air Coolers</p> |
|--|--|--|--|




Application Benefits for Contractors and Operators




Expanded capacity range

- Up to 52 kW




- 250 mm
- 300 mm
- 400 mm
- 500 mm

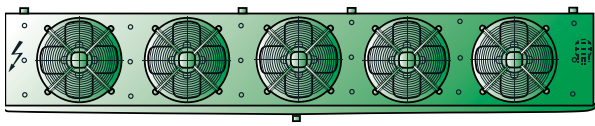


Closer-spaced capacity steps

- Thanks to five different fan sizes

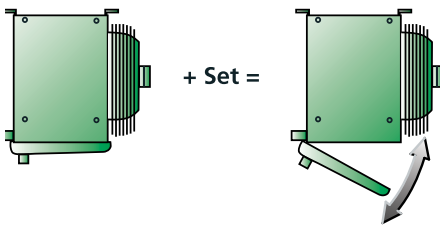

Quick cleaning

- Hinged drain tray as accessory (can be retro-fitted)

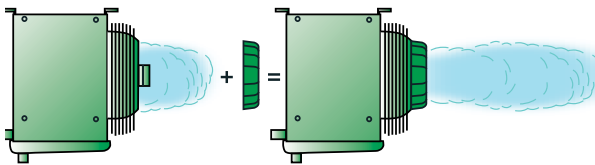


Increased air throw

- Küba Air Jet as accessory


Nomenclature

Standard

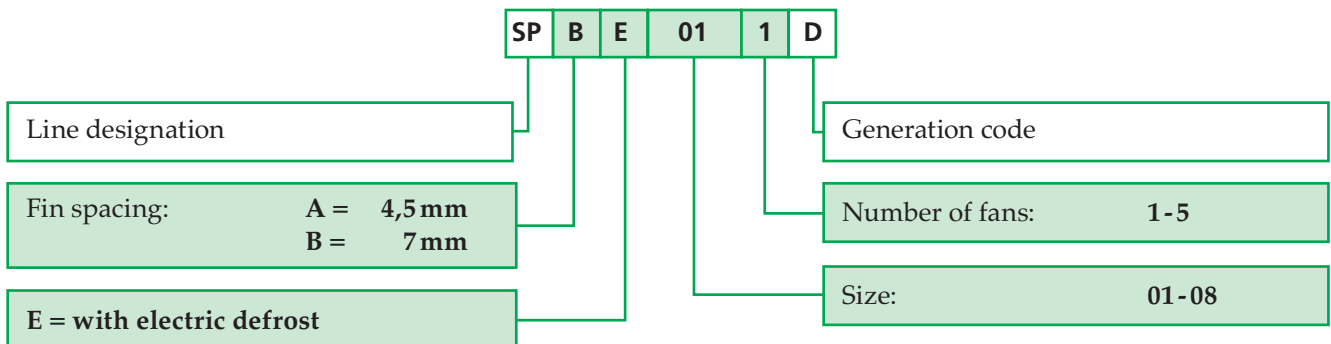



Construction

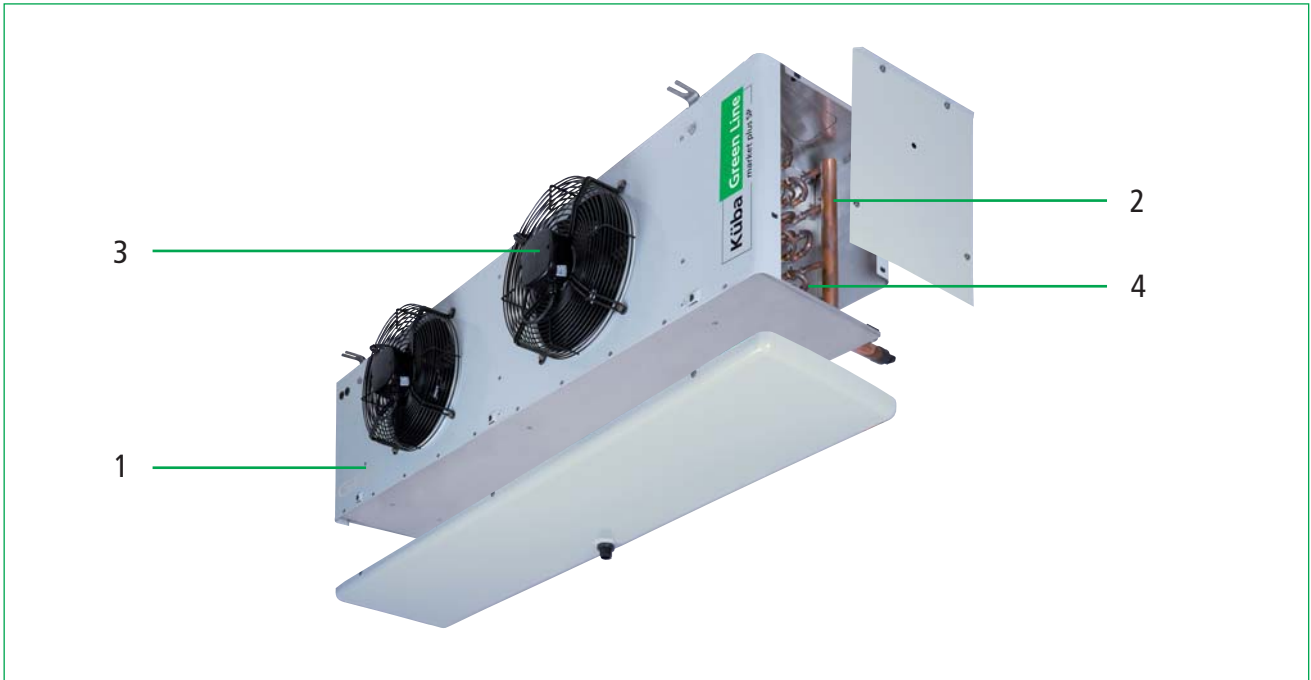

1. Casing

- Aluminium, smooth
- High-quality powder coating, papyrus white RAL 9018
 - Food-safe
 - Easy to clean
 - Best corrosion protection
- Removable side pieces

2. Cooler

- Internal cleanliness acc. to DIN 8964
- Fin spacing: SPA.D: 4,5 mm, SPB.D: 7,0 mm
- Refrigerant distributor:
 - SPA.D: Flow distributor
 - SPB.D: Küba-CAL®
- Tubing Cu-Special, Fins Al, End plates Al

3. Fans CE

- Fans wired up to an internal terminal box:
 - Ø 250 mm / Ø 300 mm / Ø 400 mm
- With built-in protector according to VDE provisions (Ø 500 mm: Led-out protector)
- Application range: RT: -30 °C to +50 °C
- Voltage:
 - SP. 011 – 065D = 230 V ±10 %, V-1 50/60 Hz, adjustable
 - SP. 071 – 084D = 400 V ±10 %, V-3 50/60 Hz

- Index of protection acc. to DIN 40050:

- SP. 011 – 024D = IP42
- SP. 031 – 065D = IP44
- SP. 071 – 084D = IP54

- Insulation class acc. to VDE 0700

- SP. 011 – 065D = Insulation class B
- SP. 071 – 084D = Insulation class F

- Operating values are the actual values of the built-in motor at +20 °C, with unobstructed air flow and a dry surface, as required for the refrigeration load calculation

Motor label data (max. allowable value +40 °C)

| | Ø mm | 50 Hz | | | 60 Hz | | |
|-------------|------|-------------------|-----|------|-------------------|-----|------|
| | | min ⁻¹ | W | A | min ⁻¹ | W | A |
| SP.01.-02.D | 250 | 1300 | 90 | 0,62 | 1550 | 80 | 0,55 |
| SP.03.-04.D | 300 | 1340 | 80 | 0,36 | 1460 | 112 | 0,48 |
| SP.05.-06.D | 400 | 1420 | 188 | 0,83 | 1630 | 270 | 1,20 |
| SP.07.-08.D | 500 | 1350 | 565 | 1,13 | 1450 | 830 | 1,50 |

4. Electric defrost

- Wired-up, ready to connect in terminal box
- To prevent steam build-up and to accomplish heat exchange with almost no loss, the heaters are mounted in special expanded tube sleeves
- 230 V-1 / 400 V-3-Y
- With splash pan




Technical data

SPA(E)...D



1,6 kW 52 kW




| Model | Rating Q_0 at 50 Hz DT1, R404A | | Surface m ² | Air flow m ³ /h | Air throw m | Tube volume dm ³ | Connections | | Sound L_{WA} ... | Blade St. x Ø mm | Fans \oplus (Operating values at 50 Hz) | | | |
|----------|--|---|---------------------------|-------------------------------|-------------------|-----------------------------------|---------------|----------------|-----------------------|---------------------|--|------------------------------|-----|------|
| | $t_{L1} \pm 0^\circ\text{C}$ DT1 = 8K | $t_{L1} +10^\circ\text{C}$ DT1 = 10K | | | | | Inlet Ø mm | Outlet Ø mm | | | Type of current | Per Fan min ⁻¹ | W | A |
| SPA 011D | 1,65 | 2,44 | 6,9 | 820 | 4 | 1,4 | 10 | 12 | 63 | 1 x 250 | 230V -1 | 1347 | 85 | 0,59 |
| SPA 021D | 1,80 | 2,65 | 9,1 | 760 | 4 | 1,9 | 10 | 12 | 63 | 1 x 250 | 230V -1 | 1347 | 85 | 0,59 |
| SPA 031D | 2,65 | 3,93 | 10,3 | 1380 | 6 | 2,1 | 10 | 18 | 70 | 1 x 300 | 230V -1 | 1340 | 80 | 0,36 |
| SPA 041D | 3,00 | 4,44 | 13,6 | 1300 | 5 | 2,8 | 12* | 22 | 70 | 1 x 300 | 230V -1 | 1340 | 80 | 0,36 |
| SPA 051D | 6,05 | 8,98 | 20,5 | 3020 | 8 | 4,2 | 12* | 28 | 77 | 1 x 400 | 230V -1 | 1420 | 188 | 0,83 |
| SPA 061D | 6,83 | 10,1 | 30,6 | 2720 | 7 | 6,3 | 12* | 28 | 77 | 1 x 400 | 230V -1 | 1420 | 188 | 0,83 |
| SPA 071D | 11,3 | 16,8 | 36,3 | 5800 | 17 | 7,6 | 15* | 35 | 83 | 1 x 500 | 400V -3 | 1362 | 560 | 1,01 |
| SPA 081D | 13,1 | 19,3 | 54,2 | 5270 | 16 | 11,1 | 15* | 35 | 83 | 1 x 500 | 400V -3 | 1362 | 560 | 1,01 |
| SPA 022D | 3,62 | 5,34 | 18,2 | 1520 | 6 | 3,6 | 12* | 22 | 66 | 2 x 250 | 230V -1 | 1347 | 85 | 0,59 |
| SPA 032D | 5,33 | 7,90 | 20,6 | 2760 | 8 | 4,1 | 12* | 28 | 73 | 2 x 300 | 230V -1 | 1340 | 80 | 0,36 |
| SPA 042D | 6,02 | 8,92 | 27,3 | 2600 | 7 | 5,5 | 12* | 28 | 73 | 2 x 300 | 230V -1 | 1340 | 80 | 0,36 |
| SPA 052D | 11,9 | 17,7 | 40,9 | 6040 | 12 | 8,2 | 15* | 35 | 80 | 2 x 400 | 230V -1 | 1420 | 188 | 0,83 |
| SPA 062D | 13,4 | 19,7 | 60,9 | 5440 | 11 | 12,1 | 15* | 35 | 80 | 2 x 400 | 230V -1 | 1420 | 188 | 0,83 |
| SPA 072D | 21,7 | 31,9 | 72,7 | 11600 | 22 | 14,3 | 15* | 42 | 86 | 2 x 500 | 400V -3 | 1362 | 560 | 1,01 |
| SPA 082D | 25,7 | 37,9 | 108,3 | 10540 | 21 | 21,5 | 22* | 42 | 86 | 2 x 500 | 400V -3 | 1362 | 560 | 1,01 |
| SPA 023D | 5,51 | 8,16 | 27,3 | 2280 | 8 | 5,3 | 12* | 28 | 68 | 3 x 250 | 230V -1 | 1347 | 85 | 0,59 |
| SPA 043D | 8,96 | 13,3 | 40,9 | 3900 | 10 | 8,0 | 15* | 35 | 75 | 3 x 300 | 230V -1 | 1340 | 80 | 0,36 |
| SPA 053D | 18,2 | 27,0 | 61,4 | 9060 | 15 | 12,0 | 22* | 42 | 82 | 3 x 400 | 230V -1 | 1420 | 188 | 0,83 |
| SPA 063D | 20,6 | 30,4 | 91,5 | 8160 | 13 | 18,0 | 22* | 42 | 82 | 3 x 400 | 230V -1 | 1420 | 188 | 0,83 |
| SPA 073D | 33,4 | 49,5 | 109,2 | 17400 | 26 | 21,3 | 22* | 54 | 88 | 3 x 500 | 400V -3 | 1362 | 560 | 1,01 |
| SPA 083D | 38,3 | 56,3 | 162,7 | 15810 | 24 | 32,2 | 22* | 54 | 88 | 3 x 500 | 400V -3 | 1362 | 560 | 1,01 |
| SPA 024D | 7,26 | 10,7 | 36,3 | 3040 | 9 | 7,1 | 12* | 28 | 69 | 4 x 250 | 230V -1 | 1347 | 85 | 0,59 |
| SPA 044D | 11,7 | 17,2 | 54,5 | 5200 | 12 | 10,6 | 15* | 35 | 76 | 4 x 300 | 230V -1 | 1340 | 80 | 0,36 |
| SPA 064D | 26,9 | 39,6 | 122,0 | 10880 | 16 | 23,7 | 22* | 42 | 83 | 4 x 400 | 230V -1 | 1420 | 188 | 0,83 |
| SPA 074D | 43,5 | 64,1 | 145,5 | 23200 | 28 | 28,6 | 22* | 54 | 89 | 4 x 500 | 400V -3 | 1362 | 560 | 1,01 |
| SPA 084D | 51,6 | 76,1 | 216,9 | 21080 | 26 | 41,0 | 28** | 54 | 89 | 4 x 500 | 400V -3 | 1362 | 560 | 1,01 |
| SPA 065D | 34,1 | 50,4 | 152,4 | 13600 | 18 | 28,9 | 22* | 54 | 84 | 5 x 400 | 230V -1 | 1420 | 188 | 0,83 |

Multiple injection via * flow distributor, ** KÜBA-CAL® distributor
The technical data are also given in the product selection software.

*** Modification of sound power level, see page 59


Available for
CO₂-DX
up to 54 bar

Q_v - diagram (R22, R134A, R404A, R507)

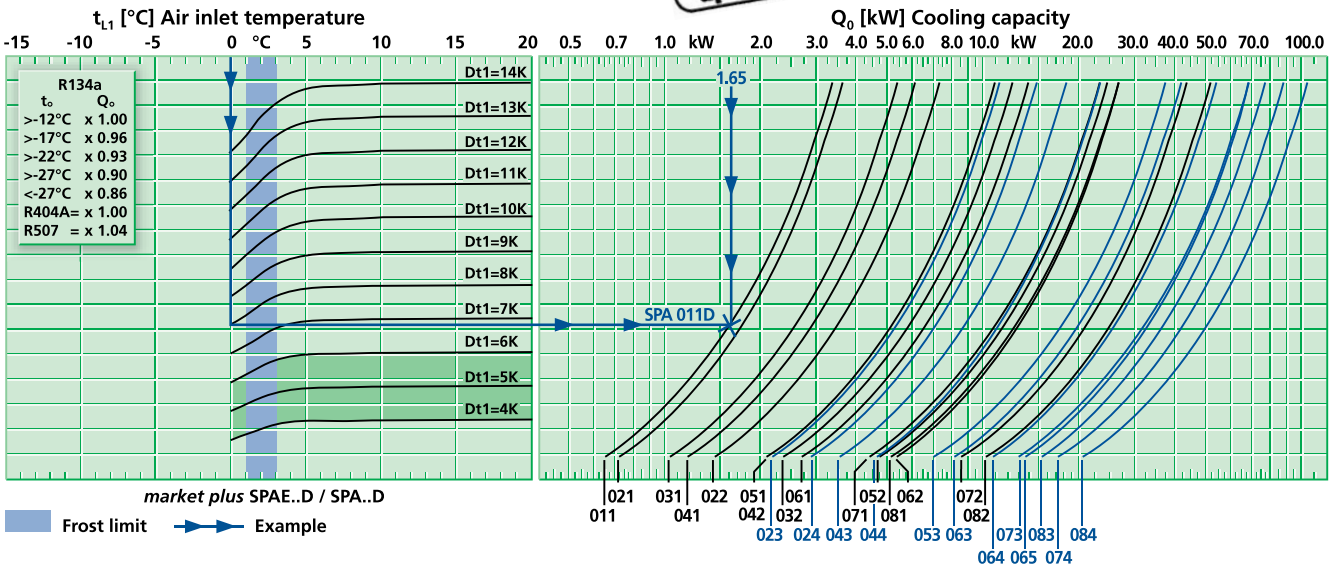



Technical data **SPB(E)...D**

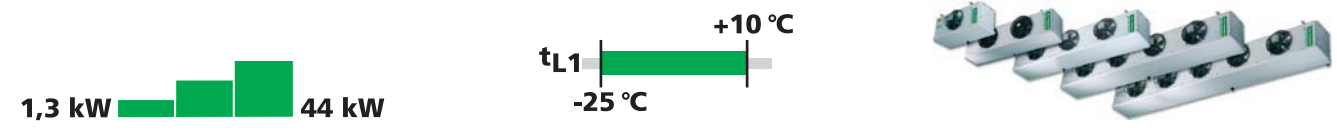

| Model | Rating Q_0 at 50 Hz DT1, R404A | Surface | | Air flow | Air throw | Tube volume | Connections | | Sound | Fans \odot (Operating values at 50 Hz) | | | | | |
|----------|-------------------------------------|--|--|-----------------------|-----------------------|---------------|------------------|------------------------|-------------------------|---|------------------------------|-------------------|---------|-----|------|
| | | $t_{li} \pm 0^\circ\text{C}$ DT1 = 8K | $t_{li} -18^\circ\text{C}$ DT1 = 7K | m^2 | m^3/h | m | dm^3 | Inlet \varnothing mm | Outlet \varnothing mm | L_{WA} dB(A) | Blade | Type of current | Per Fan | | |
| | kW | kW | m^2 | m^3/h | m | dm^3 | \varnothing mm | \varnothing mm | dB(A) | St. x \varnothing mm | 230 \pm 10% V-1 50/60Hz | min ⁻¹ | W | A | |
| SPB 011D | \odot | 1,28 | 1,01 | 4,6 | 880 | 4 | 1,4 | 10 | 12 | 63 | 1 x 250 | 230V-1 | 1347 | 85 | 0,59 |
| SPB 021D | \odot | 1,51 | 1,20 | 6,0 | 850 | 4 | 1,9 | 10 | 12 | 63 | 1 x 250 | 230V-1 | 1347 | 85 | 0,59 |
| SPB 031D | \odot | 2,03 | 1,61 | 6,9 | 1450 | 7 | 2,1 | 10 | 18 | 70 | 1 x 300 | 230V-1 | 1340 | 80 | 0,36 |
| SPB 041D | \odot | 2,45 | 1,94 | 9,1 | 1420 | 6 | 2,8 | 12* | 22 | 70 | 1 x 300 | 230V-1 | 1340 | 80 | 0,36 |
| SPB 051D | \odot | 4,78 | 3,78 | 13,7 | 3320 | 9 | 4,2 | 12* | 28 | 77 | 1 x 400 | 230V-1 | 1420 | 188 | 0,83 |
| SPB 061D | \odot | 5,93 | 4,70 | 20,4 | 3080 | 8 | 6,3 | 12* | 28 | 77 | 1 x 400 | 230V-1 | 1420 | 188 | 0,83 |
| SPB 071D | \odot | 8,75 | 6,92 | 24,3 | 6250 | 18 | 7,6 | 15* | 35 | 83 | 1 x 500 | 400V-3 | 1362 | 560 | 1,01 |
| SPB 081D | \odot | 11,1 | 8,76 | 36,3 | 5880 | 17 | 11,1 | 15* | 35 | 83 | 1 x 500 | 400V-3 | 1362 | 560 | 1,01 |
| SPB 022D | $\odot\odot$ | 3,03 | 2,41 | 12,2 | 1700 | 6 | 3,6 | 12* | 22 | 66 | 2 x 250 | 230V-1 | 1347 | 85 | 0,59 |
| SPB 032D | $\odot\odot$ | 4,05 | 3,21 | 13,7 | 2900 | 9 | 4,1 | 12* | 28 | 73 | 2 x 300 | 230V-1 | 1340 | 80 | 0,36 |
| SPB 042D | $\odot\odot$ | 4,89 | 3,88 | 18,2 | 2840 | 8 | 5,5 | 12* | 28 | 73 | 2 x 300 | 230V-1 | 1340 | 80 | 0,36 |
| SPB 052D | $\odot\odot$ | 9,49 | 7,52 | 27,3 | 6640 | 13 | 8,2 | 15* | 35 | 80 | 2 x 400 | 230V-1 | 1420 | 188 | 0,83 |
| SPB 062D | $\odot\odot$ | 11,7 | 9,31 | 40,7 | 6160 | 12 | 12,1 | 15* | 35 | 80 | 2 x 400 | 230V-1 | 1420 | 188 | 0,83 |
| SPB 072D | $\odot\odot$ | 17,1 | 13,5 | 48,6 | 12500 | 23 | 14,3 | 15* | 42 | 86 | 2 x 500 | 400V-3 | 1362 | 560 | 1,01 |
| SPB 082D | $\odot\odot$ | 21,9 | 17,4 | 72,5 | 11760 | 22 | 21,5 | 22* | 42 | 86 | 2 x 500 | 400V-3 | 1362 | 560 | 1,01 |
| SPB 023D | $\odot\odot\odot$ | 4,59 | 3,63 | 18,2 | 2550 | 8 | 5,3 | 12* | 28 | 68 | 3 x 250 | 230V-1 | 1347 | 85 | 0,59 |
| SPB 043D | $\odot\odot\odot$ | 7,31 | 5,80 | 27,3 | 4260 | 11 | 8,0 | 15* | 35 | 75 | 3 x 300 | 230V-1 | 1340 | 80 | 0,36 |
| SPB 053D | $\odot\odot\odot$ | 14,4 | 11,4 | 41,0 | 9960 | 16 | 12,0 | 22* | 42 | 82 | 3 x 400 | 230V-1 | 1420 | 188 | 0,83 |
| SPB 063D | $\odot\odot\odot$ | 17,8 | 14,1 | 61,1 | 9240 | 14 | 18,0 | 22* | 42 | 82 | 3 x 400 | 230V-1 | 1420 | 188 | 0,83 |
| SPB 073D | $\odot\odot\odot$ | 26,0 | 20,6 | 73,0 | 18750 | 27 | 21,3 | 22* | 54 | 88 | 3 x 500 | 400V-3 | 1362 | 560 | 1,01 |
| SPB 083D | $\odot\odot\odot$ | 32,6 | 25,9 | 108,8 | 17640 | 25 | 32,2 | 22* | 54 | 88 | 3 x 500 | 400V-3 | 1362 | 560 | 1,01 |
| SPB 024D | $\odot\odot\odot\odot$ | 6,08 | 4,82 | 24,3 | 3400 | 9 | 7,1 | 12* | 28 | 69 | 4 x 250 | 230V-1 | 1347 | 85 | 0,59 |
| SPB 044D | $\odot\odot\odot\odot$ | 9,63 | 7,65 | 36,5 | 5680 | 13 | 10,6 | 15* | 35 | 76 | 4 x 300 | 230V-1 | 1340 | 80 | 0,36 |
| SPB 064D | $\odot\odot\odot\odot$ | 23,5 | 18,7 | 81,6 | 12320 | 17 | 23,7 | 22* | 42 | 83 | 4 x 400 | 230V-1 | 1420 | 188 | 0,83 |
| SPB 074D | $\odot\odot\odot\odot$ | 34,2 | 27,1 | 97,1 | 25000 | 30 | 28,6 | 22* | 54 | 89 | 4 x 500 | 400V-3 | 1362 | 560 | 1,01 |
| SPB 084D | $\odot\odot\odot\odot$ | 43,8 | 34,7 | 144,8 | 23520 | 28 | 41,0 | 28* | 54 | 89 | 4 x 500 | 400V-3 | 1362 | 560 | 1,01 |
| SPB 065D | $\odot\odot\odot\odot\odot$ | 29,7 | 23,5 | 101,9 | 15400 | 19 | 28,9 | 22* | 54 | 84 | 5 x 400 | 230V-1 | 1420 | 188 | 0,83 |


Multiple injection via * KÜBA-CAL® distributor

The technical data are also given in the product selection software.

** Modification of sound power level, see page 59



Q_v - diagram (R22, R134A, R404A, R507)

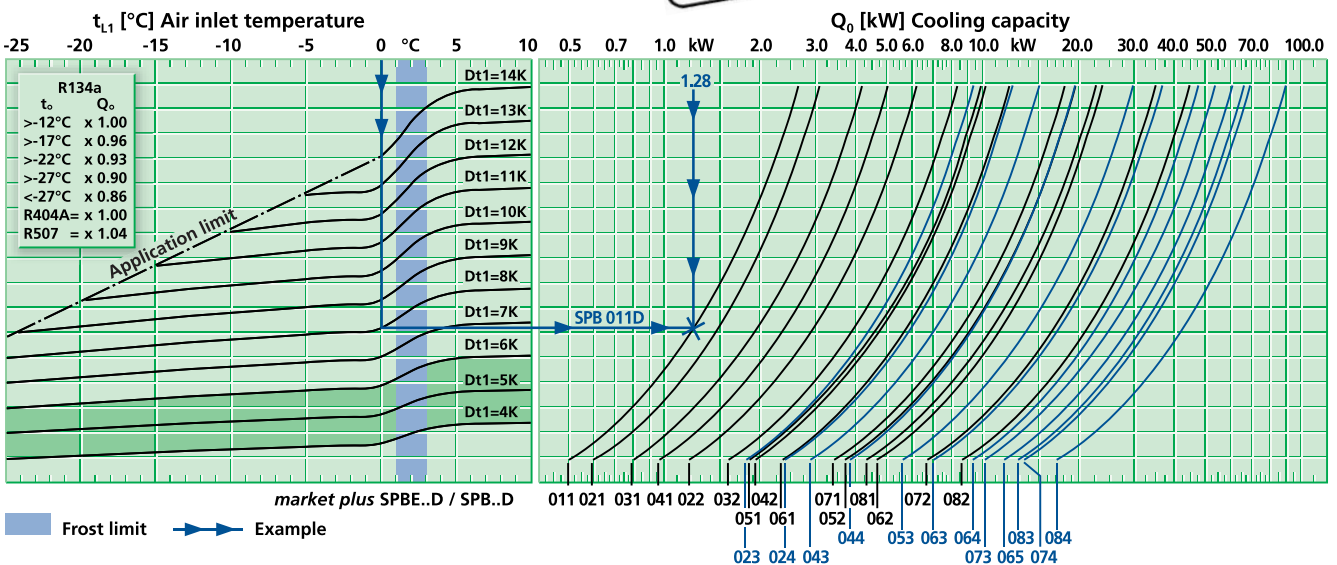




Dimensions, electric defrost, weights


| Model | Dimensions [mm] | | | | | | | | | | Electric defrost 230 V-1 / 400 V-3-Y | | | Weight (net) | | Weight (gross) | |
|----------|-----------------|------|-----|-----|----------------|----------------|----------------|-----|-----|-----|---|------|-------|--------------|-------|----------------|-------|
| | H | B | T | L | E ₁ | E ₂ | E ₃ | F | A | W | Coil | Tray | Total | SPA.D | SPB.D | SPA.D | SPB.D |
| | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | kW | kW | kW | kg | kg | kg | kg |
| SP. 011D | 354 | 810 | 424 | 350 | 530 | - | - | 140 | 92 | 200 | 1,07 | 0,58 | 1,65 | 13 | 12 | 16 | 15 |
| SP. 021D | 354 | 810 | 424 | 350 | 530 | - | - | 140 | 92 | 200 | 1,07 | 0,58 | 1,65 | 13,5 | 13 | 16,5 | 16 |
| SP. 031D | 430 | 970 | 421 | 350 | 630 | - | - | 170 | 90 | 200 | 1,23 | 0,69 | 1,92 | 16,5 | 16,5 | 20,5 | 20,5 |
| SP. 041D | 430 | 970 | 421 | 350 | 630 | - | - | 170 | 90 | 200 | 1,23 | 0,69 | 1,92 | 18,5 | 18 | 22,5 | 22 |
| SP. 051D | 509 | 1180 | 501 | 420 | 780 | - | - | 200 | 100 | 300 | 2,07 | 0,88 | 2,95 | 27 | 26 | 32,5 | 31,5 |
| SP. 061D | 509 | 1180 | 501 | 420 | 780 | - | - | 200 | 100 | 300 | 2,90 | 0,88 | 3,78 | 32,5 | 33 | 38 | 38,5 |
| SP. 071D | 661 | 1430 | 592 | 500 | 1030 | - | - | 200 | 110 | 400 | 3,52 | 0,50 | 4,02 | 50 | 48 | 70 | 68 |
| SP. 081D | 661 | 1430 | 592 | 500 | 1030 | - | - | 200 | 110 | 400 | 5,52 | 0,50 | 6,02 | 60 | 58 | 80 | 78 |
| SP. 022D | 354 | 1310 | 424 | 350 | 1030 | - | - | 140 | 92 | 200 | 1,84 | 0,96 | 2,80 | 23 | 24 | 27 | 28 |
| SP. 032D | 430 | 1570 | 421 | 350 | 1230 | - | - | 170 | 90 | 200 | 2,14 | 1,15 | 3,29 | 30 | 29 | 47,5 | 46,5 |
| SP. 042D | 430 | 1570 | 421 | 350 | 1230 | - | - | 170 | 90 | 200 | 2,14 | 1,15 | 3,29 | 33 | 32,5 | 50,5 | 50 |
| SP. 052D | 509 | 1930 | 501 | 420 | 1530 | - | - | 200 | 100 | 300 | 3,90 | 1,44 | 5,34 | 48,5 | 46 | 68,5 | 66 |
| SP. 062D | 509 | 1930 | 501 | 420 | 1530 | - | - | 200 | 100 | 300 | 5,20 | 1,44 | 6,64 | 63,5 | 54 | 83,5 | 74 |
| SP. 072D | 661 | 2430 | 592 | 500 | 2030 | - | - | 200 | 110 | 400 | 6,74 | 0,86 | 7,60 | 89 | 86 | 173 | 170 |
| SP. 082D | 661 | 2430 | 592 | 500 | 2030 | - | - | 200 | 110 | 400 | 10,11 | 0,86 | 10,97 | 110,5 | 105 | 194,5 | 189 |
| SP. 023D | 354 | 1810 | 424 | 350 | 1530 | - | - | 140 | 92 | 200 | 2,60 | 1,30 | 3,90 | 34,5 | 33,5 | 53,5 | 52,5 |
| SP. 043D | 430 | 2170 | 421 | 350 | 1830 | - | - | 170 | 90 | 200 | 3,18 | 1,59 | 4,77 | 45,5 | 46,5 | 66 | 67 |
| SP. 053D | 509 | 2680 | 501 | 420 | 2280 | 750 | - | 200 | 100 | 300 | 5,63 | 1,95 | 7,58 | 74,5 | 67 | 133,5 | 126 |
| SP. 063D | 509 | 2680 | 501 | 420 | 2280 | 750 | - | 200 | 100 | 300 | 7,50 | 1,95 | 9,45 | 84,5 | 84,5 | 143,5 | 143,5 |
| SP. 073D | 661 | 3430 | 592 | 500 | 3030 | 1000 | - | 200 | 110 | 400 | 9,20 | 1,82 | 11,02 | 131 | 132 | 236 | 237 |
| SP. 083D | 661 | 3430 | 592 | 500 | 3030 | 1000 | - | 200 | 110 | 400 | 13,80 | 1,82 | 15,62 | 164 | 159 | 269 | 264 |
| SP. 024D | 354 | 2310 | 424 | 350 | 2030 | 1000 | - | 140 | 92 | 200 | 3,37 | 1,72 | 5,09 | 46 | 42,5 | 70,5 | 67 |
| SP. 044D | 430 | 2770 | 421 | 350 | 2430 | 1200 | - | 170 | 90 | 200 | 4,00 | 2,00 | 6,00 | 59 | 60,5 | 119 | 120,5 |
| SP. 064D | 509 | 3430 | 501 | 420 | 3030 | 1500 | - | 200 | 100 | 300 | 9,20 | 1,82 | 11,02 | 118,5 | 110,5 | 222,5 | 214,5 |
| SP. 074D | 661 | 4430 | 592 | 500 | 4030 | 2000 | - | 200 | 110 | 400 | 12,72 | 2,39 | 15,11 | 178 | 173 | 288 | 283 |
| SP. 084D | 661 | 4430 | 592 | 500 | 4030 | 2000 | - | 200 | 110 | 400 | 19,08 | 2,39 | 21,47 | 221 | 196 | 331 | 306 |
| SP. 065D | 509 | 4180 | 501 | 420 | 3780 | 1500 | 2250 | 200 | 100 | 300 | 11,92 | 2,24 | 14,16 | 146 | 141 | 242 | 237 |




Dimensional drawings

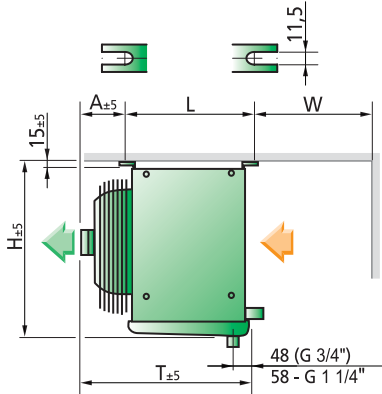


SP(E) 011, 021, 031, 041, 051, 061, 071, 081 D




SP(E) 022, 032, 042, 052, 062, 072, 082 D

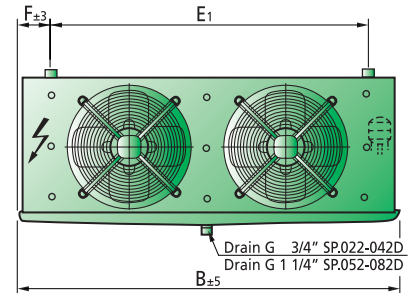


SP(E) 023, 043, 053, 063, 073, 083 D

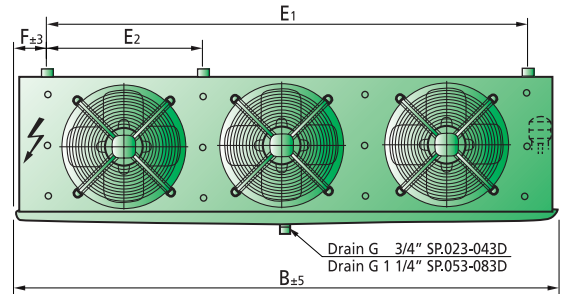

SP(E) 024, 044, 064, 074, 084 D

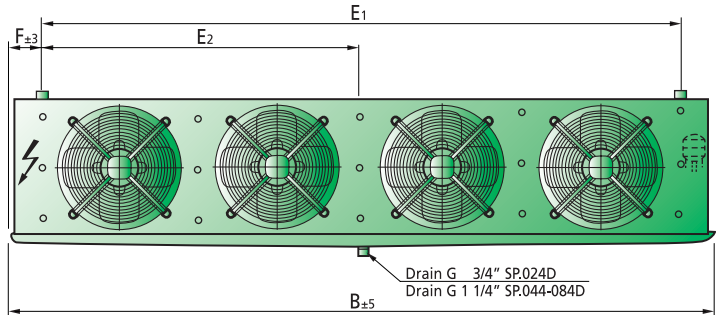

SP(E) 065 D

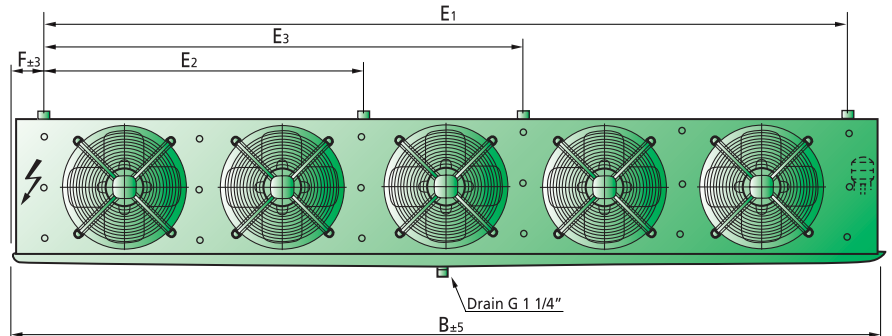



Constructions, Variants and Accessories

Water / brine operation

Please use our Küba selection software for configuring the brine Air Coolers. Do not hesitate to contact us if you have any further questions.

Configuration

- Soldered connections
- Ventilation and drainage

Corrosion protection

• **Version V6.01**

Cooler:

- Tubing: Cu
- Fins: Al „goldlack“ coating
- End plates: Al, anti-corrosion paint coating on both sides

Casing:

- Top Panel: Al or Sendzimir zinc-plated steel, anti-corrosion paint coating on both sides

• **Version V6.04**

Cooler:

- Tubing: Cu
- Fins: Al „goldlack“ coating
- End plates: Al

Casing:

- Top Panel: Al, anti-corrosion paint coating

Küba Air Jet

Advantages

- Longer air throw
- Even temperature distribution in cooled room



Loose as accessory



In mounted condition

Information:

Delivered not fitted
(Cannot be used in conjunction with electrical radiator SPHR)

| For Model | Air Jet |
|---------------|---------|
| | Ø mm |
| SP. 031D-044D | 300 |
| SP. 051D-065D | 400 |
| SP. 071D-084D | 500 |