



Compressor Selection: 2-stage Semi-hermetic Reciprocating Compressors

Input Values

Compressor model	S6F-30.2Y	Suction gas temperature	20,00 °C
Refrigerant	R404A	Useful superheat	100%
Reference temperature	Dew point temp.	Power supply	400V-3-50Hz
Operating mode	with sub cooler		


Result

Q [W]	Cooling capacity	COP [-]	COP/EER
Q* [W]	Cooling capacity *	COP* [-]	COP/EER *
P [kW]	Power input	mLP [kg/h]	Mass flow LP
I [A]	Current	pm [bar(a)]	Intermed. pressure
Qc [W]	Condenser Capacity		

tc	to	-25°C	-30°C	-35°C	-40°C	-45°C	-50°C	-55°C	-60°C
30°C	Q [W]	43398	37364	31720	26476	21683	17403	13681	10525
	Q* [W]	38061	31728	26046	21007	16617	12884	9788	7281
	P [kW]	22,5	20,6	18,78	16,94	15,15	13,42	11,77	10,20
	I [A]	38,0	35,3	32,7	30,2	27,8	25,6	23,6	21,8
	Qc [W]	65931	58009	50495	43414	36830	30821	25446	20727
	COP [-]	1,93	1,81	1,69	1,56	1,43	1,30	1,16	1,03
	COP* [-]	1,69	1,54	1,39	1,24	1,10	0,96	0,83	0,71
	mLP [kg/h]	927	769	628	505	398	308	234	173,5
	pm [bar(a)]	6,87	6,01	5,20	4,46	3,78	3,17	2,64	2,17
	40°C	Q [W]	41459	35708	30285	25259	20702	16663	13153
Q* [W]		33796	28022	22889	18393	14532	11281	8592	6397
P [kW]		25,2	23,1	21,0	18,96	16,95	15,00	13,14	11,37
I [A]		41,8	38,8	35,8	32,9	30,2	27,6	25,2	23,1
Qc [W]		66656	58807	51299	44217	37650	31666	26292	21515
COP [-]		1,65	1,55	1,44	1,33	1,22	1,11	1,00	0,89
COP* [-]		1,34	1,21	1,09	0,97	0,86	0,75	0,65	0,56
mLP [kg/h]		924	762	619	496	390	302	230	170,7
pm [bar(a)]		7,48	6,55	5,70	4,92	4,21	3,56	2,98	2,46
50°C		Q [W]	39476	33950	28813	24105	19850	16042	12634
	Q* [W]	28962	23983	19587	15764	12489	9713	7364	
	P [kW]	28,1	25,7	23,3	21,0	18,75	16,57	14,49	
	I [A]	45,9	42,5	39,1	35,8	32,6	29,7	26,9	
	Qc [W]	67542	59635	52139	45113	38602	32616	27127	
	COP [-]	1,41	1,32	1,24	1,15	1,06	0,97	0,87	
	COP* [-]	1,03	0,93	0,84	0,75	0,67	0,59	0,51	
	mLP [kg/h]	912	750	610	488	386	299	226	
	pm [bar(a)]	8,15	7,16	6,26	5,44	4,68	3,99	3,36	

-- No calculation possible (see message in single point selection)
 *According to EN12900 (20°C suction gas temp., 0K liquid subcooling)


Application Limits

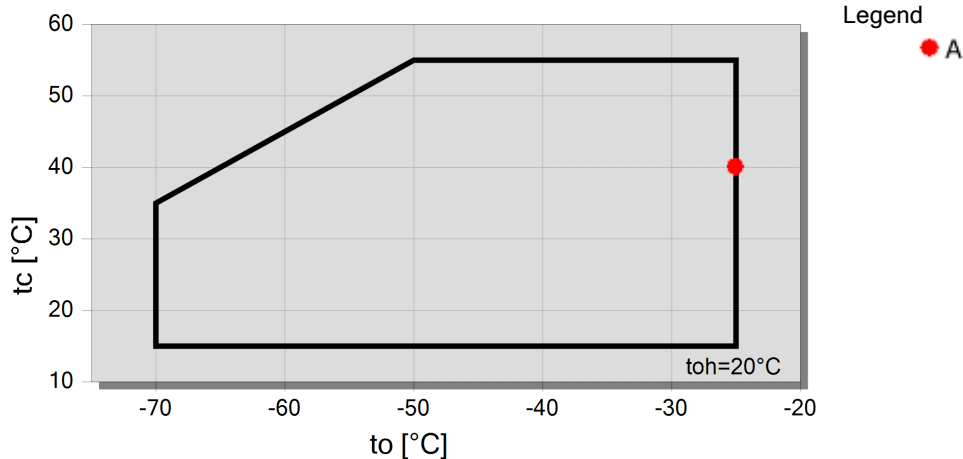



Technical Data: S6F-30.2Y

Dimensions and Connections

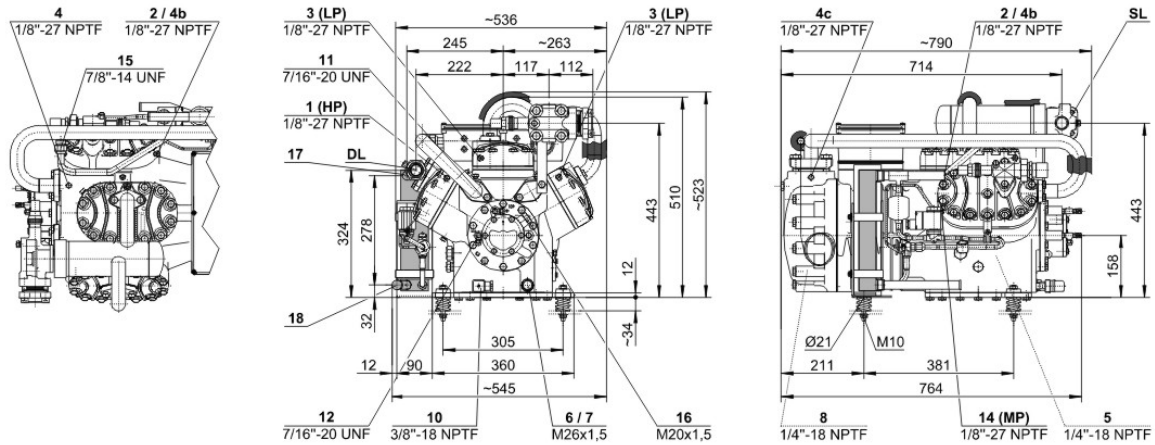

Technical Data

Technical Data

Displacement (1450 RPM 50Hz)	101.10 / 50.50 m ³ /h
Displacement (1750 RPM 60Hz)	122.02 / 60.95 m ³ /h
No. of cylinder x bore LP/HP x stroke	6 x 82/ 82 mm x 55 mm
Weight	234 kg
Max. pressure (LP/MP/HP)	19 / 19 / 28 bar
Connection suction line	42 mm - 1 5/8"
Connection discharge line	35 mm - 1 3/8"
Oil type R404A/R507A	BSE32 (Option)
Oil type R22	B5.2 (Standard)

Motor data

Motor voltage (more on request)	380-420V PW-3-50Hz
Max operating current	51.0 A
Winding ratio	50/50
Starting current (Rotor locked)	135.0 A Y / 220.0 A YY
Max. Power input	31,9 kW

Extent of delivery (Standard)

Motor protection	SE-B2 (Standard)
Enclosure class	IP54 (Standard), IP66 (Option)
Vibration dampers	Standard
TX valve for liquid injection	Standard
Sight glass	Standard
Filter Drier	Standard
Solenoid valve	Standard
Oil charge	4.75 dm ³

Available Options

Crankcase heater	140 W (Option)
Oil pressure monitoring	MP54 (Option), Delta P II (Option)
Oil service valve	Option
Discharge gas temperature sensor	Option
CIC (only for R22, instead of TX valve for LI)	Option
Liquid sub cooler (also mounted)	Option