


Bitzer 2U-5.2 Water-cooled condensing unit

Specifications

| | |
|------------------------------|-------------------------------------|
| Brand | Bitzer |
| Type | 2U-5.2 Water-cooled condensing unit |
| Refrigerant | Freon |
| kW at 0°C/+40°C | 15,2 |
| kW at -5°C/+40°C | 12,6 |
| kW at -10°C/+40°C | 10,3 |
| kW at -20°C/+40°C | 6,7 |
| kW at -30°C/+40°C | 4,0 |
| On steel base frame | ✓ |
| Pressure safety switches | ✓ |
| Hp/Lp/Op | |
| Condensing pressure switches | ✓ |
| Sight Glass | ✓ |
| m ³ / h | 50 Hz - 18,6 m ³ /h |
| Remarks | Y.o.b. 1998 |
| Condensing Unit | ✓ |
| Sizes | 900x450x650 mm (LxWxH) |

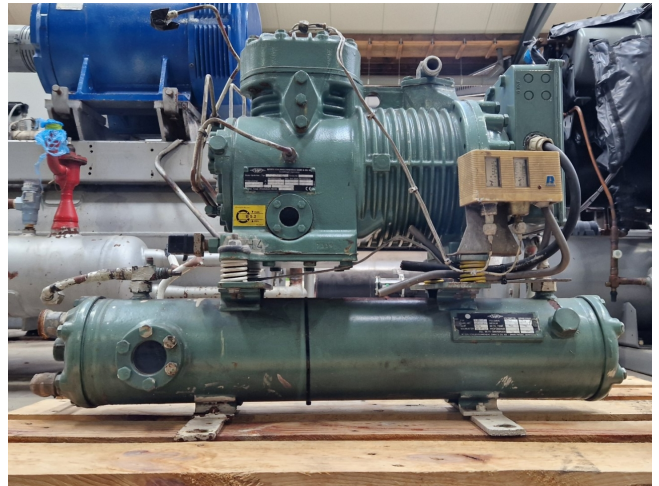

Description

Used Bitzer 2U-5.2 Water-cooled condensing unit

Used water-cooled condensing unit on Freon. Complete with a Bitzer 2U-5.2 semi-hermetic reciprocating compressor, Bitzer K202 HB shell and tube condenser, pressure and safety switches and a sight glasses. The compressor has a displacement of 18,6 m³/h at 50 Hz.

*Why choose for HOSBV? Were not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and deliver after an industrial cleaning. *If requested we are happy to arrange your logistics

