

# Güntner S-GGHF 050.1D/37-AS/8P

## Specifications



Brand	Güntner
Type	S-GGHF 050.1D/37-AS/8P
kW	32.6
Refrigerant	Glycol
Number of Fans	3
Fin Space in mm	7
Defrosting	Electric
m <sup>3</sup> /h	19.920
Sizes	3363x713x747MM (LxWxH)
Remarks	Y.o.b. 2009



## Description

### Used Güntner S-GGHF 050.1D/37-AS/8P

Size: 3363x713x747MM (LxWxH)  
 Weight: 209 Kg Fin space: 7mm m<sup>3</sup>/h: 19.920 Fans: 3 Hertz fans: 50 Rpm: 1410 Refrigerant: Glycol Brand: Guntner Model: S-GGHF 050.1D/37-AS/8P \*\*All components of this used evaporator(s) will be tested on good working, leak free condition (electro engine(s), coils, bearings) Choosing HOSBV means buying with warranty. We perform a industrial cleaning and rust spots will be covered. Also, we can arrange your shipment.

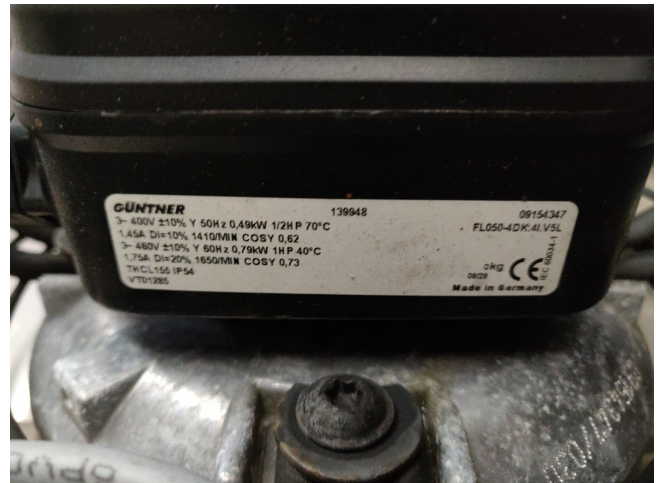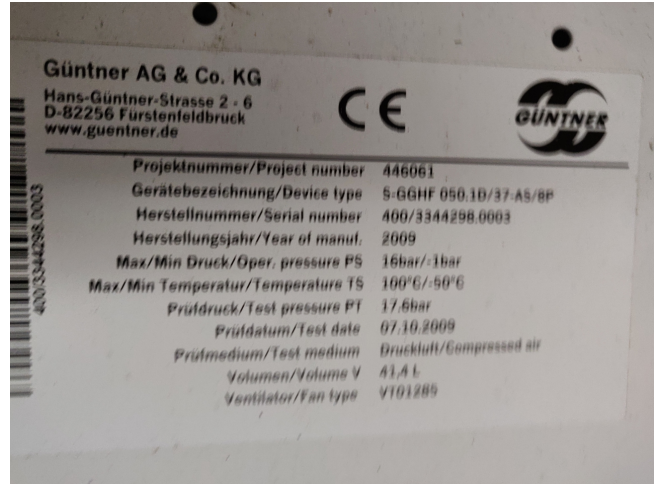

## GHF 50 Hz - 3 Ventilatoren - 3 Fans

Typ Type	Nennleistung Nominal capacity		Fläche Surface	Wärmeleistung Airflow	Wärmeleistung Airflow	Stoßdruck Static pressure level	Anschlüsse Connections		EI. Abtauheizung E1 defrost		Abmessungen Dimensions		Ab- lauf Drain								
	kW kW	m <sup>3</sup> /h m <sup>3</sup> /h					mm mm	mm mm	mm mm	mm mm	mm mm	mm mm		mm mm	mm mm	mm mm	mm mm				
020.1B/34-AW	2.45	1.99	11.4	2175	6	56	16"	18	1000	700	1.7	A	2.6	27	1313	362	326	1220	220	300	G1/4"
020.1B/34-AW	3.08	2.47	15.2	2100	5	56	16"	18	1000	700	1.7	A	3.4	29	1313	362	326	1220	220	300	G1/4"
011.1B/34-AW	4.74	3.66	19.9	4800	24	56	16"	18	1250	1000	2.25	A	4.4	49	1663	497	430	1570	295	300	G1/4"
011.1B/34-AW	6.1	4.74	26.6	4600	23	56	16"	22	1250	1000	2.25	A	5.8	53	1663	497	430	1570	295	300	G1/4"
011.1C/34-AW	8.2	6.5	39.8	4530	22	56	16"	28	2500	1000	3.5	A	8.7	60	1663	497	430	1570	295	300	G1/4"
040.1B/34-AW	11.7	9.3	49.1	9420	29	64	22"	35	3200	1250	4.45	A	10.3	86	2363	543	541	2040	419	400	G1/4"
040.1C/34-AW	16.1	12.6	73.6	9210	28	64	22"	35	4800	1250	6.05	B	15.5	98	2363	543	541	2040	419	400	G1/4"
045.1D/34-AW	25.7	20.3	115.6	15000	38	67	22"	42	9200	3300	12.5	B	23.8	156	3033	688	647	890	544	500	G1/4"
045.1D/34-AW	30.5	24.4	154.2	14520	37	67	22"	54	9200	3300	12.5	B	31.8	186	3033	688	647	890	544	500	G1/4"
050.1D/34-AS	33.9	26.5	151.6	19880	40	69	22"	54	12000	3300	15.3	D	31.0	190	3363	713	747	1000	544	550	G1/4"
050.1D/34-AS	39.7	31.6	202.1	18810	39	69	28"	54	12000	3300	15.3	D	41.4	227	3363	713	747	1000	544	550	G1/4"
020.1B/37-AW	2.30	1.82	9.1	2235	9	56	16"	18	1000	700	1.7	A	3.4	29	1313	362	326	1220	220	300	G1/4"
020.1C/37-AW	3.24	2.60	13.6	2145	8	56	16"	18	1000	700	1.7	A	5.2	33	1313	362	326	1220	220	300	G1/4"
011.1B/37-AW	4.58	3.63	15.9	5070	24	56	16"	22	1250	1000	2.25	A	5.8	47	1663	497	430	1570	295	300	G1/4"
011.1C/37-AW	6.6	5.0	23.8	4800	23	56	16"	22	2500	1000	3.5	A	8.7	53	1663	497	430	1570	295	300	G1/4"
011.1D/37-AW	8.1	6.5	31.8	4665	22	56	16"	35	2500	1000	3.5	A	11.6	64	1663	497	430	1570	295	300	G1/4"
040.1C/37-AW	12.5	9.9	44.1	9630	32	64	22"	35	4800	1250	6.05	B	15.5	89	2363	543	541	2040	419	400	G1/4"
040.1D/37-AW	15.4	12.0	58.7	9090	31	64	22"	35	6400	1250	7.65	B	20.6	107	2363	543	541	2040	419	400	G1/4"
045.1E/37-AW	25.3	19.6	92.3	15420	43	67	22"	42	9200	3300	12.5	B	31.8	169	3033	688	647	890	544	500	G1/4"
045.1E/37-AW	29.0	22.8	115.3	14910	41	67	22"	54	11500	3300	14.8	B	39.7	180	3033	688	647	890	544	500	G1/4"
050.1D/37-AS	32.6	26.1	120.9	19320	44	69	28"	54	12000	3300	15.3	D	41.4	209	3363	713	747	1000	544	550	G1/4"
050.1E/37-AS	37.8	29.2	151.2	19320	43	69	22"	54	14400	3300	17.7	E	51.0	221	3363	713	747	1000	544	550	G1/4"

Lagerprogramm, kurze Lieferzeit  
 (4 Tage + Transport)  
 Units in stock, short delivery times (4 days + transport)

\* Mehrfachspritzung  
 \* Multiple injection

