

Bock HGX12e/75-4 S

Specifications



Brand	Bock
Type	HGX12e/75-4 S
Refrigerant	CO2
kW at -10°C/+40°C	17.0
kW at -20°C/+40°C	14.10
kW at -30°C/+40°C	9.20
kW at -40°C/+40°C	5.5
Remarks	Capacity at 15°C condensing temp
Remarks	17.0 kW at -15°C/+15°C
Remarks	New in box never been used




Description

Used Bock HGX12e/75-4 S

Still new in the box, Bock HGX12e/75-4 S CO2 reciprocating compressor. *Why choose for HOSBV? Were not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning. Optional we can arrange the logistics.

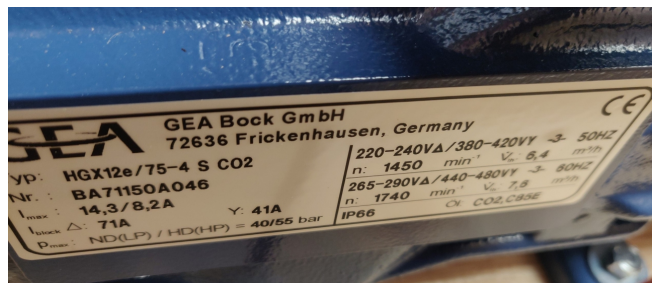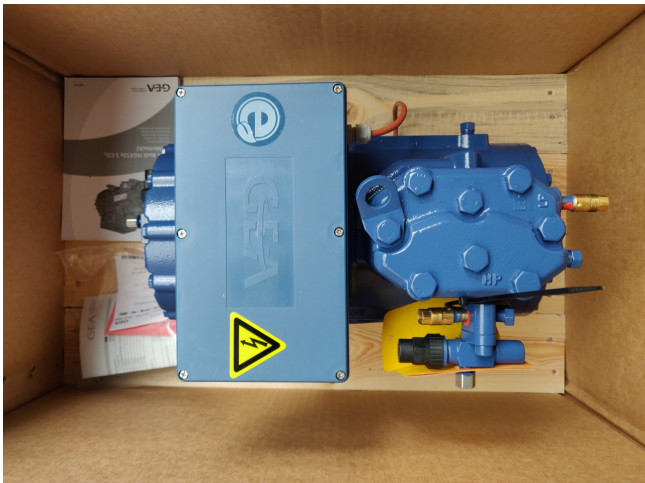

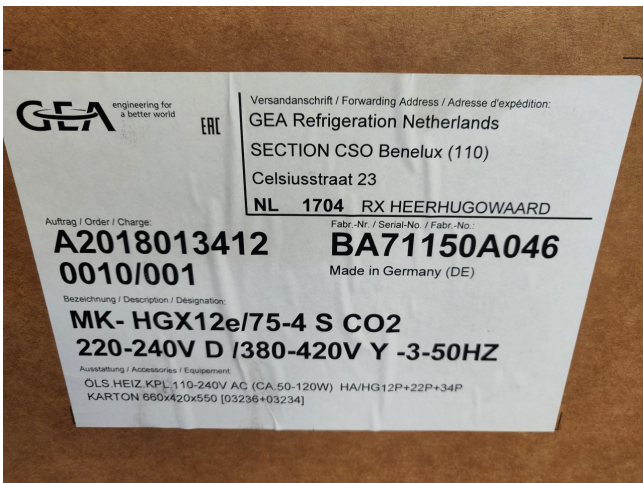

Refrigerant: R744

Subject:

Performance data table

Application: Refrigeration & AC
 Reference temperature: Dew point
 Supply frequency: 50 Hz
 Voltage: 400 V
 Suction gas superheat: 10 K
 Subcooling (outside cond.): 0 K

tc [°C]	to [°C]									
	-10.0	-15.0	-20.0	-25.0	-30.0	-35.0	-40.0	-45.0	-50.0	
-25.0	Q [W]									
	P [kW]									
	I [A]									
-20.0	Q [W]				17300	14200	11400	9020	6990	
	P [kW]				148	172	187	192	191	
	I [A]				4.70	4.88	4.99	5.04	5.03	
-15.0	Q [W]				16100	13100	10500	8230	6300	
	P [kW]				1.92	2.11	2.19	2.19	2.13	
	I [A]				5.03	5.20	5.28	5.28	5.22	
-10.0	Q [W]			18100	14900	12100	9600	7470	5630	
	P [kW]			2.11	2.36	2.49	2.51	2.45	2.32	
	I [A]			5.20	5.43	5.56	5.59	5.52	5.40	
-5.0	Q [W]		20200	16800	13700	11100	8730	6720	4990	
	P [kW]		2.30	2.62	2.80	2.86	2.81	2.69	2.49	
	I [A]		5.38	5.70	5.89	5.95	5.91	5.77	5.57	
0.0	Q [W]	22300	18600	15400	12600	10100	7880	6000	4370	
	P [kW]	2.49	2.88	3.13	3.23	3.22	3.10	2.91	2.64	
	I [A]	5.56	5.98	6.26	6.38	6.37	6.23	6.01	5.72	
5.0	Q [W]	20500	17100	14100	11500	9090	7060	5300	3780	
	P [kW]	3.16	3.47	3.64	3.67	3.57	3.38	3.10	2.76	
	I [A]	6.29	6.68	6.88	6.91	6.80	6.56	6.23	5.85	
10.0	Q [W]	18800	15600	12800	10300	8140	6270	4640		
	P [kW]	3.84	4.07	4.15	4.09	3.92	3.64	3.28		
	I [A]	7.13	7.44	7.54	7.46	7.23	6.88	6.44		
15.0	Q [W]	17000	14100	11500	9200	7220	5500			
	P [kW]	4.53	4.68	4.66	4.52	4.25	3.89			
	I [A]	8.05	8.24	8.22	8.02	7.67	7.19			

to Evaporating temperature
 tc Condensing temperature
 Q Compressor refrigeration capacity
 P Power consumption
 I Current draw