

## Delta FMC 3518

### Specifications


|                   |                           |
|-------------------|---------------------------|
| Brand             | Delta                     |
| Type              | FMC 3518                  |
| kW                | 2.63                      |
| Refrigerant       | Freon                     |
| Number of Fans    | 1                         |
| Fin Space in mm   | 7                         |
| Defrosting        | None                      |
| m <sup>3</sup> /h | 1750                      |
| Sizes             | 519x582x470 mm<br>(LxWxH) |
| Remarks           | Y.O.B. 2006               |
| Volume            | 3.6 dm <sup>3</sup>       |
| Weight            | 28kg                      |



### Description

#### Used Delta FMC 3518

Used Delta FMC 3518 evaporator build in 2006 with 1 Fan, diameter 350mm, Airflow 1750 m<sup>3</sup>/h, volume 3.6 dm<sup>3</sup>, weight 28Kg "\*Why choose for HOSBV? Were not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning. Optional we can arrange shipment and export documents."

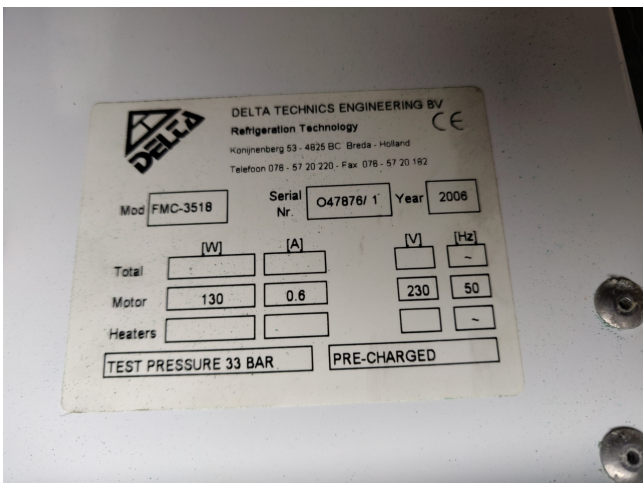

| MODEL    | VERMOGEN<br>CAPACITY |  | VENTILATOREN<br>FANS |               |               |               | ALGEMEEN<br>GENERAL |                   |                  |                       |                   |
|----------|----------------------|--|----------------------|---------------|---------------|---------------|---------------------|-------------------|------------------|-----------------------|-------------------|
|          | R404A<br>DT1 = 8K    |  | Lucht<br>Airflow     | Aantal<br>No. | Diameter<br>Ø | Worp<br>Throw | Vermogen<br>Power   | Stroom<br>Current | Inhoud<br>Volume | Oppervlakt<br>Surface | Gewicht<br>Weight |
|          | kW                   |  | m³/h                 | #             | mm            | m             | kW                  | A                 | dm³              | m²                    | kg                |
| Ø 350 mm |                      |  |                      |               |               |               |                     |                   |                  |                       |                   |
| FMC 3513 | 1,23                 |  | 2250                 | 1             | 350           | 14            | 0,14                | 0,60              | 1,3              | 6,9                   | 18                |
| FMC 3514 | 1,50                 |  | 2150                 | 1             | 350           | 14            | 0,14                | 0,60              | 1,8              | 9,2                   | 20                |
| FMC 3515 | 1,90                 |  | 2050                 | 1             | 350           | 14            | 0,14                | 0,60              | 2,2              | 11,5                  | 22                |
| FMC 3516 | 2,16                 |  | 1900                 | 1             | 350           | 14            | 0,14                | 0,60              | 2,7              | 13,8                  | 24                |
| FMC 3518 | 2,63                 |  | 1750                 | 1             | 350           | 14            | 0,14                | 0,60              | 3,6              | 18,4                  | 28                |
| FMC 3523 | 2,49                 |  | 4500                 | 2             | 350           | 14            | 0,27                | 1,20              | 2,6              | 13,1                  | 18                |
| FMC 3524 | 3,17                 |  | 4300                 | 2             | 350           | 14            | 0,27                | 1,20              | 3,6              | 18,1                  | 24                |
| FMC 3525 | 3,83                 |  | 4100                 | 2             | 350           | 14            | 0,27                | 1,20              | 4,5              | 23,0                  | 33                |
| FMC 3526 | 4,36                 |  | 3800                 | 2             | 350           | 14            | 0,27                | 1,20              | 5,4              | 27,6                  | 47                |
| FMC 3528 | 5,28                 |  | 3500                 | 2             | 350           | 14            | 0,27                | 1,20              | 7,2              | 36,8                  | 55                |
| FMC 3535 | 5,80                 |  | 6150                 | 3             | 350           | 14            | 0,41                | 1,80              | 6,8              | 34,5                  | 64                |
| FMC 3536 | 6,51                 |  | 5700                 | 3             | 350           | 14            | 0,41                | 1,80              | 8,1              | 41,4                  | 70                |
| FMC 3538 | 7,84                 |  | 5250                 | 3             | 350           | 14            | 0,41                | 1,80              | 10,8             | 55,2                  | 82                |
| FMC 3546 | 8,70                 |  | 7600                 | 4             | 350           | 14            | 0,54                | 2,40              | 10,8             | 55,2                  | 83                |
| FMC 3548 | 10,73                |  | 7000                 | 4             | 350           | 14            | 0,54                | 2,40              | 14,4             | 73,6                  | 109               |
| FMC 3556 | 11,00                |  | 9500                 | 5             | 350           | 14            | 0,68                | 3,00              | 13,5             | 69,0                  | 116               |
| FMC 3558 | 13,30                |  | 8750                 | 5             | 350           | 14            | 0,68                | 3,00              | 18,0             | 92,0                  | 136               |