

Delta MCL 48

Specifications

| Delta |
|----------------|
| MCL 48 |
| 2.6 |
| Freon |
| 2 |
| 7 |
| None |
| 1.800 |
| 1250x243x660mm |
| (LxWxH) |
| YOB 2005 |
| 4.3dm3 |
| 33kg |
| |



Description

Used Delta MCL 48

Used but still in good condition Air cooler single-sided blowing out lower overall height build by Delta type MCL 48 with 2 fans, 1.800m3/h, 4.3dm3, 33kg and YOB 2005. "*Why choose for HOSBV? Were not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning. Optional we can arrange shipment and export documents."
















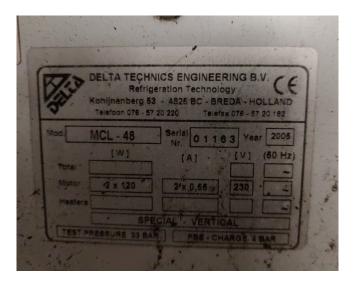



Your partner for used commercial and industrial refrigeration equipment





| MODEL | VERMOGEN | VENTILATOR | EN | | | | |
|---------|---------------|--------------------------|--------|----------|------|----------|--------|
| | R404A | Lucht | Aantal | Diameter | Worp | Vermogen | Stroom |
| | kW | m ³ /h | # | mm | m | W | Α |
| | — lamelafstar | - lamelafstand 6,35 mm - | | | | | |
| MCL 15 | 1,0 | 1050 | 1 | 300 | 8 | 120 | 0,55 |
| MCL 20 | 1,2 | 1000 | 1 | 300 | 8 | 120 | 0,55 |
| MCL 24 | 1,3 | 900 | 1 | 300 | 8 | 120 | 0,55 |
| MCL 30 | 2,1 | 2100 | 2 | 300 | 8 | 240 | 1,10 |
| MCL 40 | 2,4 | 2000 | 2 | 300 | 8 | 240 | 1,10 |
| MCL 48 | 2,6 | 1800 | 2 | 300 | 8 | 240 | 1,10 |
| MCL 60 | 3,6 | 3000 | 3 | 300 | 8 | 360 | 1,65 |
| MCL 72 | 3,9 | 2700 | 3 | 300 | 8 | 360 | 1,65 |
| MCL 80 | 4,9 | 4000 | 4 | 300 | 8 | 480 | 2,20 |
| MCL 96 | 5,3 | 3600 | 4 | 300 | 8 | 480 | 2,20 |
| MCL 120 | 6,5 | 4500 | 5 | 300 | 8 | 600 | 2,75 |
| MCL 144 | 7,2 | 5400 | 6 | 300 | 8 | 720 | 3,30 |

| MODEL | ALGEMEEN | | | AFMETINGEN | | | | | | AANSLUITINGEN | |
|---------|-----------------|----------------|---------|------------|-----|------|----------------|-----|-----|---------------|----------|
| | Inhoud | Oppervlak | Gewicht | Α | В | С | C ₁ | D | E | Intrede | Uittrede |
| | dm ³ | m ² | kg | mm | mm | mm | mm | mm | mm | | |
| | | | | | | | | | | | |
| MCL 15 | 1,4 | 3,8 | 16 | 750 | 243 | 520 | | 660 | 625 | 1/2 | 1/2 |
| MCL 20 | 1,8 | 4,8 | 17 | 750 | 243 | 520 | | 660 | 625 | 1/2 | 1/2 |
| MCL 24 | 2,2 | 5,8 | 18 | 750 | 243 | 520 | | 660 | 625 | 1/2 | 5/8 |
| MCL 30 | 2,9 | 7,6 | 29 | 1250 | 243 | 1020 | | 660 | 625 | 1/2 | 5/8 |
| MCL 40 | 3,6 | 9,6 | 31 | 1250 | 243 | 1020 | | 660 | 625 | 1/2 | 5/8 |
| MCL 48 | 4,3 | 11,6 | 33 | 1250 | 243 | 1020 | | 660 | 625 | 1/2 | 7/8 |
| MCL 60 | 5,4 | 14,6 | 45 | 1750 | 243 | 1520 | | 660 | 625 | 1/2 | 7/8 |
| MCL 72 | 6,5 | 17,2 | 48 | 1750 | 243 | 1520 | | 660 | 625 | 1/2 | 1 1/8 |
| MCL 80 | 7,2 | 19,1 | 59 | 2250 | 243 | 2020 | | 660 | 625 | 1/2 | 1 1/8 |
| MCL 96 | 8,6 | 23,2 | 63 | 2250 | 243 | 2020 | | 660 | 625 | 1/2 | 1 1/8 |
| MCL 120 | 10,8 | 29,1 | 78 | 2750 | 243 | 2520 | 1260 | 660 | 625 | 1/2 | 1 1/8 |
| MCL 144 | 13,0 | 34,9 | 93 | 3250 | 243 | 3020 | 1510 | 660 | 625 | 1/2 | 1 1/8 |