


# Bitzer 4G.2

## Specifications

|                            |                            |
|----------------------------|----------------------------|
| Marca                      | Bitzer                     |
| Tipo                       | 4G.2                       |
| Refrigerante               | Freon                      |
| kW at 0°C/+40°C            | 70,9                       |
| kW at -5°C/+40°C           | 58,7                       |
| kW at -10°C/+40°C          | 48,2                       |
| kW at -20°C/+40°C          | 31,2                       |
| kW at -30°C/+40°C          | 18,8                       |
| kW at -40°C/+40°C          | 10,1                       |
| kW at -45°C/+40°C          | 6,8                        |
| Electromotor Specs         | 50 Hz - 18,5 kW - 1460 RPM |
| Sober Bancada              | ✓                          |
| Presostatos                | ✓                          |
| Sistema de nivel de aceite | ✓                          |
| m3 / h                     | 43,7 - 102,0               |
| Tamaños                    | 1270x700x700 mm (LxWxH)    |
| Stock                      | 1                          |

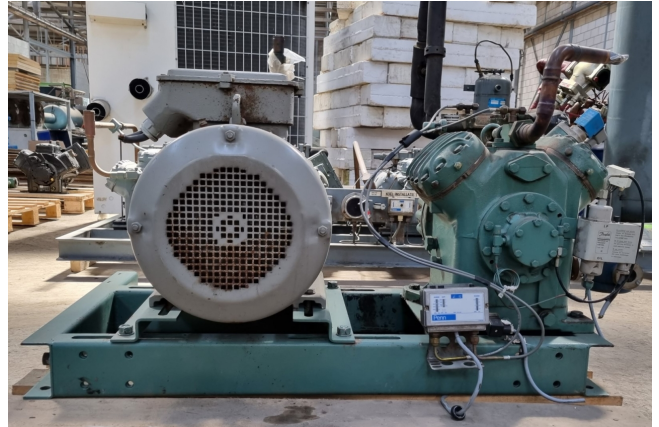

## Description

### Used Bitzer 4G.2

Used Bitzer 4G.2 open-type reciprocating compressor on Freon. Complete with a Rotor XF180M04 811X electric motor - 50 Hz - 18,5 kW - 1460 RPM, AC&R S-9110 oil level regulator and pressure and safety switches.  
 \*Why choose for HOSBV? Were not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning.  
 \*Optional we can also perform a new paint job and arrange the logistics.

