

Howden MK 4C/WRVB255/22036/269

Specifications

Marca	Howden
Tipo	MK 4C/WRVB255/22036/269
Refrigerante	NH 3 (ammonia)
kW at -5°C/+40°C	1900,0 (-10°C/-10°C)
kW at -10°C/+40°C	1750,0 (-10°C/+10°C)
kW at -20°C/+40°C	1020,0 (-20°C/+10°C)
Sober Bancada	✓
Presostatos	✓
Manómetros de Presion	✓
Separador de aceite	✓
La línea de líquido filtro secador	✓
Mirilla	✓
Package / Rack	✓
Tamaños	4550x1260x2200 mm (LxWxH)
Stock	1



Description

Used Howden MK 4C/WRVB255/22036/269


Used Howden MK 4C/WRVB255/22036/269 open-drive screw compressor unit on NH₃ (Ammonia). Complete with a Leroy Somer P P315MU-T electric motor - 50 Hz - 160/110 kW - 2980/1480 RPM, Howden T 61 oil separator with a volume of 510 liters, Hans Güntner GmbH B219/3000/1 W shel and tube heat exchanger, oil cooler, Howden 450 liquid line filter drier, Mycom M50P-M oil pump with F-part FMS90L1-2 electro motor - 50/60 Hz - 2,2/2,64 kW - 2840/3400 RPM and pressure safety switches/gauges.



*Why choose for HOSBV? We are not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment solely if it has



passed our extensive test. Warranty and industrial cleaning are included in your purchase. *If requested we are happy to arrange your shipment.



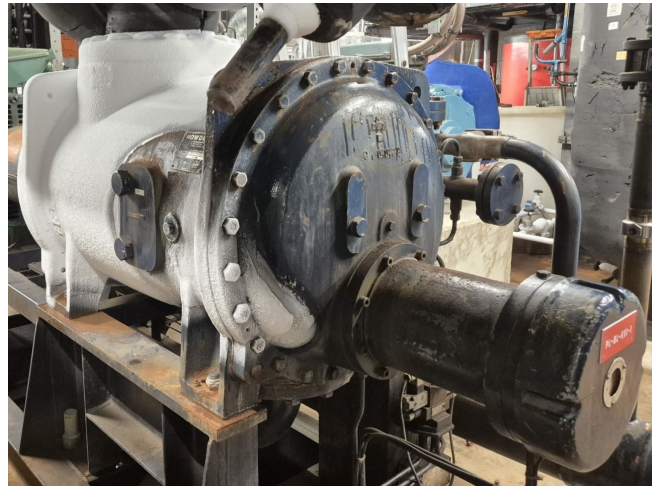

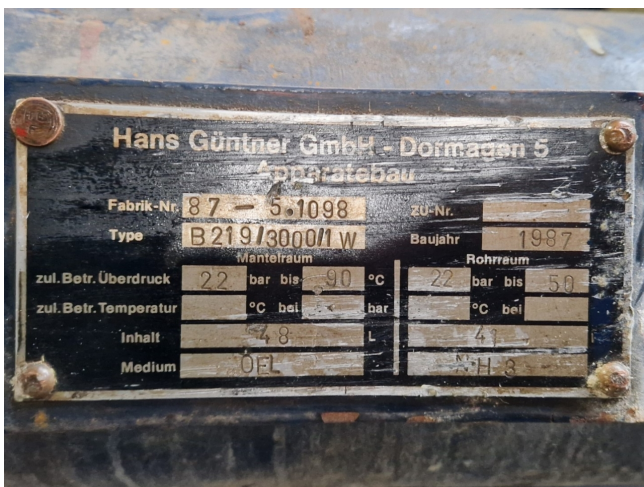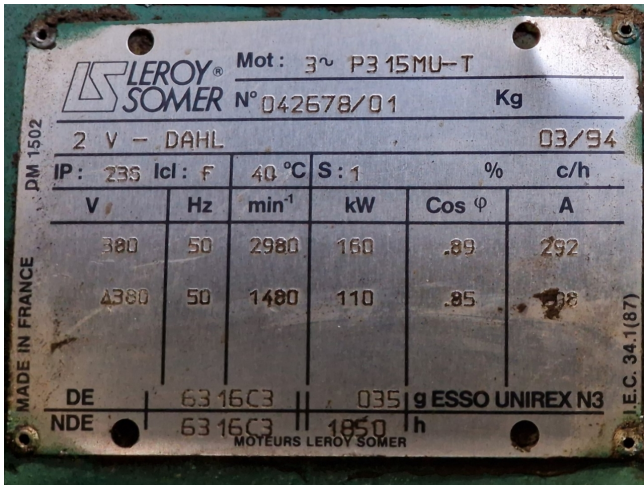



F part		F part		CE	
Type: FMS90L1-2	Ins.cl.F	IP 55	kg. 15	Pos. 2	
V	Hz	Rpm	kW	A	Cos ϕ
230 Δ	50	2840	2.2	8.02	0.85
400 Y	50	2840	2.2	4.61	0.85
277 Δ	60	3400	2.64	8.02	0.85
480 Y	60	3400	2.64	4.61	0.85
S/No. 14 15 10 10 19			www.f-part.com		S1



HOWDEN ANBERGEN B.V.		H	
POSTFACH 10-7470 AALGHOOR NIEDERLANDE			
MEDIUM	R403	TYPE	20
BAUJAHR	1987	FABRIK NR.	1369
ZUL. BETRIEBSUEBERDRUCK	18	BAR BIS	+100 °C
BETRIEBSTEMP.	-25 °C	BEI	0.37 BAR
INHALT	66 L		
ENTWURF	AD MERKBLÄTTER		

