

Helpman LEX 26 E

Specifications


Marca	Helpman
Tipo	LEX 26 E
Capacidad kW	22.8
Refrigerante	Freon
Número de aficionados	3
Fan del Espacio in mm	7
Descongelación	Electric
m ³ /h	14 000
Tamaños	2650x850x750 mm (LxWxH)
Comentarios	Fan: 0,25 kW / 1410 RPM / Ø = 500 mm
Remarks	mix also with hot gas
Stock	12



Description

Used Helpman LEX 26 E

Used Helpman LEX 26-E (H) blow trough unit coolers with electric defrosting and with hot gas. **All components of this used evaporator will be tested on good working, leak free condition (electro engines), coils, bearings) Choosing HOSBV means buying with warranty. We perform a industrial cleaning and rust spots will be covered. Also, we can arrange your shipment.

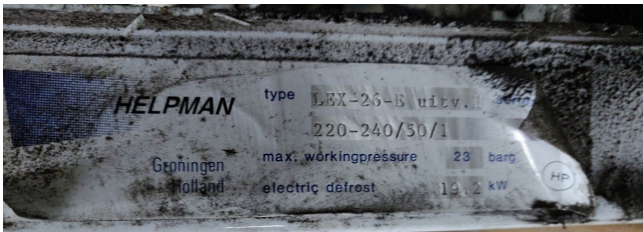

Fans / Electric Defrost												
Fans 50 Hz												
Cooler type	number	dia- meter mm	air volume		air ² throw mm	sound ³ level dB(A)	fan power		Electric defrost		defrost power ⁵ kW	
			fin spacing 4 mm	7 mm			nominal ¹ / absorbed ⁴ W	W	number of elements	coil dripray		reduced kW
LEX 2-*	1	254	1030	1060	10	48	30/80	30/85	1	1	1.28	-
LEX 4-*	1	305	1420	1500	12	50	30/100	30/100	1	1	1.76	-
LEX 6-*	1	356	2490	2620	15	53	70/160	90/145	2	1	2.64	-
LEX 8-*	1	356	2490	2620	15	53	30/100	30/100	1	1	3.2	-
LEX 10-*	2	305	2970	3130	15	53	30/100	30/100	2	1	4.8	-
LEX 12-*	2	305	2860	3010	15	53	30/100	30/100	2	1	4.8	-
LEX 14-*	1	406	3360	3540	15	57	70/230	90/215	5	1	4.5	3.4
LEX 16-*	1	457	4430	4660	20	60	220/380	250/400	5	1	6.0	4.5
LEX 18-*	2	356	4980	5240	20	56	70/160	90/145	2	1	5.4	-
LEX 20-*	2	406	6730	7080	20	60	70/230	90/215	5	1	8.4	6.3
LEX 22-*	2	457	8650	9320	20	63	220/380	250/400	5	1	13.2	9.9
LEX 24-*	2	508	11000	11600	20	66	220/430	250/480	5	1	19.2	14.4
LEX 26-*	3	457	13050	14000	20	65	220/380	250/400	5	1	19.2	14.4
LEX 28-*	3	508	16600	17500	20	68	220/430	250/480	5	1	19.2	14.4
LEX 30-*	4	508	22200	23400	20	69	220/430	250/480	10	2	24.0	18.0

Fin spacing 7 mm						
LEX 2-7	1.3	1.2	1.3	1.1	1.0	1.2
LEX 4-7	1.7	1.4	1.7	1.5	1.2	1.4
LEX 6-7	2.5	2.2	2.5	2.2	1.9	2.2
LEX 8-7	4.1	3.7	4.3	3.6	3.3	3.7
LEX 10-7	3.7	3.6	4.0	3.2	3.2	3.5
LEX 12-7	5.0	4.9	5.3	4.4	4.3	4.6
LEX 14-7	5.5	5.5	6.0	4.8	4.8	5.2
LEX 16-7	7.4	7.3	8.0	6.4	6.3	7.0
LEX 18-7	8.5	7.8	8.8	7.4	6.8	7.6
LEX 20-7	11.4	10.0	11.4	9.9	8.7	9.9
LEX 22-7	14.5	12.4	14.3	12.6	10.7	12.4
LEX 24-7	18.1	15.6	17.8	15.7	13.5	15.5
LEX 26-7	22.8	21.2	23.4	19.8	18.4	20.4
LEX 28-7	28.5	26.5	29.3	24.8	23.0	25.5
LEX 30-7	36.5	31.0	35.9	31.7	27.0	31.2

