

Bock HGX12e/75-4 S

Specifications



Marca	Bock
Tipo	HGX12e/75-4 S
Refrigerante	CO2
kW at -10°C/+40°C	17.0
kW at -20°C/+40°C	14.10
kW at -30°C/+40°C	9.20
kW at -40°C/+40°C	5.5
Comentarios	Capacity at 15°C condensing temp
Comentarios	17.0 kW at -15°C/+15°C
Comentarios	New in box never been used
Stock	1




Description

Used Bock HGX12e/75-4 S

Still new in the box, Bock HGX12e/75-4 S CO2 reciprocating compressor. *Why choose for HOSBV? Were not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning. Optional we can arrange the logistics.

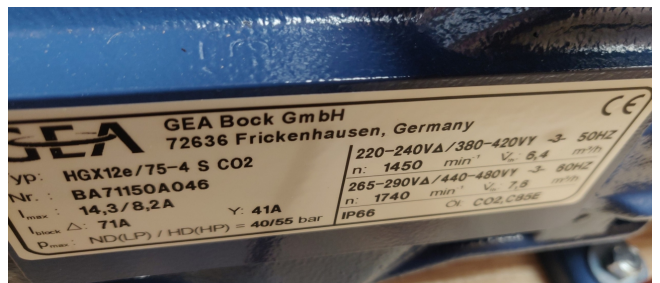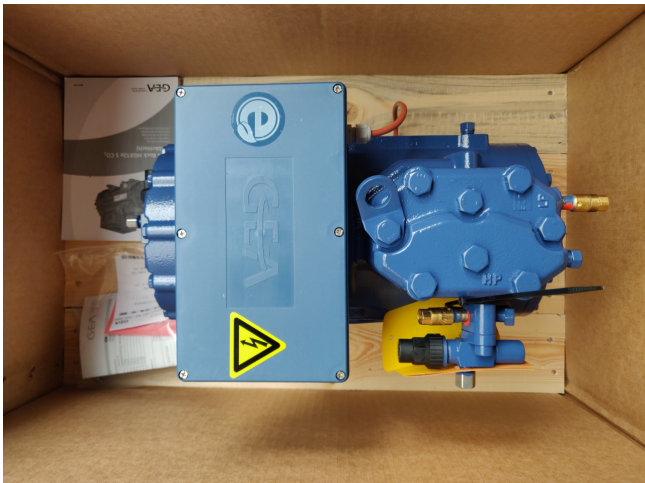

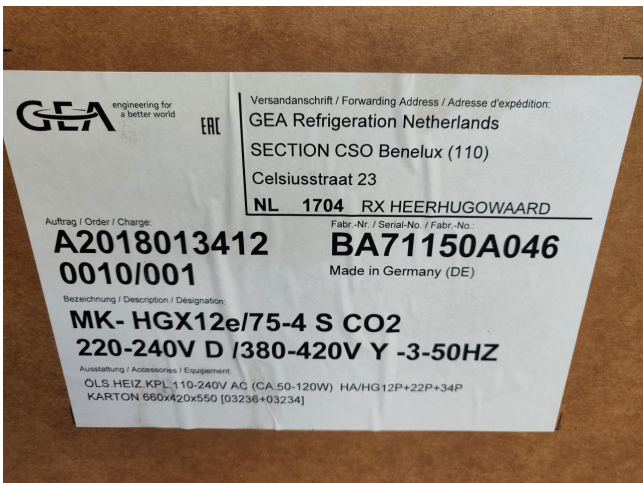

Refrigerant: R744

Subject:

Performance data table

Application: Refrigeration & AC
 Reference temperature: Dew point
 Supply frequency: 50 Hz
 Voltage: 400 V
 Suction gas superheat: 10 K
 Subcooling (outside cond.): 0 K

tc [°C]	to [°C]									
	-10.0	-15.0	-20.0	-25.0	-30.0	-35.0	-40.0	-45.0	-50.0	
-25.0	Q [W] P [kW] I [A]									
-20.0	Q [W] P [kW] I [A]				17300 4.70	14200 4.88	11400 4.99	9020 5.04	6990 5.03	
-15.0	Q [W] P [kW] I [A]				16100 1.92	13100 2.11	10500 2.19	8230 2.19	6300 2.13	
-10.0	Q [W] P [kW] I [A]				18100 2.11	14900 2.36	12100 2.49	9600 2.51	7470 2.45	5630 2.32
-5.0	Q [W] P [kW] I [A]			20200 2.30	16800 2.62	13700 2.80	11100 2.86	8730 2.81	6720 2.69	4990 2.49
0.0	Q [W] P [kW] I [A]		22300 2.49	18600 2.88	15400 3.13	12600 3.23	10100 3.22	7880 3.10	6000 2.91	4370 2.64
5.0	Q [W] P [kW] I [A]		20500 3.16	17100 3.47	14100 3.64	11500 3.67	9090 3.57	7060 3.38	5300 3.10	3780 2.76
10.0	Q [W] P [kW] I [A]		18800 3.84	15600 4.07	12800 4.15	10300 4.09	8140 3.92	6270 3.64	4640 3.28	
15.0	Q [W] P [kW] I [A]		17000 4.53	14100 4.68	11500 4.66	9200 4.52	7220 4.25	5500 3.89		

to Evaporating temperature
 tc Condensing temperature
 Q Compressor refrigeration capacity
 P Power consumption
 I Current draw