

Bitzer 2FC-2.2Y-40S (x1) & 2KC-05.2Y-40S (x1) Water-cooled condensing unit

Specifications

Marque	Bitzer
Le type	2FC-2.2Y-40S (x1) & 2KC-05.2Y-40S (x1) Water-cooled condensing unit
Réfrigérant	Freon
Refrigerant type	R134a
kW at +10°C/+40°C	9,7*
kW at 0°C/+40°C	6,4*
kW at -5°C/+40°C	5,1*
kW at -10°C/+40°C	4,0*
kW at -20°C/+40°C	2,3*
Sur le châssis en acier	✓
Interrupteurs de sécurité de pression	✓
Manomètres	✓
Liquid déshydrateur	✓
ligne	
Voyant	✓
m3 / h	13,6
Remarques	Y.o.b. 2012 (s.nr: 1682201507), y.o.b. 2005 (s.nr: 1269001709)




	Freon type: R134a
Refrigerant	*Capacity based on
Tailles	950x800x1300 mm (LxWxH)
Stock	1

Description

Used Bitzer 2FC-2.2Y-40S (x1) & 2KC-05.2Y-40S (x1) Water-cooled condensing unit

Used Bitzer water-cooled condensing unit on Freon. Complete with a Bitzer 2FC-2.2Y-40S (x1) & 2KC-05.2Y-40S (x1) semi-hermetic compressors, 2 Bitzer K073H shell and tube condensers, 2 liquid line filter driers, pressure and safety switches/gauges, sight glasses and a control cabinet with a 2 displays. The compressors have a displacement of 13,6 m³/h at 50 Hz. *Why choose for HOSBV? Were not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and deliver after an industrial cleaning. *If requested we are happy to arrange your logistics.



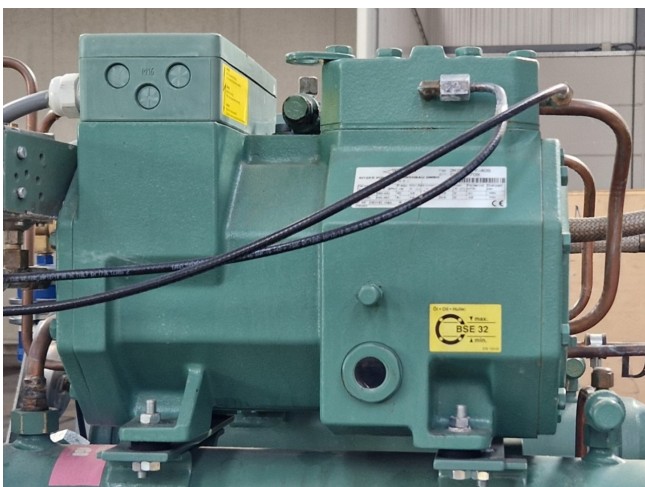

Typ 2KC-05.2Y-40S
SN: 1269001709

BITZER KÜHLMASCHINENBAU GMBH
Made in E.C.

Nennspannung V A 3Ph~	V Y 3Ph~	Frequ Hz	Max Betrstrom A (Δ)	A (Y)	Anlaufstrom A (Δ)	A (Y)	Fördervol m³/h	Drehzahl min⁻¹
220-240	380-420	50	4,6	2,7	20,8	12	4,1	1450
265-290	440-480	60	4,6	2,7	20,8	12	4,9	1750

P 65 ND/HD max. 19 / 28 bar

17802801

CE

