

Bock F5

Specifications

Marque	Bock
Le type	F5
Réfrigérant	Freon
kW at +10°C/+40°C	83.33
kW at 0°C/+40°C	59.40
kW at -5°C/+40°C	49.15
kW at -10°C/+40°C	40.01
kW at -20°C/+40°C	24.94
kW at -30°C/+40°C	13.98
kW at -40°C/+40°C	6.89
kW at -45°C/+40°C	4.72
Sur le châssis en acier	✓
Interrupteurs de sécurité de pression	✓
Manomètres	✓
Réservoir de liquide	✓
Réservoir de liquide ltr.	39
Liquid déshydrateur ligne	✓
Voyant	✓
Remarques	# // Electromotor: 15 (3x) 16 (1x) kW / 1445 (3x) 1455 (1x) RPM // Pulley EM: 180 // Compr: 230
Remarques	R404a - R22 or other freon types






Package / Rack	✓
Tailles	1200x1100x1300 mm (LxWxH)
Stock	4



Description

Used Bock F5

Used Bock F5 freon compressor rack, complete with pressure safety switches, pressure gauges, liquid line filter drier, sight glass and liquid receiver with a volume of 39 liters.

Why choose for HOSBV? We're not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and deliver after an industrial cleaning. *If requested we are happy to arrange your logistics.

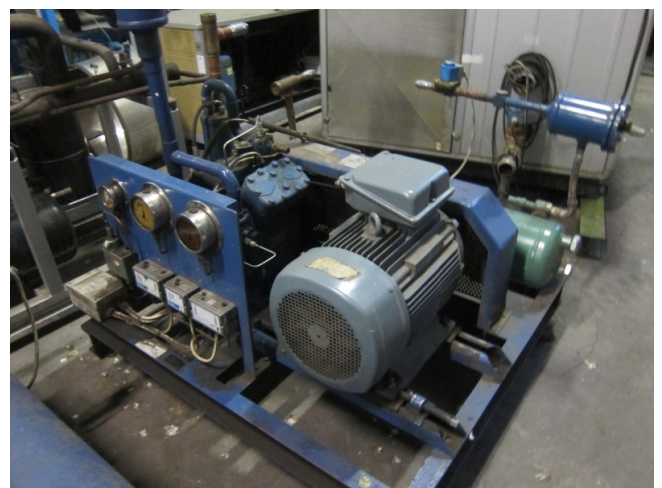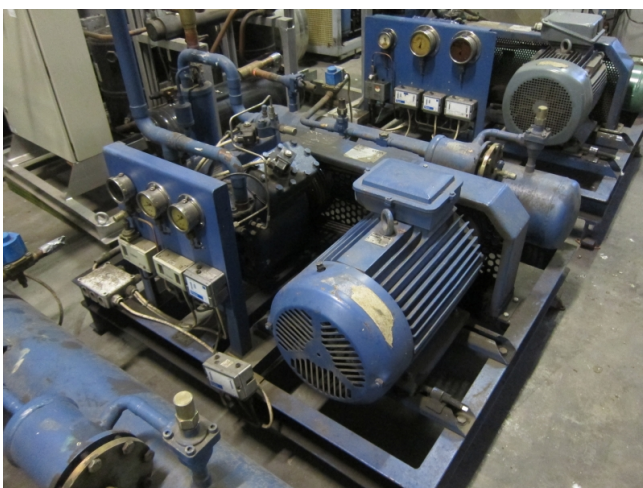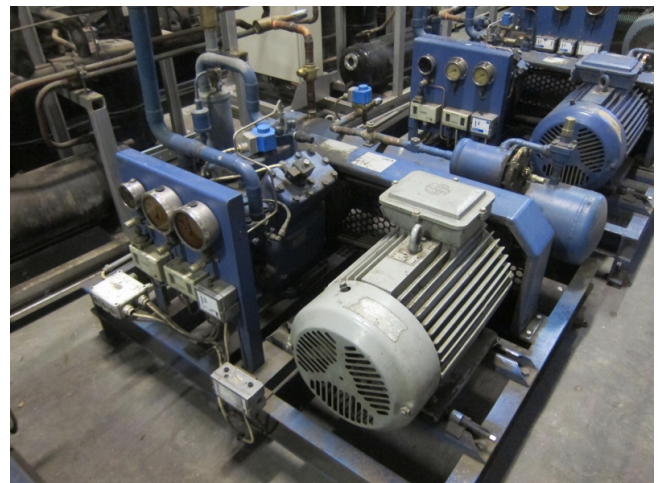

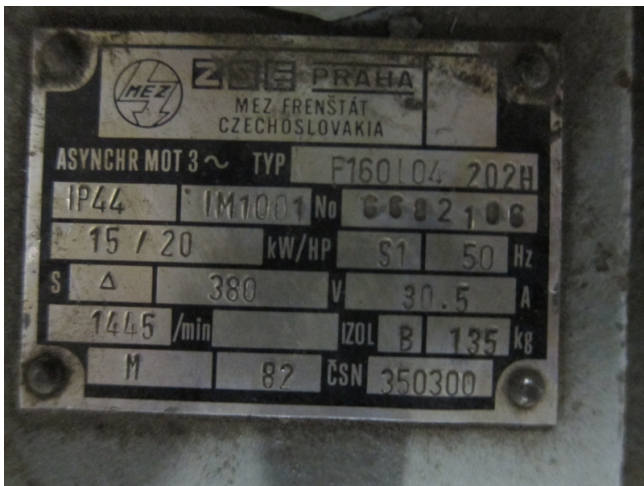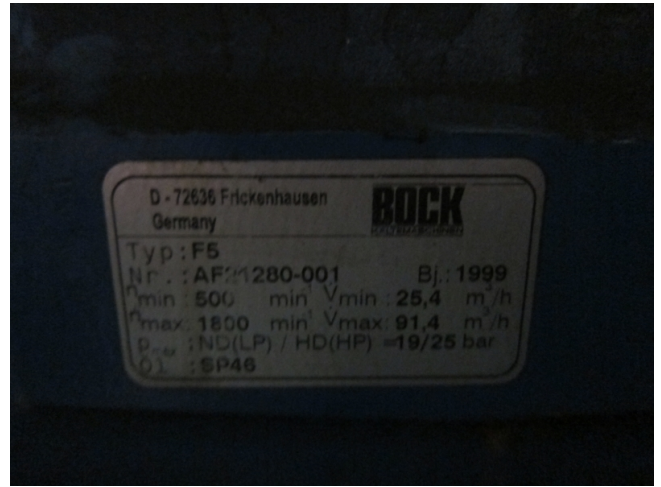

R404A/R507		Performance data											1.450 rpm														
Type	Cond. temp. °C	Cooling capacity \dot{Q}_c [W]											Power P [kW]														
		10	5	0	-5	-10	-15	-20	-25	-30	-35	-40	-45	10	5	0	-5	-10	-15	-20	-25	-30	-35	-40	-45		
FX2	30	Q	13423	11418	9621	8020	6606	5366	4290	3366	2584	1933	1402	979	P	2,21	2,19	2,13	2,05	1,94	1,80	1,65	1,48	1,31	1,12	0,94	0,75
	40	Q	11561	9785	8201	6797	5562	4485	3555	2761	2092	1537	1085	724	P	2,65	2,56	2,44	2,30	2,13	1,95	1,76	1,55	1,34	1,12	0,91	0,70
	50	Q	9652	8113	6749	5548	4500	3593	2816	2159	1609	1157	791	P	3,03	2,88	2,71	2,51	2,30	2,07	1,83	1,59	1,34	1,10	0,86	0,66	
FX3	30	Q	28402	24165	20377	17011	14041	11442	9187	7251	5608	4231	3096	2175	P	3,52	3,37	3,24	3,03	2,86	2,64	2,37	2,08	1,76	1,56	1,30	1,07
	40	Q	24498	20763	17437	14495	11911	9657	7710	6042	4628	3442	2458	1650	P	4,97	4,85	4,66	4,41	4,11	3,77	3,40	3,01	2,61	2,21	1,83	1,46
	50	Q	20984	17356	14498	11985	9791	7889	6254	4860	3680	2690	1862	P	5,90	5,62	5,28	4,89	4,47	4,02	3,56	3,08	2,61	2,15	1,72	1,30	
FX4	30	Q	53909	45826	38585	32117	26393	21373	17019	13292	10151	7559	5476	3862	P	8,34	8,30	8,09	7,73	7,23	6,68	6,04	5,36	4,66	3,96	3,29	2,69
	40	Q	46772	39538	33069	27326	22270	17862	14063	10834	8135	5928	4173	2832	P	10,09	9,75	9,27	8,67	7,98	7,21	6,41	5,59	4,78	4,00	3,27	2,63
	50	Q	39157	32814	27179	22214	17880	14137	10946	8268	6054	4295	2922	P	11,44	10,83	10,10	9,28	8,40	7,47	6,53	5,59	4,69	3,85	3,09	2,42	
FX5	30	Q	99054	81844	66053	51954	42020	34922	28933	23624	17768	12938	9105	6242	P	12,98	13,48	13,55	13,24	12,62	11,75	10,69	9,49	8,22	6,94	5,70	4,57
	40	Q	82230	70884	58401	46154	37925	30849	24963	19961	14961	10961	7961	5961	P	15,87	15,64	15,05	14,03	12,72	11,28	9,79	8,29	6,85	5,53	4,39	3,42
	50	Q	70427	59251	49183	40194	32258	25345	19428	14480	10472	7377	5168	P	20,21	19,31	18,12	16,70	15,11	13,41	11,67	9,93	8,26	6,73	5,38	4,29	
FX14/1166	30	Q	131605	112604	95281	79598	65318	53000	42008	32503	24447	17801	12327	8587	P	17,86	18,55	18,64	18,22	17,37	16,17	14,71	13,06	11,32	9,55	7,85	6,59
	40	Q	114050	97588	81127	67628	55054	43966	34506	26099	19237	13711	9460	6506	P	23,21	22,89	22,08	20,86	19,30	17,49	15,52	13,47	11,41	9,43	7,61	6,04
	50	Q	96896	81531	67668	55301	44382	34871	26720	19922	14468	10150	7110	P	27,80	26,56	25,92	24,97	23,79	21,45	18,65	16,05	13,66	11,37	9,25	7,40	
FX14/1366	30	Q	154448	132149	111819	93414	76889	62199	49299	38144	28690	20890	14701	10078	P	20,96	21,77	21,87	21,38	20,38	18,98	17,26	15,33	13,28	11,21	9,21	7,38
	40	Q	134550	114291	95912	79366	64609	51997	40284	30623	22575	16091	11125	7635	P	25,12	24,21	23,44	22,28	20,72	18,72	16,65	14,46	12,26	10,06	8,06	6,40
	50	Q	114050	97588	81127	67628	55054	43966	34506	26099	19237	13711	9460	6506	P	29,12	27,91	27,01	25,61	23,79	21,57	19,06	16,36	13,96	11,76	9,76	7,96