

Helpman LEX-10-7

Specifications


La marque	Helpman
Type	LEX-10-7
Capacité kW	4
Réfrigérant	Freon
Nombre de ventilateurs	2
Espace Fan in mm	7
Dégivrage	None
m ³ /h	3.130
Tailles	1106x920x495mm (LxWxH)
Remarques	4kW at 8K // based on R404A
Volume	6 dm ³
Poids	32kg
Stock	1



Description

Used Helpman LEX-10-7

Used helpman LEX 10-7 · Size: 1106x920x495mm (LxWxH) · Weight: 32Kg · Fin space: 7 · m³/h: 3.130 · Fans: 2 · Hertz fans: 50Hz · refrigerant R404A · **All components of this used evaporator will be tested on good working, leak free condition (electro engines), coils, bearings) Choosing HOSBV means buying with warranty. We perform a industrial cleaning and rust spots will be covered. Also, we can arrange your shipment.

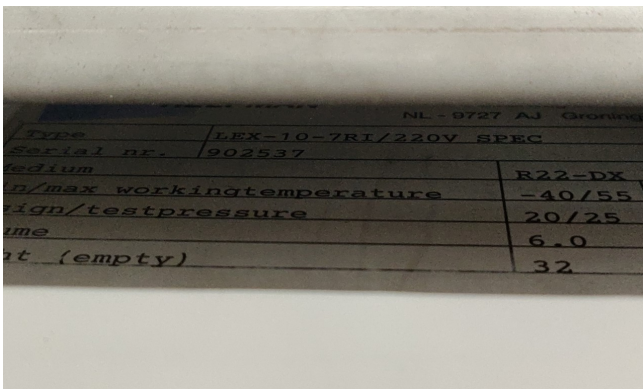

Cooler type	Dimensions mm							Shipp. vol. m ³	Cooler weight		Coil surface		Int. vol. dm ³	Refrig. conn.	
	A	B	D	F	G	H	K		kg	kg	4 mm	7 mm		inlet	suction
LEX 2-*	588	412	465	385	-	360	380	0.3	18	17	7.7	4.7	2.1	1/2"	1/2"
LEX 4-*	658	472	495	395	-	430	440	0.3	22	21	11.2	6.7	3.0	1/2"	1/2"
LEX 6-*	658	472	505	503	-	430	440	0.3	27	25	16.8	10.1	4.0	1/2"	1/2"
LEX 8-*	738	602	640	503	-	505	570	0.6	38	35	26.1	15.7	6.0	1/2"	22 mm
LEX 10-*	1116	760	646	556	-	430	440	0.3	38	32	22.4	13.6	6.8	1/2"	22 mm
LEX 12-*	1106	820	605	503	-	430	440	0.5	42	38	33.6	20.2	8.0	1/2"	22 mm
LEX 14-*	970	892	710	520	38	600	660	0.6	50	46	35.2	21.2	8.0	1/2"	28 mm
LEX 16-*	1110	790	750	500	35	675	750	0.7	65	61	46.4	27.8	10.4	1/2"	28 mm
LEX 18-*	1490	1180	690	500	35	550	1140	1.0	71	65	52.2	31.4	11.6	1/2"	35 mm
LEX 20-*	1640	1300	710	500	35	600	1320	1.3	85	88	70.5	42.4	15.5	1/2"	35 mm
LEX 22-*	1880	1560	750	520	35	675	1500	1.7	120	111	92.8	55.9	20.4	1/2"	42 mm
LEX 24-*	1880	1560	630	110	825	1520	2.2	139	128	116.0	69.8	28.2	1/2"	42 mm	
LEX 26-*	2650	2328	750	500	35	675	2290	2.3	172	159	139.8	84.2	30.9	1/2"	54 mm
LEX 28-*	2650	2328	920	630	110	825	2290	3.0	202	186	174.7	105.2	39.8	1/2"	54 mm
LEX 30-*	3420	3096	920	630	110	825	3000	3.9	278	256	232.7	145.1	51.1	1/2"	54 mm

Cooler type	Fans 50 Hz		air volume		air ² throw m	sound ³ level dB(A)	fan power		Electric defrost		defrost power ⁵ kW
	num-ber	dia- meter mm	4 mm fin spacing m ³ /h	7 mm fin spacing m ³ /h			nominal 220V/1 W	absorbed 380V/3 W	number of elements	coil display	
LEX 2-*	1	254	1600	1060	10	46	30/60	30/65	1	1	1.28
LEX 4-*	1	305	1490	1570	12	50	30/100	30/100	1	1	1.78
LEX 6-*	1	305	1490	1500	12	50	30/100	30/100	2	1	2.64
LEX 8-*	1	356	2490	2920	15	53	70/160	90/145	2	1	3.5
LEX 10-*	2	305	2970	3130	15	53	30/100	30/100	1	1	3.2
LEX 12-*	2	305	2950	3070	15	53	30/100	30/100	2	1	4.8
LEX 14-*	1	406	3360	3540	15	57	70/230	90/215	5	1	4.5
LEX 16-*	1	457	4430	4660	20	60	220/380	250/400	5	1	6.0
LEX 18-*	2	356	4980	5240	20	55	70/160	90/145	2	1	5.4
LEX 20-*	2	406	6730	7080	20	60	70/230	90/215	5	1	8.4
LEX 22-*	2	457	6650	8320	20	63	220/380	250/400	5	1	13.2
LEX 24-*	2	508	11000	11600	20	66	220/430	250/480	5	1	13.2

LEX

Blow Through Unit Coolers 1.5 - 40 kW LEX

Cooler type	Nominal Capacities (kW)		For reference only dry conditions DT ₁	
	R 22 frosted DT ₁	R 134a frosted DT ₁	R 404A frosted DT ₁	R 22 R 134a R 404A
Fin spacing 4 mm				
LEX 2-4	1.5	1.3	1.5	1.3 1.1 1.3
LEX 4-4	1.9	1.5	1.8	1.7 1.3 1.6
LEX 6-4	2.8	2.4	2.8	2.4 2.1 2.5
LEX 8-4	4.7	4.1	4.7	4.1 3.5 4.1
LEX 10-4	4.7	4.4	4.8	4.1 3.8 4.2
LEX 12-4	5.9	5.6	6.2	5.1 4.9 5.4
LEX 14-4	6.5	6.4	7.1	5.7 5.6 6.2
LEX 16-4	8.7	8.4	9.3	7.5 7.3 8.1
LEX 18-4	9.7	8.7	9.9	8.5 7.6 8.6
LEX 20-4	12.8	10.8	12.7	11.2 9.4 11.0
LEX 22-4	16.1	13.0	15.4	14.0 11.3 13.4
LEX 24-4	20.0	16.1	19.2	17.4 14.0 16.7
LEX 26-4	26.0	23.0	26.0	22.6 20.0 22.6
LEX 28-4	32.8	29.0	33.2	28.5 25.2 28.9
LEX 30-4	40.3	32.5	38.6	35.0 28.3 33.4
Fin spacing 7 mm				
LEX 2-7	1.3	1.2	1.3	1.1 1.0 1.2
LEX 4-7	1.7	1.4	1.7	1.5 1.2 1.4
LEX 6-7	2.5	2.2	2.5	2.2 1.9 2.2
LEX 8-7	4.1	3.7	4.3	3.6 3.3 3.7
LEX 10-7	3.7	3.6	4.0	3.2 3.2 3.6
LEX 12-7	5.0	4.9	5.3	4.4 4.3 4.6
LEX 14-7	5.5	5.5	6.0	4.4 4.8 5.2
LEX 16-7	7.4	7.3	8.0	6.4 6.3 7.0
LEX 18-7	8.5	7.8	8.8	7.4 6.8 7.6
LEX 20-7	11.4	10.0	11.4	9.9 8.7 9.9
LEX 22-7	14.5	12.4	14.2	12.9 10.7 12.4
LEX 24-7	18.1	15.6	17.8	15.7 13.5 15.5
LEX 26-7	22.8	21.2	23.4	19.8 16.4 20.4
LEX 28-7	28.5	26.5	29.3	24.8 23.0 25.5
LEX 30-7	36.5	31.0	35.9	31.7 27.0 31.2