

# Baltimore VXC 166 R

## Specifications



La marque	Baltimore
Le type	VXC 166 R
Type de produit	Evaporating Condenser
Capacité kW	716
Nombre de ventilateurs	3
Réfrigérant	NH 3 / Freon
Le débit d'air in m <sup>3</sup> /h	56.880
Stock	1



## Description

### Used Baltimore VXC 166 R

Used Baltimore VXC 166r Evaporating condenser and cooling tower. Number of fans: 3, m<sup>3</sup>/h - 56.880, For all the other specs, see the picture of the manufacturer model plate or the attached pdf file (if available) \*Why choose for HOSBV? Were not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning. \*Optional we can also perform a new paint job and arrange the logistics.

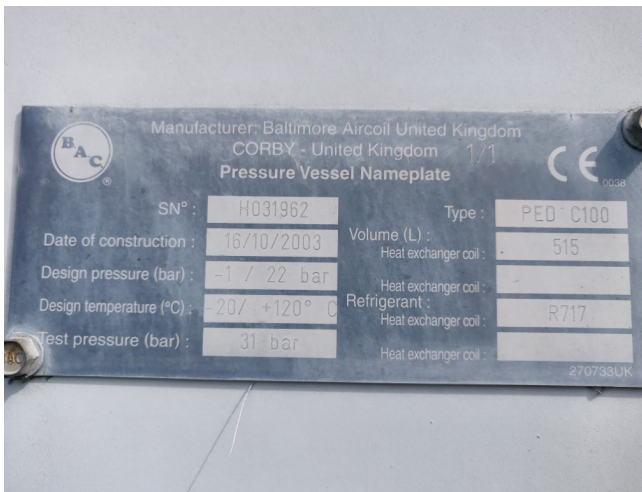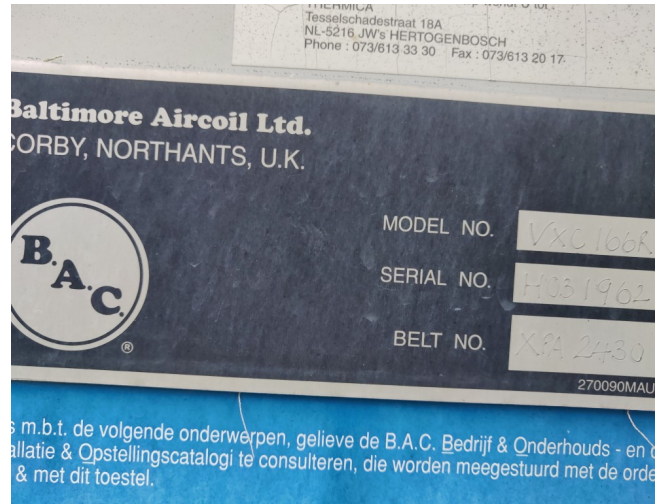

MODEL VXC	WYDAJNOŚĆ (kW) NOMINALNÍ VÝKON (kW)	MODEL VXC	WYDAJNOŚĆ (kW) NOMINALNÍ VÝKON (kW)
14	61	S455	1961
18	78	S482	2077
25	108	495	2133
28	121	S504	2172
36	156	516	2223
45	194	562	2422
52	225	S576	2482
59	250	S600	2585
65	281	620	2672
72	311	S656	2826
86	371	680	2930
97	418	S700	3016
110	474	714	3076
125	539	715	3081
135	582	772	3326
150	647	798	3438
166	716	804	3464
185	798	S806	3473
205	884	S858	3697
221	953	908	3912
250	1078	S910	3921
265	1142	S964	4153
S288	1241	990	4265
S300	1293	S1010	4352
S328	1413	1032	4446
S350	1508	1124	4843
357	1538	1240	5343
399	1719	1360	5862
S403	1737	1430	6161
S429	1849	1544	6652
454	1956	1608	6928



# Your partner for used commercial and industrial refrigeration equipment

Model	Operating Weight (kg)	Shipping Weight (kg)	Heaviest Section Coil (kg)	Air Flow (m³/h)	Fan Motor (kW)	Water Flow (l/s)	Pump Motor (kW)	R717 Charge (kg)	L (mm)	W (mm)	H (mm)
VXC 14	660	600	580*	2.3	(1x) 1.5	2.2	(1x) 0.25	9	914	1207	2035
VXC 18	740	670	600*	2.2	(1x) 1.5	2.2	(1x) 0.25	11	914	1207	2245
VXC 25	830	760	680	2.5	(1x) 2.2	2.2	(1x) 0.25	15	914	1207	2467
VXC 38	950	830	540	2.4	(1x) 2.2	2.2	(1x) 0.25	19	914	1207	2683
VXC 38	1050	920	820*	4.8	(1x) 4.0	4.7	(1x) 0.37	16	1829	1207	2035
VXC 45	1170	1030	1030*	5.0	(1x) 4.0	4.7	(1x) 0.37	20	1829	1207	2245
VXC 52	1310	1180	700	4.8	(1x) 4.0	4.7	(1x) 0.37	29	1829	1207	2467
VXC 59	1330	1180	700	5.3	(1x) 5.5	4.7	(1x) 0.37	29	1829	1207	2467
VXC 65	1500	1330	860	5.5	(1x) 5.5	4.7	(1x) 0.37	36	1829	1207	2683
VXC 72	1810	1490	1000	5.8	(1x) 4.0	7.1	(1x) 0.75	41	2737	1207	2578
VXC 86	1820	1500	1000	7.5	(1x) 7.5	7.1	(1x) 0.75	41	2737	1207	2578
VXC 97	2080	1730	1200	7.1	(1x) 7.5	7.1	(1x) 0.75	50	2737	1207	2813
VXC 110	2240	1800	1200	10.4	(1x) 7.5	9.5	(1x) 0.75	59	3658	1207	2578
VXC 125	2510	2050	1440	9.9	(1x) 7.5	9.5	(1x) 0.75	66	3658	1207	2813
VXC 135	2540	2080	1440	10.9	(1x) 11.0	9.5	(1x) 0.75	73	3658	1207	2813
VXC 150	3210	2640	1720	13.3	(1x) 7.5	13.9	(1x) 1.6	77	3645	1438	3093
VXC 165	3240	2670	1720	15.0	(1x) 11.0	13.9	(1x) 1.6	77	3645	1438	3093
VXC 185	3670	2950	1950	15.7	(1x) 11.0	13.9	(1x) 1.5	104	3645	1438	3328
VXC 205	3980	3255	2340	16.9	(1x) 15.0	13.9	(1x) 1.5	111	3645	1438	3563
VXC 221	5860	4250	2830	21.9	(1x) 15.0	19.2	(1x) 2.2	109	3550	2397	3585
VXC 250	6390	4770	3150	21.2	(1x) 15.0	19.2	(1x) 2.2	145	3550	2397	3820
VXC 265	6435	4815	3150	22.7	(1x) 18.5	19.2	(1x) 2.2	145	3550	2397	3820

\* Unit normally ships in one piece.