


Goedhart DVS 41454

Specifications

La marque	Goedhart
Type	DVS 41454
Capacité kW	7,8
Réfrigérant	Freon
Nombre de ventilateurs	1
Espace Fan in mm	4
Dégivrage	None
Double sortie	✓
m ³ /h	4160
Tailles	1030x1300x500 mm
Remarques	Y.o.b. 1997
Remarks	Surface 52 m ²
Volume	14 dm ³
Poids	83 kg
Stock	3

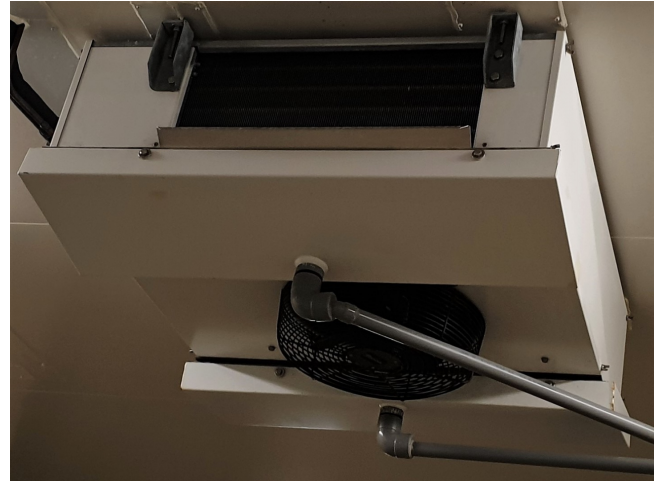

Description


Used Goedhart DVS 41454

Dubble discharge Goedhart DVS 41454 evaporator. Min. workingtemp. -5°C max. 43°C. *All components of this used evaporator will be tested on good working, leak free condition (electro engines), coils, bearings) Choosing HOSBV means buying with warranty. We perform a industrial cleaning and rust spots will be covered. Also, we can arrange your shipment.



DVS 4mm Technical data

Type DVS	34400V-50H-4pole (1500 mini rooms)				34400V-50H-4pole (1500 mini rooms)				Dimensions						Connections				
	1500V		3000V		1500V		3000V		L	B	H	E1	E2	E3	E4	In	out	Hot gas	N _W
	DT ₁ & K (C2) A ₁ max °C	A ₁ volume m ³ /h	DT ₁ & K (C2) A ₂ max °C	A ₂ volume m ³ /h	DT ₁ & K (C2) A ₁ max °C	A ₁ volume m ³ /h	DT ₁ & K (C2) A ₂ max °C	A ₂ volume m ³ /h											
4.140.4	5.2	4.9	3582	52	11	1892	41	39	6	100	1056	1180	430	656		15	15	4/19	2x1/4"
4.140.4	6.2	6.6	2837	52	11	1792	41	58	10	120	1056	1280	430	656		22	12	4/19	2x1/4"
4.145.8	8.8	7.8	4510	56	10	2901	47	82	8	116	1056	1230	530	856		22	12	4/19	2x1/4"
4.150.4	10.2	10.2	4230	56	10.5	2623	47	78	11	140	1056	1420	530	856		22	12	4/19	2x1/4"
4.150.4	11.6	10.2	6946	63	10.4	4099	59	76	12	147	1136	1280	530	956		22	12	4/19	2x1/4"
4.156.4	13.2	14.2	6527	63	10.5	4075	59	117	18	182	1156	1420	530	956		28	16	4/19	2x1/4"
4.156.4	14.2	16.4	9924	63	10.7	6394	53	108	16	182	1456	1540	630	1056		28	16	4/19	2x1/4"
4.156.4	17.1	20.3	9381	63	12.2	5942	53	162	24	236	1456	1540	630	1056		35	16	4/19	2x1/4"
4.163.4	22.1	19.9	12071	63	12.4	8620	58	130	20	203	1496	1470	720	1056		35	16	4/19	2x1/4"
4.163.4	22.6	24.4	11967	63	12.2	8282	58	195	30	254	1496	1610	720	1056		35	16	4/19	2x1/4"



4.140.4	5.2	4.9	3582	52	11	1892	41	39	6	100	1056	1180	430	656		15	15	4/19	2x1/4"
4.140.4	6.2	6.6	2837	52	11	1792	41	58	10	120	1056	1280	430	656		22	12	4/19	2x1/4"
4.145.8	8.8	7.8	4510	56	10	2901	47	82	8	116	1056	1230	530	856		22	12	4/19	2x1/4"
4.150.4	10.2	10.2	4230	56	10.5	2623	47	78	11	140	1056	1420	530	856		22	12	4/19	2x1/4"
4.150.4	11.6	10.2	6946	63	10.4	4099	59	76	12	147	1136	1280	530	956		22	12	4/19	2x1/4"
4.156.4	13.2	14.2	6527	63	10.5	4075	59	117	18	182	1156	1420	530	956		28	16	4/19	2x1/4"
4.156.4	14.2	16.4	9924	63	10.7	6394	53	108	16	182	1456	1540	630	1056		28	16	4/19	2x1/4"
4.156.4	17.1	20.3	9381	63	12.2	5942	53	162	24	236	1456	1540	630	1056		35	16	4/19	2x1/4"
4.163.4	22.1	19.9	12071	63	12.4	8620	58	130	20	203	1496	1470	720	1056		35	16	4/19	2x1/4"
4.163.4	22.6	24.4	11967	63	12.2	8282	58	195	30	254	1496	1610	720	1056		35	16	4/19	2x1/4"