

Grasso RC 311

Specifications

| | |
|------------------------------|------------------------------|
| Merk | Grasso |
| Type | RC 311 |
| Koudemiddel | Freon |
| kW at 0°C/+40°C | 683,7 |
| kW at -5°C/+40°C | 563,3 |
| kW at -10°C/+40°C | 457,0 |
| kW at -20°C/+40°C | 284,9 |
| kW at -30°C/+40°C | 159,1 |
| Op stalen frame | ✓ |
| Druk veiligheids schakelaars | ✓ |
| Manometers | ✓ |
| Vloeistof tank | ✓ |
| Vloeistof tank ltr. | 2275 |
| Olie afscheider | ✓ |
| Olie level systeem AC&R | ✓ |
| Filter droger | ✓ |
| Kijk glas | ✓ |
| m ³ / h | 924 |
| Package / Rack | ✓ |
| Afmetingen | 4820x2400x3000 mm (LxWxH) |
| Stock | 1 |





Description

Used Grasso RC 311

Gebruikte Grasso RC 311 unit. Met de volgende elementen: 2 Grasso RC 311 zuigercompressoren met 2 Leroy-Somer 75 kW - 1465 RPM elektromotoren, 1 Bitzer 6G-40.2Y Semi-hermetische zuigercompressor met een Leroy-Somer 30 kW -1445 RPM elektromotor. Witt Vloeistofreservoir met een inhoud van 2275 Liter met 2 pompjes. 3 Olieafscheiders, Druk- en veiligheidsschakelaars/-meters en filterdrogers voor vloeistofleidingen.





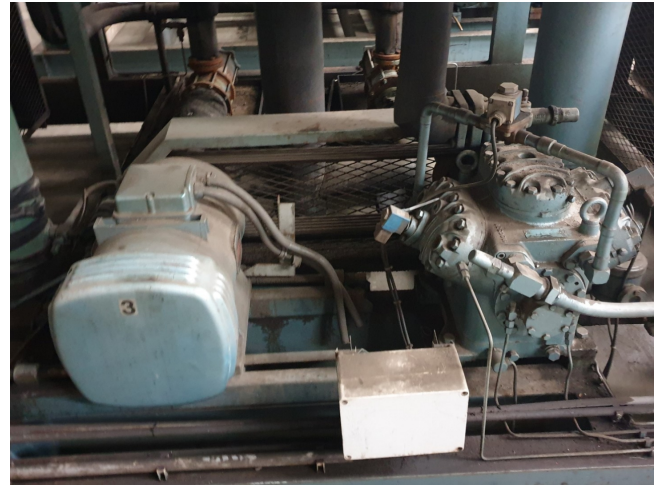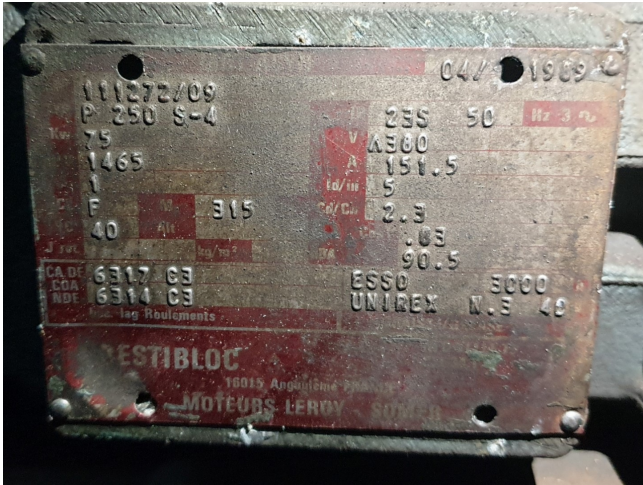





Your partner for used commercial and industrial refrigeration equipment
