

Bitzer 4J-22.2

Specifications

Marka	Bitzer
Typ	4J-22.2
Czynnik chłodzący	Freon
kW at 0°C/+40°C	51,5
kW at -5°C/+40°C	42,7
kW at -10°C/+40°C	35,1
kW at -20°C/+40°C	22,8
kW at -30°C/+40°C	13,7
kW at -40°C/+40°C	7,1
Podstawa na stalowej ramie	✓
Ciśnieniowe przełączniki bezpieczeństwa	✓
Wskaźniki ciśnienia	✓
Obiornik cieczy	✓
Obiornik cieczy ltr.	30
Separator oleju	✓
Osuszający filter lini cieczy	✓
Okno widokowe	✓
Zawór elektromagnetyczny	✓
m ³ / h	63,5
Rozmiary	1200x1000x1400 mm (LxWxH)
Stock	1





Description

Used Bitzer 4J-22.2

Used Bitzer 4J-22.2 semi-hermetic reciprocating compressor on Freon. Complete with a Bitzer F300H liquid receiver 30 liters, AC&R S-5690 oil separator, liquid line filter drier and pressure and safety switches/gauges. The compressor has a displacement of 63,5 m³/h.

*Why choose for HOSBV? We are not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment solely if it has passed our extensive test. Warranty and industrial cleaning are included in your purchase. *If requested we are happy to arrange your shipment.

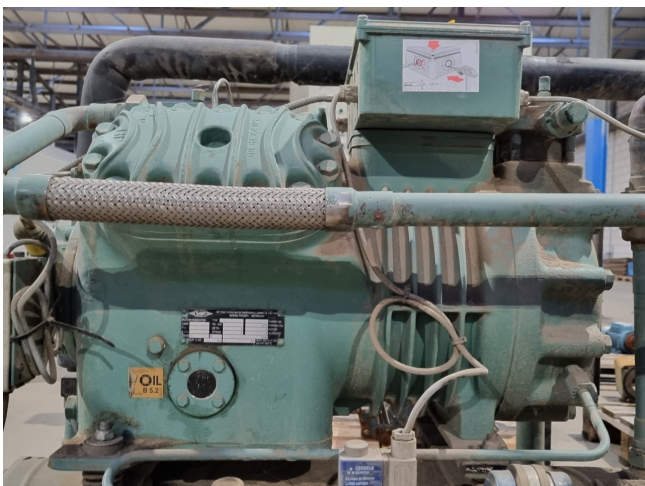

 BITZER KÜHLMASCHINENBAU GMBH & CO. KG SINDELFINGEN, GERMANY			
MOTORVERDICHTER	TYP	4J-22.12	15100150
JAH	PS / KW	22 / 16.1	63.5
V A	BETR.-	A	57 A
V A A	STROM	38 A	153 A
PRIMZ	3~ / 50	IP 54	1450 / U/min
PRÜF. Ü. DR.	32.5 bar	19.7 / 25 bar	MAX. BETR. Ü. DR. ND. HD. SEITE

