

Bitzer 4DC-5.2Y-40S

Specifications

Marka	Bitzer
Typ	4DC-5.2Y-40S
Czynnik chłodzący	Freon
kW at 0°C/+40°C	13,3
kW at -5°C/+40°C	10,7
kW at -10°C/+40°C	8,5
kW at -20°C/+40°C	5,0
kW at -30°C/+40°C	2,6
kW at -40°C/+40°C	3,0
Podstawa na stalowej ramie	✓
Ciśnieniowe przełączniki bezpieczeństwa	✓
Obiornik cieczy	✓
Obiornik cieczy ltr.	24,5
Osuszający filter lini cieczy	✓
Okno widokowe	✓
m ³ / h	50 Hz - 26,9 m ³ /h / 60 Hz - 32,4 m ³ /h
Uwagi	Y.o.b. 2007
Condensing Unit	✓
Rozmiary	2050x800x990 mm (LxWxH)
Stock	1






Description

Used Bitzer 4DC-5.2Y-40S

Used Bitzer condensing unit on Freon. Complete with 1 Bitzer 4DC-5.2Y-40S semi-hermetic reciprocating compressor, condenser with 3 ebmpapst S4E400-AP02-83 fans - 50/60 Hz - 0,16/0,24 kW - 1430/1700 RPM and an RV-280X498 liquid receiver with a volume of 24,5 liter, liquid line filter drier and pressure safety switches. The compressor has a displacement of 26,9 m³/h at 50 Hz and 32,4 m³/h at 60 Hz. *Why choose for HOSBV? We are not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty, and industrial cleaning. *Optional we can also perform a new paint job and arrange the logistics.

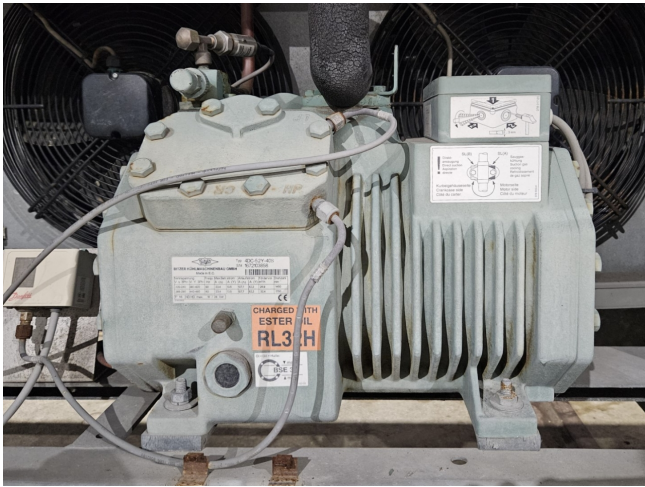



		LEGNAGO VERONA-Italy I-37048		
Type	RV-280X498			
Manufacture- Nr.	6246604			
Manufacture year	2006			
Fluids Group	2	/	Escluded	/
Category	II	/	Volume V:L	24.5
Temperature TS-°C	-10	120	-50	120
Max. permissible press. PS-bar	33		24	
Test pressure PT-bar	47.19			



