


# Frascold SA 4 16 D Y/2

## Specifications

Marka	Frascold
Typ	SA 4 16 D Y/2
Czynnik chłodzący	Freon
kW at 0°C/+40°C	13,5
kW at -5°C/+40°C	11,2
kW at -10°C/+40°C	9,1
kW at -20°C/+40°C	5,9
kW at -30°C/+40°C	3,5
Ciśnieniowe przełączniki bezpieczeństwa	✓
Obiornik cieczy	✓
Obiornik cieczy ltr.	7 l
Osuszający filter lini cieczy	✓
Okno widokowe	✓
m <sup>3</sup> / h	16,4 m <sup>3</sup> /h - 1450 RPM & 19,7 m <sup>3</sup> /h - 1740 RPM
Uwagi	Y.o.b. 2007
Condensing Unit	✓
Rozmiary	1000x740x550 mm (LxWxH)
Stock	1

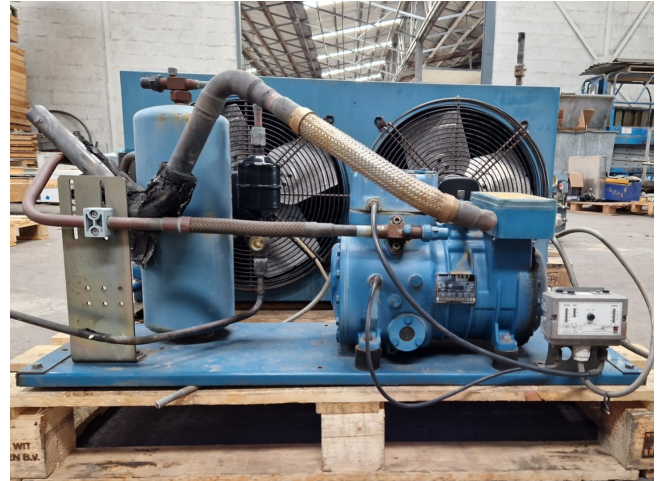

## Description

### Used Frascold SA 4 16 D Y/2

Used Frascold SA 4 16 D Y/2 condensing unit. Complete with Frascold D 4 16 Y semi-hermetic reciprocating compressor, liquid receiver with a volume of 7 liters, liquid line filter drier, pressure safety switch, sight glass and condenser with 2 Frascold R11R-4030A-4M-5148 fans - 50/60 Hz - 0,2 kW - 1330 RPM - diameter 420 mm. The compressor has a displacement of 16,4 m<sup>3</sup>/h at 1450 RPM and 19,7 m<sup>3</sup>/h at 1740 RPM. \*Why choose for HOSBV? Were not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning. Optionally we can arrange your logistics when requested.

