

## Bock F5


### Specifications

Marka	Bock
Typ	F5
Czynnik chłodzący	Freon
kW at +10°C/+40°C	83.33
kW at 0°C/+40°C	59.40
kW at -5°C/+40°C	49.15
kW at -10°C/+40°C	40.01
kW at -20°C/+40°C	24.94
kW at -30°C/+40°C	13.98
kW at -40°C/+40°C	6.89
kW at -45°C/+40°C	4.72
Kontrolka wydajności	✓
Uwagi	R404a - R22 or other freon types
Rozmiary	400x300x350 mm (LxWxH)
Stock	1



### Description

#### Used Bock F5

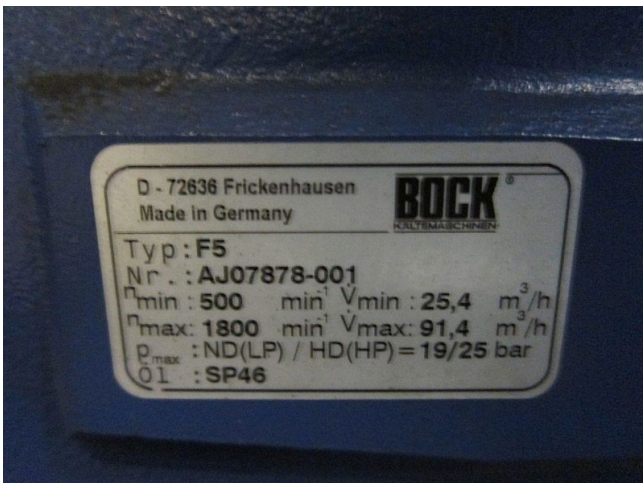

R404A/R507		Performance data											1.450 rpm			
Type	Cond. temp. °C	Cooling capacity $\dot{Q}_0$ [W]											Power P [kW]			
		Evaporating temperature °C														
		10	5	0	-5	-10	-15	-20	-25	-30	-35	-40	-45			
FX2	30	Q	13423	11418	9621	8020	6606	5366	4290	3366	2584	1933	1402	979		
	P	2.21	2.19	2.13	2.05	1.94	1.80	1.65	1.48	1.31	1.12	0.94	0.75			
	Q	11561	9785	8201	6797	5562	4485	3555	2761	2092	1537	1085	724			
FX3	30	Q	2.65	2.56	2.44	2.30	2.13	1.95	1.76	1.55	1.34	1.12	0.91	0.70		
	Q	9652	8113	6749	5548	4500	3593	2816	2159	1609	1157	791				
	P	3.02	2.89	2.71	2.51	2.30	2.07	1.82	1.59	1.34	1.10	0.86				
FX4	30	Q	24402	21165	20377	17011	14041	11442	9187	7531	5958	4231	2996	2175		
	P	4.97	4.85	4.66	4.41	4.11	3.77	3.40	3.01	2.61	2.21	1.83	1.46			
	Q	24498	20763	17437	14495	11911	9657	7710	6042	4628	3442	2458	1650			
FX5	30	Q	53909	45836	38585	32117	26393	21373	17019	13292	10151	7559	5476	3962		
	P	11.44	10.83	10.10	9.28	8.40	7.47	6.53	5.59	4.69	3.85	3.09				
	Q	59554	51844	44253	37854	32620	28322	24033	20024	17708	12938	9105	6342			
FX14/1166	30	Q	12.86	12.48	13.55	13.24	12.62	11.75	10.69	9.49	8.23	6.84	5.70	4.57		
	P	16.87	16.64	16.05	15.16	14.03	12.72	11.28	9.79	8.23	6.69	5.33	4.39			
	Q	83330	70784	59401	49154	40014	31955	24949	18962	13981	9965	6890	4728			
FX14/1366	30	Q	20.21	19.31	18.12	16.70	15.11	13.41	11.67	9.93	8.26	6.73	5.38			
	P	27.80	26.56	24.92	22.97	20.79	18.49	16.05	13.66	11.37	9.25	7.40				
	Q	96896	81521	67668	55301	44382	34871	26730	19922	14408	10150	7110				
FX14/1366	30	Q	131605	112604	95081	79698	65318	53000	42008	32933	24447	17801	12527	8587		
	P	17.86	18.55	18.64	18.22	17.37	16.17	14.71	13.06	11.32	9.55	7.85	6.29			
	Q	114050	97388	81727	67628	55054	43966	34206	26096	19237	13711	9480	6506			
FX14/1366	30	Q	23.21	22.89	22.08	20.86	19.30	17.49	15.32	13.47	11.41	9.43	7.61	6.04		
	P	20.96	21.77	21.87	21.38	20.38	18.98	17.26	15.33	13.28	11.21	9.21	7.38			
	Q	134550	114291	95912	79366	64609	51927	40284	30023	22375	16091	11125	7635			