


## Bitzer 4T.2

### Specifications

Marka	Bitzer
Typ	4T.2
Czynnik chłodzący	Freon
kW at +10°C/+40°C	42,8*
kW at 0°C/+40°C	33,1
kW at -5°C/+40°C	27,6
kW at -10°C/+40°C	22,8
kW at -20°C/+40°C	15,1
kW at -30°C/+40°C	9,4
kW at -40°C/+40°C	5,2
Silnik elektryczny Specs	7,5
Rozładunek	✓
Kontrolka wydajności	✓
Podstawa na stalowej ramie	✓
Ciśnieniowe przełączniki bezpieczeństwa	✓
Separator oleju	✓
Poziom oleju w systemie	✓
Osuszający filter lini cieczy	✓
Uwagi	# // *Capacity based on +7,5C/+40C // Electromotor: 7,5 kW at 1450 RPM
Uwagi	R404a - R22 or other freon types

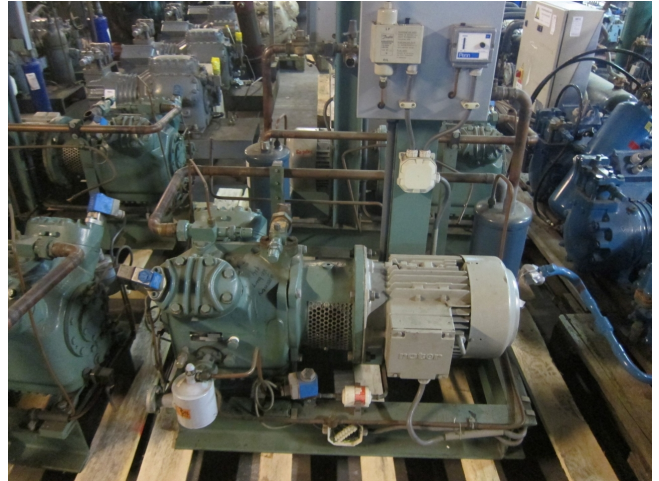

---

Rozmiar	1000x600x1150 mm (LxWxH)
Stock	3

---

## Description

### Used Bitzer 4T.2

Used Bitzer 4T.2 freon compressor, complete with unloaded start, capacity control, pressure safety switches, pressure gauges, oil separator, oil level system and liquid line filter drier.

Why choose for HOSBV? We're not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning.  
\*Optional we can also perform a new paint job and arrange the logistics.

