


## Bitzer 4H-25.2

### Specifications

|                             |                           |
|-----------------------------|---------------------------|
| Бренд                       | Bitzer                    |
| Тип                         | 4H-25.2                   |
| Хладагент                   | Freon                     |
| kW at 0°C/+40°C             | 59,4                      |
| kW at -5°C/+40°C            | 49,4                      |
| кВт at -10°C/+40°C          | 40,6                      |
| кВт at -20°C/+40°C          | 26,4                      |
| кВт at -30°C/+40°C          | 15,9                      |
| кВт at -40°C/+40°C          | 8,31                      |
| Система<br>маслоуравнивания | ✓                         |
| Смотровое стекло            | ✓                         |
| м3 / h                      | 73,76                     |
| Примечания                  | y.o.b. 2000               |
| Масса                       | 203 kg                    |
| Размеры                     | 700x540x470 mm<br>(LxWxH) |
| Stock                       | 1                         |

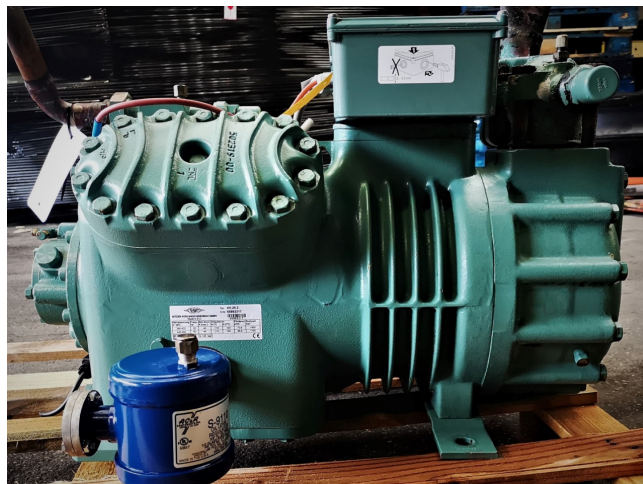



### Description


#### Used Bitzer 4H-25.2

Used Bitzer 4H-25.2 semi hermetic reciprocating compressor. Equipped with an additional AC&R filter.

\*Why choose for HOSBV? Were not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning.

\*Optional we can also arrange the logistics

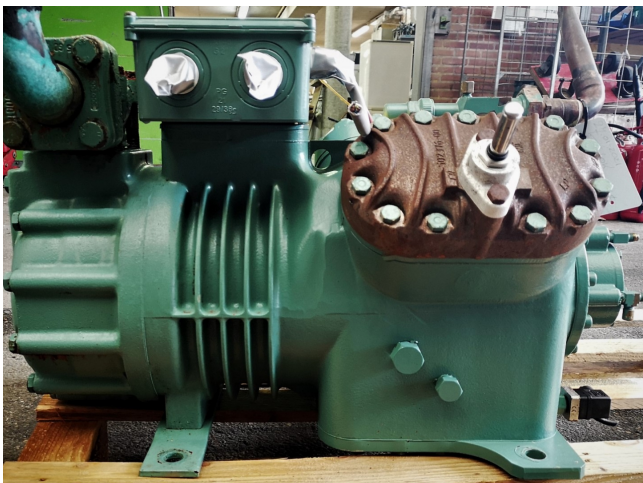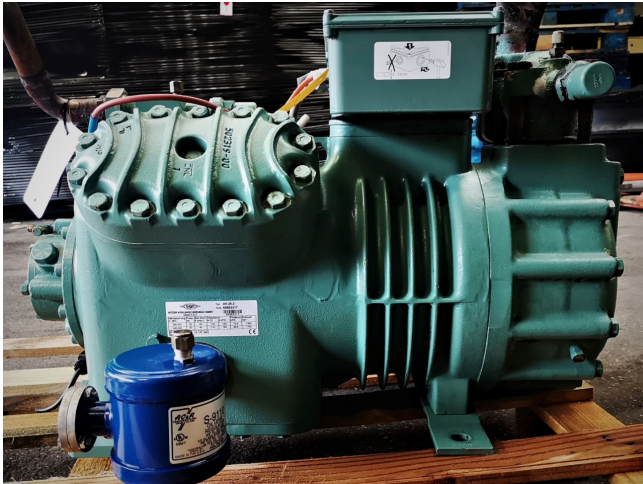

|  |        |            |             |        |            | Typ      | 4H-25.2  |
|--------------------------------------------------------------------------------------|--------|------------|-------------|--------|------------|----------|----------|
|                                                                                      |        |            |             |        |            | S.Nr.    | 65862317 |
| BITZER KÜHLMASCHINENBAU GMBH                                                         |        |            |             |        |            | 65862317 |          |
| Made in E.C.                                                                         |        |            |             |        |            |          |          |
| Nennspannung                                                                         | Frequ. | Betr.strom | Anlaufstrom |        | Fördervol. | Drehzahl |          |
| V 3Ph~                                                                               | Hz     | A (max.)   | A (Y)       | A (YY) | m³/h       | min⁻¹    |          |
| 380-420                                                                              | 50     | 45         | 116         | 193    | 73,6       | 1450     |          |
| 440-480                                                                              | 60     | 45         | 116         | 193    | 88,8       | 1750     |          |
| IP 54 ND/HD max. 19 / 28 bar                                                         |        |            |             |        |            | CE       |          |
| 378 028-06                                                                           |        |            |             |        |            |          |          |