

Güntner S-GGHN 071.2E/27-AND50/6P

Specifications

Производитель	Güntner
Тип	S-GGHN 071.2E/27-AND50/6P
кВт	49,7
Хладагент	Glycol
К-во вентиляторов	2
Расстояние между ламелями, мм	7
Оттайка	None
Поток воздуха м³/час	24.400
Размеры	3470x880x970 mm (LxWxH)
Примечания	Y.o.b. 2009
Volume	45 dm³
вес	279 kg
Stock	1





Description

Used Güntner S-GGHN 071.2E/27-AND50/6P

Used and in good condition Güntner S-GGHN 071.2E/27-AND50/6P evaporator. Complete with 2 Ziehl-Abegg fans 50 Hz - 0,68/0,31 kW - 900/690 RPM - diameter 710 mm.

*All components of this used evaporator will be tested on good working, leak free condition (electro engines), coils, bearings) Choosing HOSBV means buying with warranty. We perform a industrial cleaning and rust spots will be covered. Also, we can arrange your shipment.

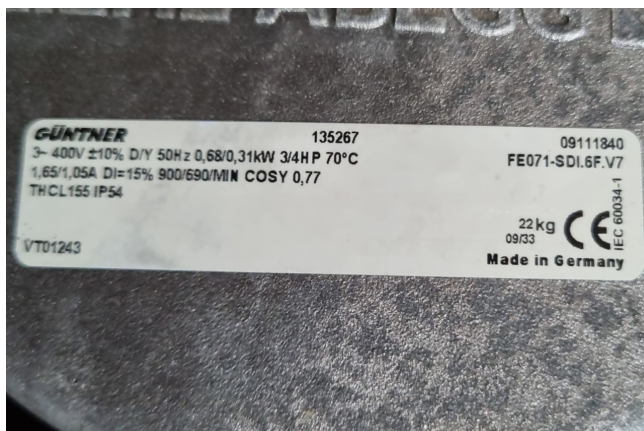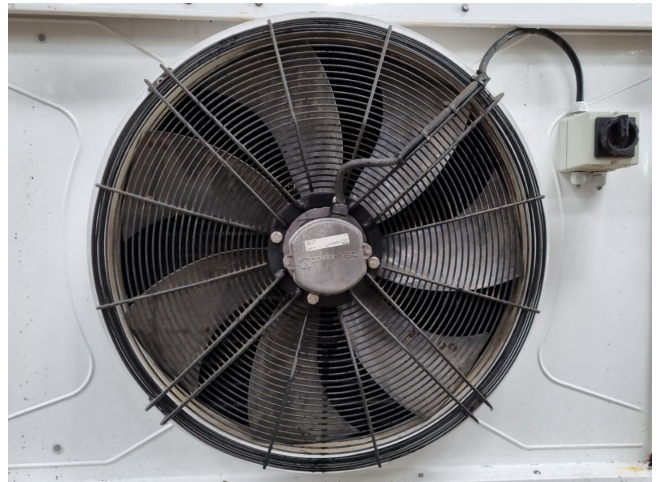



GGHN - 2 Ventilatoren - 2 Fans																				
Typ	Type	Leistung Capacity	kW	m³/h	°C	Volumenstrom Volume flow rate	m³/h	Fläche Surface	m²	Luftvolumenstrom Air volume flow	m³/h	m	m	Schalldruck Sound pressure	mm Ø	mm Ø	W	W	kW	El. Abtauheizung El. defrost
$t_i = -3\text{ °C}$; $d_p = 0.8\text{ bar}$ glykol 25%; $t_i = 10\text{ °C}$ no glycol 25%; $t_i = 10\text{ °C}$ at 85% relative humidity																				
						Colubratil Rim outlet		Fläche Surface		Luftvolumenstrom Air volume flow		Wirkfläche ohne Stauener Air flow without Stauener		Wirkfläche mit Stauener Air flow with Stauener		Kälteleiter / Sole Coolant / Brine	Anschlüsse Connections			
040.2D/24-ANW50	17.4	4.7	0.3	65.4	6120	12	27	55	35.0	35.0	3750	1200	4.95	1 x A	0.43	1 x E				
040.2F/24-ANW50	18.2	2.5	3.7	98.0	5620	11	26	55	35.0	35.0	6250	1700	7.95	1 x B	0.44	1 x E				
045.2D/24-ANW50	23.8	3.8	2.7	102.6	10220	17	36	59	35.0	35.0	4500	2300	6.80	1 x B	0.99	1 x E				
045.2E/24-ANW50	30.7	6.3	1.4	128.3	9720	16	35	59	42.0	42.0	6000	2300	8.30	1 x B	1.01	1 x E				
050.2D/24-ANW50	29.6	5.0	2.4	134.5	13300	21	41	59	42.0	42.0	7000	2400	9.40	1 x B	1.03	1 x I				
050.2E/24-ANW50	38.8	6.9	2.1	168.2	12940	21	39	59	54.0	54.0	8750	2400	11.15	1 x B	1.05	1 x I				
050.2F/24-ANW50	43.5	7.9	2.0	201.8	12600	20	37	59	54.0	54.0	10500	3600	14.10	1 x B	1.07	1 x I				
071.2D/24-ANW50	54.5	8.6	2.7	235.3	23800	35	64	57	54.0	54.0	12500	4500	17.00	2 x C	1.59	2 x G				
071.2E/24-ANW50	64.7	10.6	2.6	294.1	22460	35	63	57	54.0	54.0	15000	4500	19.50	2 x C	1.61	2 x G				
071.2F/24-ANW50	73.9	12.5	2.4	352.9	21580	34	61	57	64.0	64.0	17500	4500	22.00	2 x C	1.64	2 x G				
080.2D/24-ANW50	90.1	16.5	2.0	369.0	35940	43	75	66	64.0	64.0	18000	6000	24.00	2 x C	2.69	2 x G				
080.2E/24-ANW50	108.5	20.6	1.8	461.3	34560	42	73	66	76.1	76.1	24000	6000	30.00	3 x C	2.71	2 x G				
080.2F/24-ANW50	123.1	24.7	1.5	553.6	33440	41	71	66	88.9	88.9	27000	6000	33.00	3 x C	2.72	2 x G				
040.2F/27-ANW50	15.7	2.5	2.8	57.7	6200	13	27	55	35.0	35.0	6250	1700	7.95	1 x B	0.43	1 x E				
040.2H/27-ANW50	21.5	4.6	1.2	76.9	5860	12	26	55	42.0	42.0	7500	1700	9.20	1 x B	0.43	1 x E				
045.2E/27-ANW50	23.9	4.8	1.6	75.5	10640	17	39	59	42.0	42.0	6000	2300	8.30	1 x B	0.98	1 x E				
045.2F/27-ANW50	28.0	5.7	1.5	90.6	10380	16	38	59	42.0	42.0	7500	3450	10.95	1 x B	0.99	1 x E				
045.2H/27-ANW50	34.9	7.6	1.2	120.8	9680	16	36	59	54.0	54.0	10500	3450	13.95	1 x B	1.01	1 x E				
050.2F/27-ANW50	35.1	6.3	2.1	118.7	13400	22	41	59	54.0	54.0	10500	3600	14.10	1 x B	1.01	1 x I				
050.2H/27-ANW50	41.6	6.6	2.7	158.3	12840	21	39	59	54.0	54.0	15750	3600	19.35	2 x B	1.05	1 x I				
071.2E/27-ANW50	49.7	7.7	2.9	173.0	24400	35	65	57	54.0	54.0	15000	4500	19.50	2 x C	1.56	2 x G				
071.2F/27-ANW50	53.1	6.9	3.9	207.6	23780	35	64	57	54.0	54.0	17500	4500	22.00	2 x C	1.59	2 x G				
071.2H/27-ANW50	60.3	17.3	1.2	276.8	22380	35	61	57	76.1	76.1	22500	4500	27.00	2 x C	1.61	2 x G				
080.2E/27-ANW50	79.8	13.3	2.5	271.3	37040	44	76	66	64.0	64.0	24000	6000	30.00	3 x C	2.66	2 x G				
080.2F/27-ANW50	94.0	15.9	2.4	325.6	36340	43	75	66	76.1	76.1	27000	6000	33.00	3 x C	2.68	2 x G				
080.2H/27-ANW50	118.6	21.2	2.1	434.2	34420	42	73	66	88.9	88.9	36000	6000	42.00	4 x C	2.71	2 x G				
040.2F/210-ANW50	13.5	2.5	2.0	41.6	6420	14	28	55	35.0	35.0	6250	1700	7.95	1 x B	0.42	1 x E				
040.2H/210-ANW50	17.3	3.3	1.8	55.4	6120	13	27	55	35.0	35.0	7500	1700	9.20	1 x B	0.43	1 x E				

GGHN - 2 Ventilatoren - 2 Fans													
Typ Type	Refrigeranten Refrigerant	Nettogewicht Net weight	Abmessungen Dimensions									Ablauf G-Gewinde flachdichtend Drain G-thread flat sealing	DIN-ISO 228-1
			L	B	H	E	F	C	M	S	A		
040.2D/24-ANW50	l	kg	mm	mm	mm	mm	mm	mm	mm	mm	mm		K
040.2F/24-ANW50	10.6	75	1770	540	550	1360	425	210	870	580	400	G1/4"	
040.2H/24-ANW50	15.9	101	1770	815	560	1360	700	210	870	855	400	G1/4"	
045.2D/24-ANW50	16.2	97	2250	665	650	1780	545	240	970	700	500	G1/4"	
045.2E/24-ANW50	20.2	121	2250	665	650	1780	545	240	970	700	500	G1/4"	
050.2D/24-ANW50	21.0	131	2470	645	750	2000	545	240	1070	700	550	G1/4"	
050.2E/24-ANW50	24.7	150	2470	645	750	2000	545	240	1070	700	550	G1/4"	
050.2F/24-ANW50	31.4	184	2470	825	760	2000	700	240	1070	855	550	G1/4"	
071.2D/24-ANW50	35.7	313	3460	900	955	2720	715	380	1350	885	700	G2"	
071.2E/24-ANW50	44.7	342	3460	900	955	2720	715	380	1350	885	700	G2"	
071.2F/24-ANW50	53.6	392	3460	1050	965	2720	865	380	1350	1040	700	G2"	
080.2D/24-ANW50	55.5	424	3960	910	1250	3200	715	380	1650	890	700	G2"	
080.2E/24-ANW50	69.3	470	3950	910	1250	3200	715	380	1650	890	700	G2"	
080.2F/24-ANW50	83.2	580	3950	1060	1260	3200	865	380	1650	1040	700	G2"	
040.2F/27-ANW50	15.9	92	1770	815	560	1360	700	210	870	855	400	G1/4"	
040.2H/27-ANW50	21.2	100	1770	815	560	1360	700	210	870	855	400	G1/4"	
045.2E/27-ANW50	20.2	108	2250	665	650	1780	545	240	970	700	500	G1/4"	
045.2F/27-ANW50	24.3	125	2250	815	660	1780	700	240	970	850	500	G1/4"	
045.2H/27-ANW50	32.3	138	2250	815	660	1780	700	240	970	850	500	G1/4"	
050.2F/27-ANW50	29.9	154	2470	825	760	2000	700	240	1070	855	550	G1/4"	
050.2H/27-ANW50	41.9	184	2470	825	760	2000	700	240	1070	855	550	G1/4"	
071.2E/27-ANW50	44.7	279	3460	900	955	2720	715	380	1350	885	700	G2"	
071.2F/27-ANW50	53.6	357	3460	1050	965	2720	865	380	1350	1040	700	G2"	
071.2H/27-ANW50	71.5	387	3460	1050	965	2720	865	380	1350	1040	700	G2"	
080.2E/27-ANW50	69.3	425	3950	910	1250	3200	715	380	1650	890	700	G2"	
080.2F/27-ANW50	83.2	483	3950	1060	1260	3200	865	380	1650	1040	700	G2"	
080.2H/27-ANW50	111.0	531	3950	1060	1260	3200	865	380	1650	1040	700	G2"	