


## Bitzer 4G.2

### Specifications

|                     |                            |
|---------------------|----------------------------|
| Бренд               | Bitzer                     |
| Тип                 | 4G.2                       |
| Хладагент           | Freon                      |
| kW at 0°C/+40°C     | 70,9                       |
| kW at -5°C/+40°C    | 58,7                       |
| кВт at -10°C/+40°C  | 48,2                       |
| кВт at -20°C/+40°C  | 31,2                       |
| кВт at -30°C/+40°C  | 18,8                       |
| кВт at -40°C/+40°C  | 10,1                       |
| kW at -45°C/+40°C   | 6,8                        |
| Разгруженный старт  | ✓                          |
| Управление          | ✓                          |
| производительностью |                            |
| На стальной раме    | ✓                          |
| Прессостаты         | ✓                          |
| Манометры           | ✓                          |
| Маслоотделитель     | ✓                          |
| m <sup>3</sup> / h  | 102                        |
| Примечания          | Y.o.b. 2007                |
| Размеры             | 1140x660x910 mm<br>(LxWxH) |
| Stock               | 1                          |


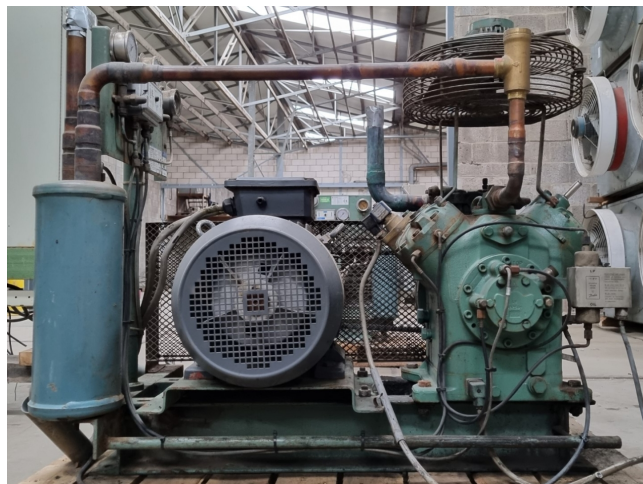



### Description

#### Used Bitzer 4G.2

Used Bitzer 4G.2 open-type reciprocating compressor on Freon with a sight glass. Complete with a Techtop T3CR 160L-4 electric motor - 50/60 Hz - 15/18 kW - 1445/1730 RPM, AC&R S-5692 oil separator and pressure and safety switches/gauges. The compressor has a displacement of 102 m<sup>3</sup>/h at 1750 RPM.

\*Why choose for HOSBV? Were not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment solely if it has passed our extensive quality test and after it has been cleaned industrially. \*If requested we are happy to arrange your shipment.

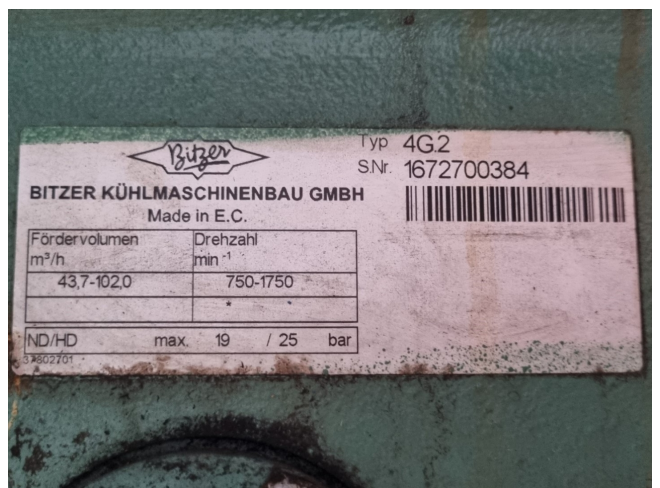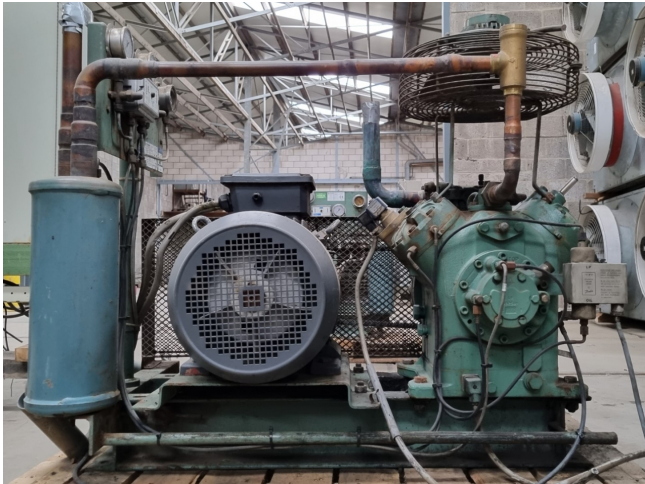

|                                                                                      |                   |                                                                                       |
|--------------------------------------------------------------------------------------|-------------------|---------------------------------------------------------------------------------------|
|  |                   | Typ 4G.2                                                                              |
| BITZER KÜHLMASCHINENBAU GMBH                                                         |                   | S.Nr. 1672700384                                                                      |
| Made in E.C.                                                                         |                   |  |
| Fördervolumen<br>m³/h                                                                | Drehzahl<br>min⁻¹ |                                                                                       |
| 43,7-102,0                                                                           | 750-1750          |                                                                                       |
| ND/HD                                                                                | max. 19 / 25 bar  |                                                                                       |

