

Mycom 200VLD

Specifications

Бренд	Mycom
Тип	200VLD
Хладагент	NH 3 (ammonia)
кВт at +10°C/+40°C	1637,2*
kW at 0°C/+40°C	1148,2*
kW at -5°C/+40°C	949,4*
кВт at -10°C/+40°C	777,5
кВт at -20°C/+40°C	504,5
кВт at -30°C/+40°C	309,9
кВт at -40°C/+40°C	176,0
kW at -45°C/+40°C	127,0
Электродвигатель	50/60 Hz - 250/287 kW -
Спесс	2965/3565 RPM
Разгруженный старт	✓
Управление	✓
производительностью	
На стальной раме	✓
Манометры	✓
Маслоотделитель	✓
Соленоидный клапан	✓
Панель управления	✓
m ³ / h	1850
Примечания	Y.o.b. compressor: 2019
Примечания	*Capacity based on a bigger electro motor
Размеры	3400x1600x2550 mm (LxWxH)



Stock

1

Description


Used Mycom 200VLD

Used Mycom 200VLD screw compressor on NH3 (R717) build in 2019. Complete with a Leroy Somer PLS315L-T electro motor: 50/60 Hz - 250/287 kW - 2965/3565 RPM, Mycom HS 7530 I 200 oil separator with a volume of 1340 liter, Mayekawa OC20245 V oil cooler, Mycom M50 PM oil pump with a Leroy Somer LS112M-T electro motor, pressure and safety gauges and a control cabinet with a Mycom MYPRO-CP3 display. The compressor has a displacement of 1850 m³/h.

*Why choose for HOSBV? We're not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning.

*Optional we can also perform a new paint job and arrange the logistics.



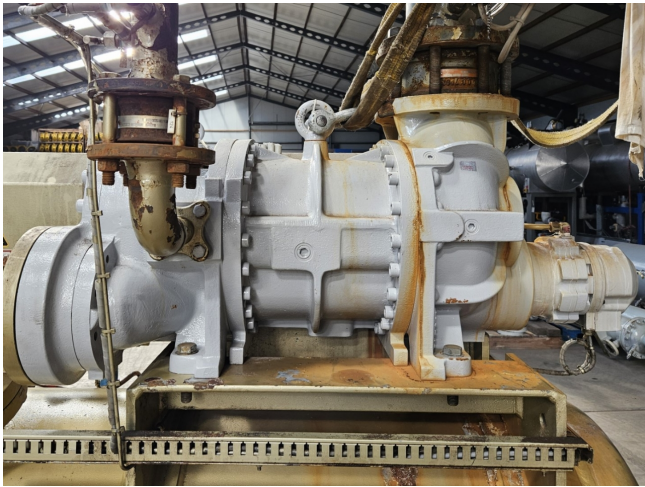

DM 1020 A

LEROY SOMER Mot 3~ PLS3 15L-T **CE**
 N° 138467KC008 kg 830

IP 23IK08I cl F		40 °C S 1			
V	Hz	min-1	kW	Cos φ	A
Δ390	50	2965	250	.88	455
Δ400		2965		.85	450
Y590		2965		.85	260
Δ415	60	2970	237	.84	460
Δ440		2965		.82	451
Δ460		2965		.81	449

DM 1949

DE 6316C3 035 19 8330 UNIPLEX NS
 NDE 6316C3 1100 1h

MOTEURS LEROY SOMER



