

Kuba SPBE 45-G51V

Specifications


Производитель	Kuba
Тип	SPBE 45-G51V
кВт	6.69
Хладагент	Glycol
К-во вентиляторов	1
Расстояние между ламелями, мм	7
Оттайка	Electric
Поток воздуха м³/час	5.650
Размеры	1330x573x662 mm (LxWxH)
Примечания	Fan: 0,4 kW / 1400 RPM / Ø = 450 mm / tube volume 8.3 dm3 / capacity based on specs SPB 45-F51 and R404A
Stock	2



Description

Used Kuba SPBE 45-G51V

Size: 1330x573x662 mm (LxWxH) ·
Weight: 95 · Fin space: 7 · m3/h: 5.650
· Fans: 1 · Hertz fans: 50 · Rpm: 1400 ·
Refrigerant: Glycol · Brand:
Kuba/Kelvion · Model: SPBE 45-G51 **All
components of this used evaporator
will be tested on good working, leak
free condition (electro engines), coils,
bearings) Choosing HOSBV means
buying with warranty. We perform a
industrial cleaning and rust spots will
be covered. Also, we can arrange your
shipment.

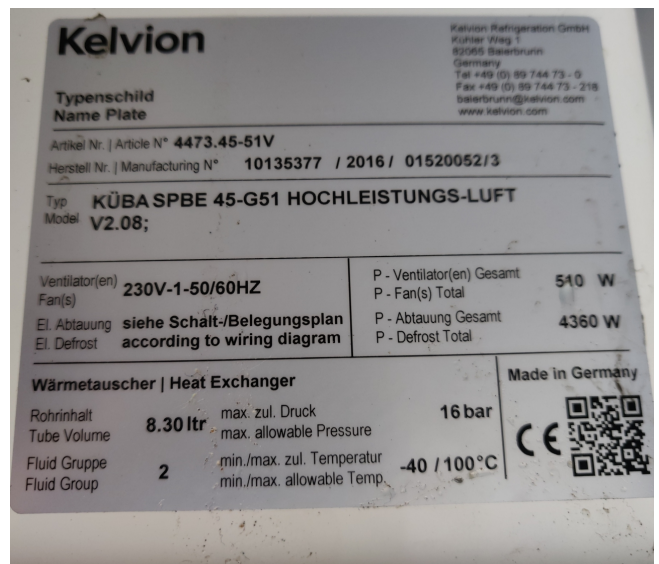



TECHNICAL DATA SPB (E)

Küba market SP | Fin spacing 7 mm

Type	Rating Q _a at 50 Hz, DT1, R404A		Cooling surface	Air flow	Air throw	Tube volume	Connections		Sound	Fans (Operational values at 50 Hz)				
	SC2	SC3					Inlet	Outlet		Blade	Current	Per fan	A	
	kW	kW	m ²	m ³ /h	m	dm ³	Gmm	Gmm	L	Blade	Current	rpm	W	A
SPB 23-F21	0.9	0.6	2.6	990	7	0.8	10 x10"	12 x10"	61	230	230 V-1	1580	30	0.25
SPB 23-F31	1.2	0.8	4.2	890	7	1.3	10 x10"	12 x10"	67	230	230 V-1	1580	30	0.25
SPB 30-F21	1.5	1.1	4.3	1660	11	1.3	10 x10"	12 x10"	65	300	230 V-1	1360	65	0.30
SPB 30-F31	2.0	1.4	6.4	1550	11	2.2	10 x10"	12 x10"	65	300	230 V-1	1360	65	0.30
SPB 35-F21	2.4	1.6	6.6	3040	19	2.1	12 x10"	18 x10"	72	350	230 V-1	1430	145	0.68
SPB 35-F31	3.3	2.4	9.8	2940	19	3.0	12 x10"	22 x10"	72	350	230 V-1	1430	145	0.68
SPB 35-F41	4.0	2.9	12.8	2830	18	4.1	12 x10"	22 x10"	72	350	230 V-1	1430	145	0.68
SPB 45-F31	5.6	4.0	16.7	5090	26	5.2	15 x10"	28 x15"	81	450	230 V-1	1360	270	1.20
SPB 45-F41	6.8	5.1	22.1	4870	25	6.8	15 x10"	28 x15"	81	450	230 V-1	1360	270	1.20
SPB 45-F51	8.8	6.8	29.6	5850	31	8.7	15 x10"	28 x15"	81	450	230 V-1	1400	490	2.20
SPB 45-F71	10.3	7.9	38.4	5270	29	11.7	15 x10"	35 x15"	81	450	230 V-1	1400	490	2.20
SPB 23-F32	2.3	1.7	8.4	1780	12	2.5	10 x10"	18 x10"	70	230	230 V-1	1580	30	0.25
SPB 30-F22	3.0	2.1	8.6	3320	17	2.7	12 x10"	22 x10"	68	300	230 V-1	1360	65	0.30
SPB 30-F32	4.0	2.9	12.8	3180	15	4.1	12 x10"	22 x10"	68	300	230 V-1	1360	65	0.30
SPB 35-F22	4.9	3.3	13.2	6080	25	3.9	15 x10"	22 x10"	75	350	230 V-1	1430	145	0.68
SPB 35-F32	6.6	4.5	19.5	5880	24	5.9	15 x10"	28 x15"	75	350	230 V-1	1430	145	0.68
SPB 35-F42	8.0	5.8	26.8	5640	24	7.8	15 x10"	28 x15"	75	350	230 V-1	1430	145	0.68
SPB 45-F32	11.3	8.0	33.4	10020	32	9.9	15 x10"	35 x15"	84	450	230 V-1	1360	270	1.20
SPB 45-F42	13.6	10.3	44.3	9740	31	13.3	15 x10"	35 x15"	84	450	230 V-1	1360	270	1.20
SPB 45-F52	17.3	13.1	56.1	11300	37	16.1	15 x10"	35 x15"	84	450	230 V-1	1400	490	2.20

