

Helpman PX 3-7-R

Specifications


| | |
|-----------------------------------|----------|
| Производитель | Helpman |
| Тип | PX 3-7-R |
| кВт | 4.5 |
| Хладагент | Freon |
| К-во вентиляторов | 3 |
| Расстояние между ламелями, мм | 7 |
| Оттайка | None |
| Поток воздуха м ³ /час | 3000 |
| Remarks | 17.2 m2 |
| Volume | 5.1 dm3 |
| вес | 50 kg |
| Stock | 1 |



Description

Used Helpman PX 3-7-R

Used Low height air coolers build by Helpman type PX 3-7-R with 4.5kW and 3000 m³/h, 17.2m² and 5.1dm³. *All components of this used evaporator will be tested on good working, leak free condition (electro engines), coils, bearings) Choosing HOSBV means buying with warranty. We perform a industrial cleaning. Also, we can arrange your shipment.

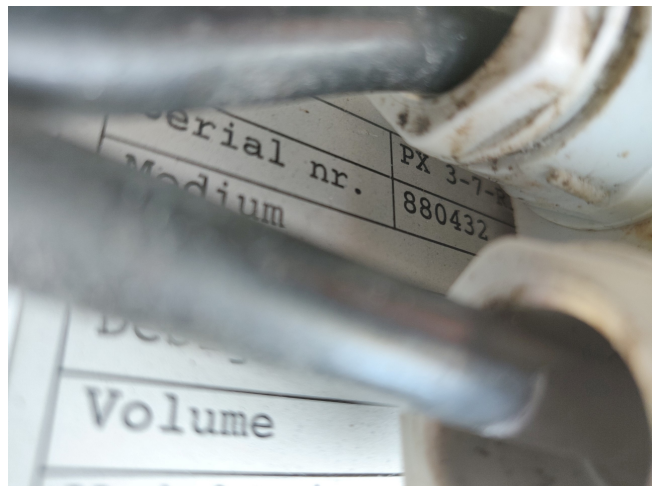

Capaciteiten & Technische gegevens

| Capaciteiten R404A / R507A (kW) | | | | Ventilatoren | | | | | | | | | |
|---------------------------------|---|---|--------------------------------------|---------------------------|----------------------------|------------------------|--------|----------------------|--|--------------------|----------------------------------|---------------------------------|---------------|
| Koeler-model | Berijpt $t_p = -8^\circ\text{C}$ $DT = 8\text{K}$ | Droog $t_p = -8^\circ\text{C}$ $DT = 8\text{K}$ | Lucht-hoer. m^3/h | Koel-opp. m^2 | Inw. vol. dm^3 | Gewicht kg | Aantal | Diam. mm | Vermogen W* nom. opgenomen 230V 400V | Worp m | Geluids-niveau dB(A) | Kabel-voer-waars. m | |
| PX 1-7 | 1.4 | 1.2 | 1000 | 5.7 | 1.7 | 17 | 1 | 254 | 30/80 | 30/65 | 10 | 48 | 2 x M20 x 1.5 |
| PX 2-7 | 2.9 | 2.5 | 2000 | 11.5 | 3.4 | 33 | 2 | 254 | 30/80 | 30/65 | 10 | 51 | 2 x M20 x 1.5 |
| PX 3-7 | 4.5 | 3.9 | 3000 | 17.2 | 5.1 | 50 | 3 | 254 | 30/80 | 30/65 | 10 | 53 | 2 x M20 x 1.5 |
| PX 4-7 | 6.0 | 5.2 | 4000 | 23.0 | 6.8 | 66 | 4 | 254 | 30/80 | 30/65 | 10 | 54 | 2 x M20 x 1.5 |
| PX 5-7 | 7.4 | 6.4 | 5000 | 28.7 | 8.5 | 73 | 5 | 254 | 30/80 | 30/65 | 10 | 55 | 2 x M20 x 1.5 |
| PX 6-7 | 8.8 | 7.7 | 6000 | 34.5 | 10.2 | 90 | 6 | 254 | 30/80 | 30/65 | 10 | 56 | 2 x M20 x 1.5 |

* Vermogen per motor. Het opgenomen vermogen van de ventilatoren is een laboratoriumwaarde gemeten bij een omgevingstemperatuur van 20 °C. Afhankelijk van de condities ter plaatse dient men rekening te houden met mogelijke afwijkingen.

Afmetingen

