

Bitzer 44CC-12.2Y-40S / 4CC-6.2Y-40S

Specifications

Brand	Bitzer
Type	44CC-12.2Y-40S / 4CC-6.2Y-40S
Refrigerant	Freon
kW at -5°C/+40°C	42,3
kW at -10°C/+40°C	34,9
kW at -20°C/+40°C	22,9
kW at -30°C/+40°C	14,0
kW at -40°C/+40°C	7,54
kW at -45°C/+40°C	5,08
Capacity Control	✓
On steel base frame	✓
Pressure safety switches	✓
Hp/Lp/Op	
Liquid receiver	✓
Suction accumulator	✓
Oil separator	✓
Liquid line filter drier	✓
Sight Glass	✓
m ³ / h	65,0
Remarks	y.o.b. 2004
Sizes	1800x940x1280mm (LxWxH)
Stock	1






Description

Used Bitzer 44CC-12.2Y-40S / 4CC-6.2Y-40S

Used Bitzer 44CC-12.2Y-40S tandem semi-hermetic reciprocating compressor with capacity control. Complete with liquid receiver, liquid line filter, oil separator, suction accumulator and pressure safety switches.

*Why choose for HOSBV? We are not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning. *Optional we can also perform a new paint job and arrange the logistics.

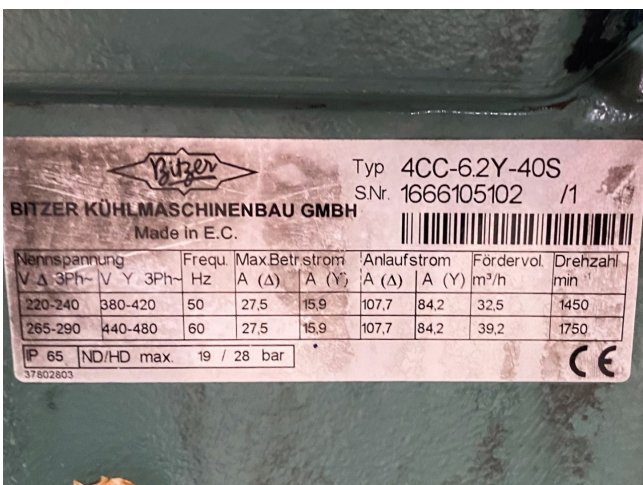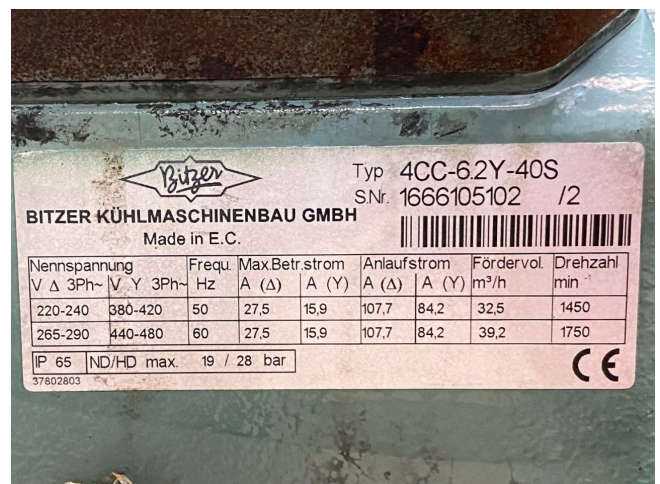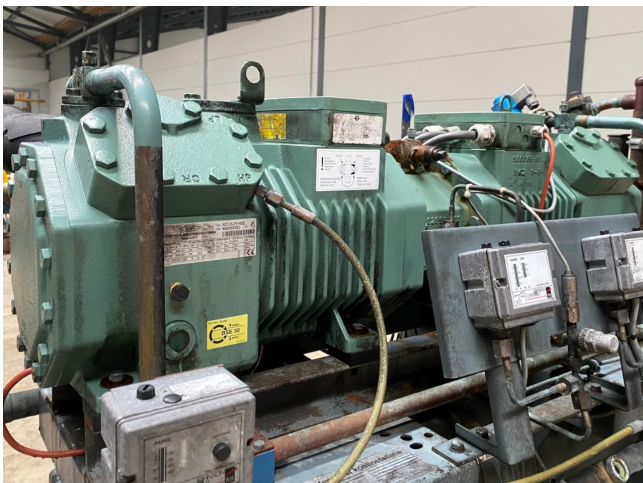

Typ 4CC-6.2Y-40S
SNr. 1666105102 /2

BITZER KÜHLMASCHINENBAU GMBH
Made in E.C.

Nennspannung		Frequ.	Max.Betr.strom		Anlaufstrom		Fördervol.	Drehzahl
V Δ 3Ph~	V Y 3Ph~	Hz	A (Δ)	A (Y)	A (Δ)	A (Y)	m³/h	min⁻¹
220-240	380-420	50	27,5	15,9	107,7	84,2	32,5	1450
265-290	440-480	60	27,5	15,9	107,7	84,2	39,2	1750

IP 65 ND/HD max. 19 / 28 bar

37802803

CE

Typ 4CC-6.2Y-40S
SNr. 1666105102 /1

BITZER KÜHLMASCHINENBAU GMBH
Made in E.C.

Nennspannung		Frequ.	Max.Betr.strom		Anlaufstrom		Fördervol.	Drehzahl
V Δ 3Ph~	V Y 3Ph~	Hz	A (Δ)	A (Y)	A (Δ)	A (Y)	m³/h	min⁻¹
220-240	380-420	50	27,5	15,9	107,7	84,2	32,5	1450
265-290	440-480	60	27,5	15,9	107,7	84,2	39,2	1750

IP 65 ND/HD max. 19 / 28 bar

37802803

CE



