


## Bitzer 4G.2

### Specifications

|                          |                             |
|--------------------------|-----------------------------|
| Brand                    | Bitzer                      |
| Type                     | 4G.2                        |
| Refrigerant              | Freon                       |
| kW at 0°C/+40°C          | 70,9                        |
| kW at -5°C/+40°C         | 58,7                        |
| kW at -10°C/+40°C        | 48,2                        |
| kW at -20°C/+40°C        | 31,2                        |
| kW at -30°C/+40°C        | 18,8                        |
| kW at -40°C/+40°C        | 10,1                        |
| kW at -45°C/+40°C        | 6,8                         |
| Electromotor Specs       | 50 Hz - 18, 5 kW - 1460 RPM |
| On steel base frame      | ✓                           |
| Pressure safety switches | ✓                           |
| Hp/Lp/Op                 |                             |
| Oil level system AC&R    | ✓                           |
| m3 / h                   | 43,7 - 102,0                |
| Sizes                    | 1270x700x700 mm (LxWxH)     |
| Stock                    | 1                           |

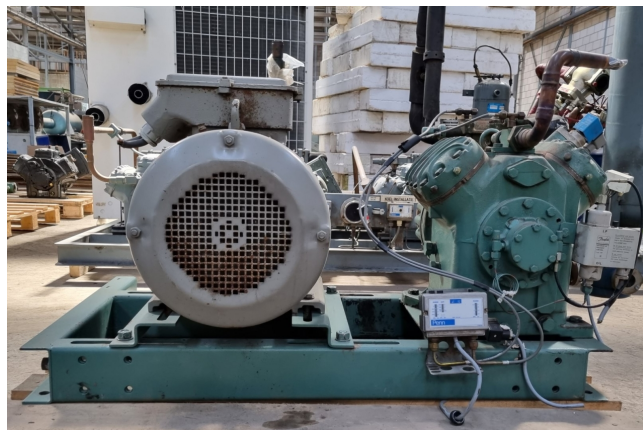

### Description

#### Used Bitzer 4G.2

Used Bitzer 4G.2 open-type reciprocating compressor on Freon. Complete with a Rotor XF180M04 811X electric motor - 50 Hz - 18,5 kW - 1460 RPM, AC&R S-9110 oil level regulator and pressure and safety switches.

\*Why choose for HOSBV? Were not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning.

\*Optional we can also perform a new paint job and arrange the logistics.

