

Goedhart VNS 66357

Specifications



Brand	Goedhart
Type	VNS 66357
kW	27.9
Refrigerant	Freon
Number of Fans	6
Fin Space in mm	7
Defrosting	None
m ³ /h	13.890
Sizes	3460x800x540mm (LxWxH)
Remarks	154m ²
Volume	33dm ³
Weight	224kg
Stock	4



Description

Used Goedhart VNS 66357

Used evaporator build by Goedhart type VNS 66357 with 27.9kW and 6 fans, 13.890m³/h, 33dm³, 154m², weight 224kg

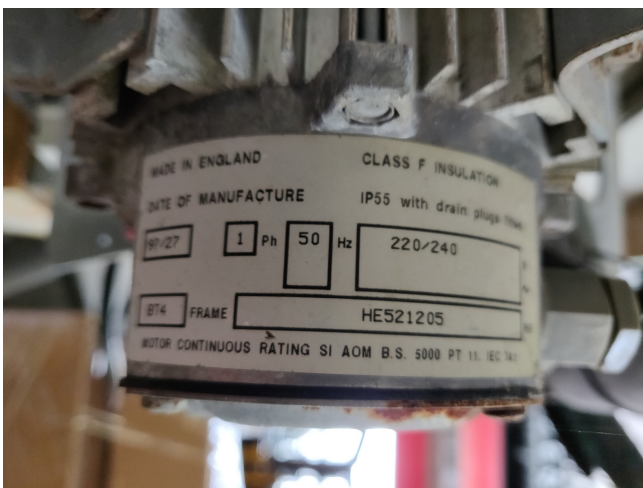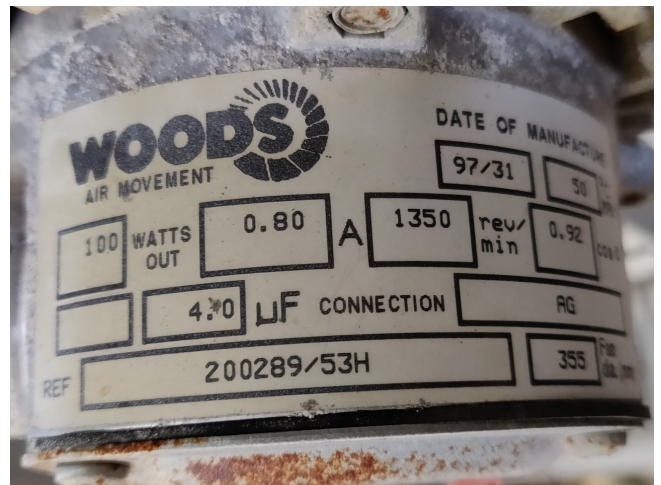

≡ 7 mm

Type	3x400V-50Hz-4 pole - Δ (1500 tpm)										Fans			Electrical defrost		
	Capacity			Capacity DT1 (R404A)	Air volume m ³ /h	Sound pressure dB(A) at 3 m (1'-2'-800mm)	Surface m ²	Number	Diameter mm	Collback	Drip tray	Total	kW	kW	kW	
	DTM-2K S/2	DTM-4K S/1	DTM-6K S/0													
VNS	kW	kW	kW	kW	m ³ /h	dB(A)	m ²									
6.3.35.7	13.6	11.3	8.9	11.5	6950	57	77	3	350	3.36	2.07	5.43				
6.4.35.7	17.7	13.5	11.2	14.9	9260	58	102	4	350	4.66	2.76	7.42				
6.5.35.7	23.7	18.8	13.3	19.8	11580	58	128	5	350	5.68	2.34	8.02				
6.6.35.7	27.9	23.0	17.7	23.5	13890	59	154	6	350	6.72	2.74	9.46				
6.7.35.7	33.1	25.9	20.8	27.5	16200	59	179	7	350	7.76	3.12	10.88				
6.8.35.7	38.2	30.7	22.9	31.9	18520	60	205	8	350	8.80	3.52	12.32				
6.3.40.7	19.9	15.9	12.5	16.8	10005	56	107	3	400	4.40	2.46	6.86				
6.4.40.7	26.5	21.6	16.7	22.4	13340	57	142	4	400	5.68	2.34	8.02				
6.5.40.7	32.1	26.0	20.9	27.0	16670	58	178	5	400	6.72	2.74	9.46				

Air coolers details

Type	Dimensions											Internal Volume dm ³	Weight (empty) kg			
	L	B	H	C	Suspension			Drain								
					E1	E2	E3	D1	D2	D3	Size					
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm				
VHS																
6.3.35.7	2250	800	540	600		1856			1128				¾"	19	149	
6.4.35.7	2860	800	540	600		2456			1428				¾"	26	190	
6.5.35.7	2450	800	540	600	1528	1528				854	1728		¾"	32	229	
6.6.35.7	4050	800	540	600	1828	1828				1014	2028		¾"	38	267	
6.7.35.7	4550	800	540	600	1828	2428				1164	2328		¾"	45	309	
6.8.35.7	5250	800	540	600	2428	2428				1314	2628		¾"	51	349	
6.3.40.7	2710	770	590	600		2306			1353				1 ¼"	27	191	
6.4.40.7	3450	770	590	600	1528	1528				864	1728		1 ¼"	36	244	
6.5.40.7	4210	770	590	600	1528	2278				1052	2103		1 ¼"	44	298	
6.6.40.7	4960	770	590	600	2278	2278				1239	2478		1 ¼"	53	352	
6.3.45.7	3310	770	690	600		2906				827	1653		1 ¼"	40	256	
6.4.45.7	4250	770	690	600	1928	1928				1064	2128		1 ¼"	54	329	
6.5.45.7	5210	770	690	600	1928	2878				1302	2603		1 ¼"	67	404	
6.6.45.7	6160	770	690	600	2878	2878				1539	3078		1 ¼"	80	477	
6.5.50.7	5450	890	690	700	2028	3028				1364	2728		1 ¼"	71	453	
6.6.50.7	6450	890	690	700	2028	2000	2028			1614	3228		1 ¼"	85	536	

Dimension details