

Bitzer 4J-22.2Y Condensing unit

Specifications

Marque	Bitzer
Le type	4J-22.2Y Condensing unit
Réfrigérant	Freon
kW at 0°C/+40°C	51,5
kW at -5°C/+40°C	42,7
kW at -10°C/+40°C	35,1
kW at -20°C/+40°C	22,8
kW at -30°C/+40°C	13,7
kW at -40°C/+40°C	7,11
Sur le châssis en acier	✓
Interrupteurs de sécurité de pression	✓
Manomètres	✓
Réservoir de liquide	✓
Réservoir de liquide ltr.	55
Liquid déshydrateur ligne	✓
Voyant	✓
Panneau de configuration	✓
m3 / h	63,5
Weight	629
Condensing Unit	✓
Tailles	1930x1000x2160 mm (LxWxH)
Stock	1



Description

Used Bitzer 4J-22.2Y Condensing unit

Used Bitzer condensing unit containing the following elements: Bitzer 4J-22.2Y semi-hermetic reciprocating compressor. Condensator with 6 Ziehl-Abegg fans 50 Hz - 0,145 kW - 1500 RPM - diameter 400 mm. Liquid receiver 55 liters with liquid line filter and control panel.


*Why choose for HOSBV? Were not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning.

*Optional we can also perform a new paint job and arrange the logistics.



FRIGOTRONIC		Refrigeration systems		CE	1117
Type	HSB-CU-B4J V=28 Z=42 R507				
Id. no.	0026904	Voltage	230/400-50-3		
Int. Project no.	90 x 38447	Power consum.	16	kW	
Ext. Project no.	10 x 78006	PS H/L	27,5 / 16		barg
Prod. Date	wk 11-2008	TS H/L	+100/-10 °C		
Refrigerant	R507	Nett Weight	629 kg		

gti
GTI Koudetechniek bv PO box 7026 NL - 5980 AA Panningen

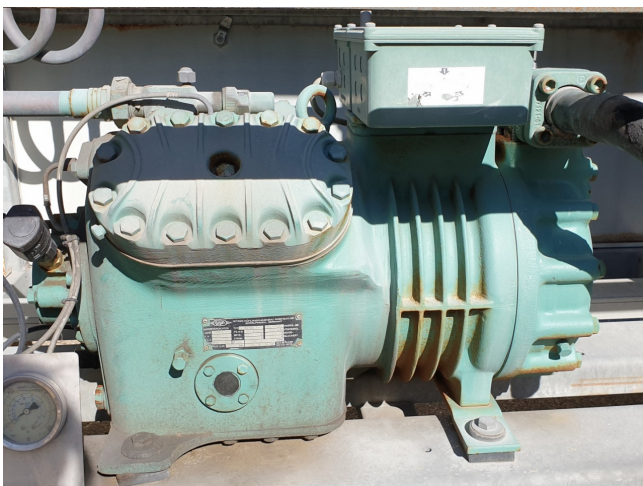

BITZER		BITZER KÜHLMASCHINENBAU GMBH & CO. KG SINDELFINGEN, GERMANY			
MOTORVERDICHTER	TYP	4J-22.2	15071185	FABRIK-NR.	
JAHR	PS/KW	22 / 16,1	63,5	m ³ /h FÖRDERVOL.	
V A	BETR-		97	A ROTOR-	
V A	STROM	39	198	A BLOCKIERT	
1/1HZ 3~/	IP	54	1450	/ U/min	
PRÜF.Ü.DR.		32,5 bar	19 / 25 bar	MAX BETR.Ü.DR. ND/HD-SEITE	

