

Kampmann kompact 3000

Specifications

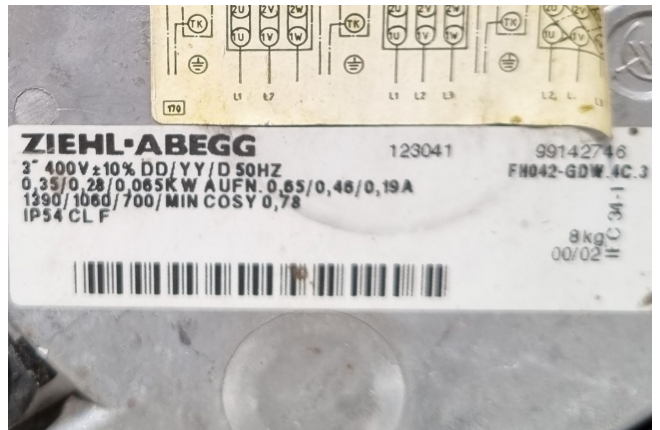
Marka	Kampmann
Rodzaj	kompact 3000
Spec.	luchtverhitter / bouwverwarmer
Stock	1





Description

Used Kampmann kompact 3000

used kampmann Kompact 3000 air heater / construction heater on water. Ideal for heating large spaces. The Kampmann has a total air volume of 3380 m³/h and has a speed of 1350 rotations per minute. In the middle is a heat exchanger with 4 mm space between them. The rotor fan is of the brand Ziehl-Abegg and has a diameter of 420 mm. Sizes: 830x590x640 mm (LxWxH).



Bezeichnung: Lufterhitzer Kompakt 3000 Description: Wärmet. Kreuzgeg. str. SI Désignation: 		
Nennspannung: Voltage: Tension nominale:	400V 3~ 50 Hz	
Drehzahl: Speed: Vitesse:	700/1050/1350	1/min
Nennstrom: Amperage: Intensité du courant:	0,22/0,45/0,67 A	
Nennleistung: Power: Puissance nominale:	80/280/350 W	
max. Ansaugtemp. am Motor: max. air inlet temp.: Temp. maxi d'aspiration au moteur:	40 °C	
Luftvolumenstrom (freiblasend): Air volume: Debit d'air (soufflage libre):	1620/2600/3380 m³/h	
Nennwärmeleistung: Heat output: Puissance calorifique nominale:	11,2/15,0/17,4 kW	
Heizmedium/Ansaugtemperatur: EWT/LWT/EAT: Liquide calorif./Temp. d'aspiration:	PW 80/40/20 °C	
max. Betriebsdruck: max. operating pressure: Pression de fonctionnement maxi:	10 bar	
max. Betriebstemperatur: max. operating temp.: Temp. de fonctionnement maxi.:	150 °C	
Serien Nr./Serial no./No de série:	00520520683	
Typ/Type no./Type:	152000353335	
 D-49811 Lingen/Ems		

