

Goedhart FC38SBp 454-7-230 E

Specifications


Marca	Goedhart
Tipo	FC38SBp 454-7-230 E
Capacidad kW	62.7
Refrigerante	Freon
Número de aficionados	4
Fan del Espacio in mm	7
Descongelación	Electric
m ³ /h	19.169
Tamaños	3450x630x700mm (LxWxH)
Comentarios	Y.O.B. 2006
Volume	38dm ³
Peso	240kg
Stock	1



Description

Used Goedhart FC38SBp 454-7-230 E

Used but in good condition Goedhart Evaporator type FC38SBp 454-7-230 E with electric defrost and 4 fans, 450mm, 19.169m³h, 240kg, 3450x630x700mm (LxWxH). "*Why choose for HOSBV? Were not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning. Optional we can arrange shipment and export documents."

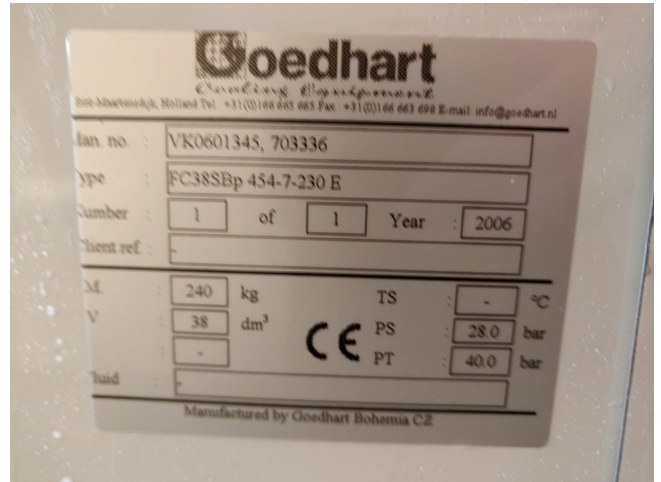

Type	Fan diameter	Order code Standard	Order code Elec. defrost	Capacities Q at 4 pole-50Hz, DT1, R404A**			Air volume	LpA ¹ @ 3m (+/-2 dB(A))	Surface	Connections		Weight	Internal volume
				SC1	SC2	SC3				I	K		
Goedhart [®] FC38Sp	mm			kW	kW	kW	m ³ /h	dB(A)	m ²	mm	mm	kg	dm ³
6.1.25.4	1250	706421	706521	1.4	1.3	1.2	632	40.8	7	12	12	26	2
6.1.30.4	1300	706422	706522	2.7	2.4	2.2	1204	42.7	11	12	12	34	2
6.1.30.4	1300	706423	706523	3.8	3.5	3.2	1633	42.7	16	12	12	39	4
6.1.35.4	1350	706428	706528	6.6	4.6	4.6	1970	52.5	25	12	12	51	5
6.1.40.4	1400	706432	706532	9.5	6.5	6.5	2632	53.4	34	12	12	63	7
6.1.45.4	1450	706436	706536	14.3	10.3	10.3	4007	54.3	45	12	12	75	9
6.2.30.4	2300	706424	706524	5.3	4.8	4.8	2399	45.5	22	12	12	50	4
6.2.30.4	2300	706425	706525	8	5.4	5.4	2056	45.5	32	12	12	61	7
6.2.35.4	2350	706429	706529	13.2	9.2	9.2	3790	55.3	50	12	12	82	10
6.2.40.4	2400	706433	706533	19.1	12.9	12.9	5249	56.2	68	16	28	103	13
6.2.45.4	2450	706437	706537	29.8	20.8	20.8	9695	57	90	16	28	123	18
6.2.50.4	2500	706422	706522	36.9	24.6	24.6	10969	57.8	112	16	35	204	22
6.3.30.4	3300	706426	706526	11.9	8.1	8.1	3680	47.1	18	12	12	81	10
6.3.35.4	3350	706430	706530	20.4	13.7	13.7	5091	56.8	25	16	28	112	14
6.3.40.4	3400	706434	706534	27.9	18.5	18.5	7868	57.7	32	16	35	142	20
6.3.45.4	3450	706438	706538	46.6	31.1	31.1	10382	58.4	44	16	35	174	26
6.3.50.4	3500	706443	706543	55.4	37	37	16440	59.3	168	22	42	291	33
6.4.30.4	4300	706427	706527	16	11.8	11.8	4103	48.2	65	16	28	134	12
6.4.35.4	4350	706431	706531	22.7	16.6	16.6	7450	57.9	99	16	35	143	19
6.4.40.4	4400	706435	706535	38.7	26	26	10485	58.7	136	16	35	183	26
6.4.45.4	4450	706440	706540	62.7	41.8	41.8	16968	59.4	176	16	42	228	38
6.4.50.4	4500	706444	706544	74.7	49.6	49.6	21911	60.2	224	22	42	376	48
6.4.54.4	5450	706440	706540	79.3	53.8	53.8	22956	60.1	222	16	42	281	42
6.4.54.4	6450	706441	706541	94.7	63.1	63.1	28744	60.7	268	22	42	322	50