

Güntner S-GGHN 071.2E/27-ANW50/6P.E

Specifications

La marque	Güntner
Type	S-GGHN 071.2E/27-ANW50/6P.E
Capacité kW	49,7
Réfrigérant	Glycol
Nombre de ventilateurs	2
Espace Fan in mm	7
Dégivrage	None
m ³ /h	24.400
Tailles	3480x730x950 mm (LxWxH)
Remarques	Y.o.b. 2009
Volume	44,7 dm ³
Poids	279 kg
Stock	4



Description

Used Güntner S-GGHN 071.2E/27-ANW50/6P.E

Used and in good condition Güntner S-GGHN 071.2E/27-ANW50/6P.E evaporator. Complete with 2 Zielh-Abegg fans 50 Hz - 0,68/0,31 kW - 900/690 RPM - diameter 710 mm. *All components of this used evaporator will be tested on good working, leak free condition (electro engines), coils, bearings) Choosing HOSBV means buying with warranty. We perform a industrial cleaning and rust spots will be covered. Also, we can arrange your shipment.




Güntner AG & Co. KG
 Hans-Güntner-Strasse 2 - 6
 D-82256 Fürstenfeldbruck
 www.guentner.de


CE 

400/3357300.0002


Projektnummer/Project number	448987
Gerätebezeichnung/Device type	S-GGHN 071.2E/27-AND50/6P.E
Herstellnummer/Serial number	400/3357300.0002
Herstellungsjahr/Year of manuf.	2009
Max/Min Druck/Oper. pressure PS	16bar/-1bar
Max/Min Temperatur/Temperature TS	100°C/-50°C
Prüfdruck/Test pressure PT	17.6bar
Prüfdatum/Test date	11.12.2009
Prüfmedium/Test medium	Druckluft/Compressed air
Volumen/Volume V	45 L
Ventilator/Fan type	VT01243

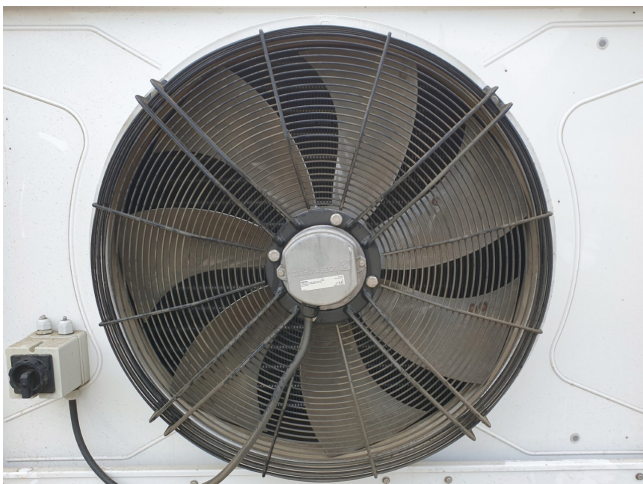

GÜNTNER 135267 09111840
 3~ 400V ±10%, D.r.y 50Hz 0,68/0,31kW 3/4HP 70°C FE071-SDI.6F.V7
 1,65/1,05A DI=15% 900/690/MIN COSY 0,77
 THCL155 IP54

22 kg
 09/33  IEC 60034-1
 Made in Germany

VT01243

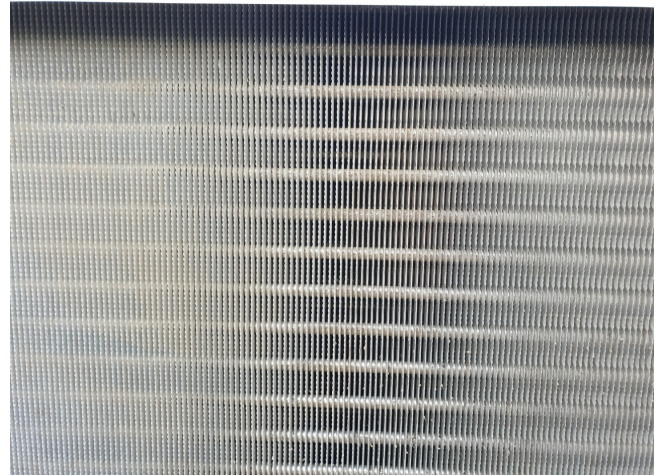

GGHN - 2 Ventilatoren - 2 Fans																	
Typ Type	Leistung Capacity	Volumenstrom Volume flow rate	Solewassert Brine outlet	Fläche Surface	Luftstromstrom Air volume flow	Wirkweite ohne Streamer Air throw without Streamer	Wirkweite mit Streamer Air throw with Streamer	Schalldruck Sound pressure	Anschlüsse Connections			El. Abtauheizung El. defrost		Anschlüsse Connections	El. Abtauheizung El. defrost		
									Kälteflüssigkeit Coolant / Brine	Kälteflüssigkeit Coolant / Brine	Kälteflüssigkeit Coolant / Brine	W	W			400 V	400 V
	kW	m³/h	°C	m²	m³/h	m	m	dB(A)/3m	mm Ø	mm Ø	mm Ø	W	W	W	W	kW	kW
040.2D/24-ANW50	17,4	4,7	0,3	65,4	6120	12	27	55	35,0	35,0	3750	1200	4,95	1 x A	0,42	1 x E	
040.2F/24-ANW50	18,2	2,5	3,7	98,0	5620	11	26	55	35,0	35,0	6250	1700	7,95	1 x B	0,44	1 x E	
045.2D/24-ANW50	23,8	3,8	2,7	102,6	10220	17	36	59	35,0	35,0	4500	2300	6,80	1 x B	0,99	1 x E	
045.2E/24-ANW50	30,7	6,3	1,4	128,3	9720	16	35	59	42,0	42,0	6000	2300	8,30	1 x B	1,01	1 x E	
050.2D/24-ANW50	29,6	5,0	2,4	134,5	13300	21	41	59	42,0	42,0	7000	2400	9,40	1 x B	1,03	1 x E	
050.2E/24-ANW50	38,8	6,9	2,1	168,2	12940	21	39	59	54,0	54,0	8750	2400	11,15	1 x B	1,05	1 x E	
050.2F/24-ANW50	43,5	7,9	2,0	201,8	12600	20	37	59	54,0	54,0	10500	3600	14,10	1 x B	1,07	1 x E	
071.2D/24-ANW50	54,5	8,6	2,7	235,3	23520	35	64	57	54,0	54,0	12500	4500	17,00	2 x C	1,59	2 x G	
071.2E/24-ANW50	64,7	10,6	2,6	294,1	22460	35	63	57	54,0	54,0	15000	4500	19,50	2 x C	1,61	2 x G	
071.2F/24-ANW50	73,9	12,5	2,4	352,9	21580	34	61	57	64,0	64,0	17500	4500	22,00	2 x C	1,64	2 x G	
080.2D/24-ANW50	90,1	16,5	2,0	369,0	35940	43	75	66	64,0	64,0	18000	6000	24,00	2 x C	2,69	2 x G	
080.2E/24-ANW50	108,5	20,6	1,8	461,3	34560	42	73	66	76,1	76,1	24000	6000	30,00	3 x C	2,71	2 x G	
080.2F/24-ANW50	123,1	24,7	1,5	553,6	33440	41	71	66	88,9	88,9	27000	6000	33,00	3 x C	2,72	2 x G	
040.2F/27-ANW50	15,7	2,5	2,8	57,7	6200	13	27	55	35,0	35,0	6250	1700	7,95	1 x B	0,43	1 x E	
040.2H/27-ANW50	21,5	4,6	1,2	76,9	5860	12	26	55	42,0	42,0	7500	1700	9,20	1 x B	0,43	1 x E	
045.2E/27-ANW50	23,9	4,8	1,6	75,5	10640	17	39	59	42,0	42,0	6000	2300	8,30	1 x B	0,98	1 x E	
045.2F/27-ANW50	28,0	5,7	1,5	90,6	10380	16	38	59	42,0	42,0	7500	3450	10,95	1 x B	0,99	1 x E	
045.2H/27-ANW50	34,9	7,6	1,2	120,8	9680	16	36	59	54,0	54,0	10500	3450	13,95	1 x B	1,01	1 x E	
050.2F/27-ANW50	35,1	6,3	2,1	118,7	13400	22	41	59	54,0	54,0	10500	3600	14,10	1 x B	1,01	1 x E	
050.2H/27-ANW50	41,6	6,6	2,7	158,3	12940	21	39	59	54,0	54,0	15750	3600	19,35	2 x B	1,05	1 x E	
071.2E/27-ANW50	49,7	7,7	2,9	173,0	24400	35	65	57	54,0	54,0	15000	4500	19,50	2 x C	1,56	2 x G	
071.2F/27-ANW50	53,1	6,9	3,9	207,6	23780	35	64	57	54,0	54,0	17500	4500	22,00	2 x C	1,59	2 x G	
071.2H/27-ANW50	80,3	17,3	1,2	276,8	22380	35	61	57	76,1	76,1	22500	4500	27,00	2 x C	1,61	2 x G	
080.2E/27-ANW50	79,8	13,3	2,5	271,3	37040	44	76	66	64,0	64,0	24000	6000	30,00	3 x C	2,66	2 x G	