

# Goedhart BSE 456-7-230 E

## Specifications


Marka	Goedhart
Typ	BSE 456-7-230 E
Ogólna wydajność w kW	50.54
Czynnik chłodzący	Freon
Liczba wentylatorów	6
Średnica wentylatora mm	7
Rozmrażanie	Electric
Przepływ powietrza w m <sup>3</sup> /h	27060
Rozmiary (LxWxH)	4985x500x690mm
Volume	53 dm <sup>3</sup>
Waga	284
Stock	2



## Description

### Used Goedhart BSE 456-7-230 E

Used well maintained Goedhart BSE 456-7-230 E evaporator with electric defrosting and 6 Fans, 27.060 m<sup>3</sup>/h, 4985x500x690mm (LxWxH), 53 dm<sup>3</sup>  
**\*\*Why choose for HOSBV? We're not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning. Optional we can arrange shipment and export documents.**

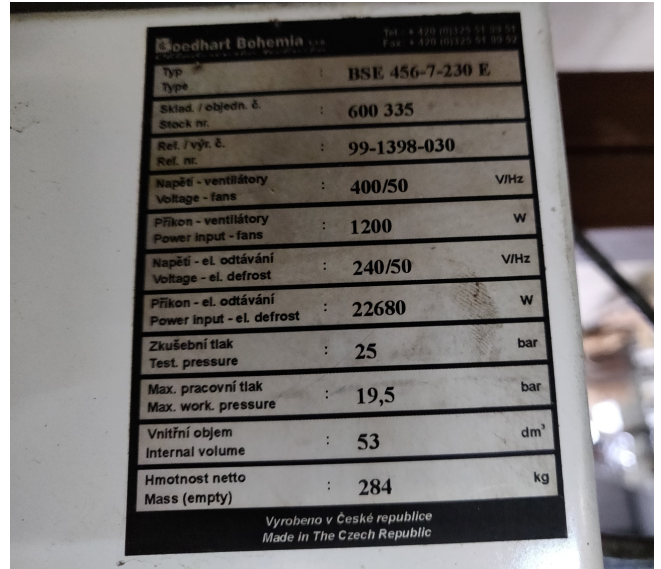

### BSE 7 MM LAMELAFSTAND

TYPE	CAPACITEIT (R22)						VENTILATOREN		OPPERVLAK	CAPACITEIT (R22)	
	Verdampingstemp. = -5°C		Gemiddelde luchttemp. = -18°C				Luchtvoersnelh.	Type		EUROVENT/CECOMAF	
	DTM-8 5/-3	DTM-7 5/+2	DTM-6 5/+1	DTM-8 -25/18	DTM-7 -25/18	DTM-6 -24/18				To-8°C	To-29°C
[W]	[W]	[W]	[W]	[W]	[W]	[m <sup>3</sup> /h]		[W]	[W]		
BSE 251-7	1120	870	815	960	730	570	870	1 x ø250	4	800	600
BSE 31A-7	1830	1430	1430	1680	1400	1080	1310	1 x ø300	6	1240	1040
BSE 31B-7	2620	2240	1820	2060	1860	1580	1230	1 x ø300	10	1820	1440
BSE 32A-7	3680	2880	2390	3380	2810	2180	2630	2 x ø300	13	2660	2100
BSE 351-7	4490	3670	2780	3860	3320	2690	2260	1 x ø350	15	2960	2430
BSE 32B-7	5250	4490	3660	4810	3990	3160	2460	2 x ø300	19	3660	2880
BSE 401-7	6050	4950	4110	5390	4550	3610	3070	1 x ø400	20	4250	3270
BSE 451-7	8340	6990	5660	7410	6260	4970	4510	1 x ø450	27	5960	4670
BSE 352-7	9000	7380	6050	7740	6650	5400	4520	2 x ø350	30	6260	4880
BSE 402-7	12140	9920	8240	10800	9120	7240	6140	2 x ø400	40	8510	6550
BSE 452-7	16420	14010	11350	14840	12560	9980	9020	2 x ø450	53	11950	9260
BSE 453-7	25090	20600	16970	22270	18870	14970	13530	3 x ø450	80	17860	13650
BSE 454-7	33590	28290	22690	29690	25120	19950	18040	4 x ø450	107	23900	18700
BSE 455-7	42660	35570	28050	34250	30140	24170	22550	5 x ø450	134	29700	23530
BSE 456-7	50540	41970	34390	44560	37710	29960	27060	6 x ø450	166	35900	27550

### BESTELKODE

