


# Sabroe SMC 116 S

## Specifications

Бренд	Sabroe
Тип	SMC 116 S
Хладагент	NH 3 (ammonia)
Refrigerant type	R717
кВт at +10°C/+40°C	1142,2
kW at 0°C/+40°C	746,1
kW at -5°C/+40°C	588,7
кВт at -10°C/+40°C	455,3
Управление	✓
производительностью	
На стальной раме	✓
Прессостаты	✓
Жидкостный ресивер	✓
Жидкостный ресивер л.115 L	
Смотровое стекло	✓
Панель управления	✓
m <sup>3</sup> / h	894 m <sup>3</sup> /h - 1480 RPM
Примечания	Y.o.b. 1988
Примечания	*Capacity based on refrigerant R717.
Размеры	2950x1100x1900 mm (LxWxH)
Stock	1

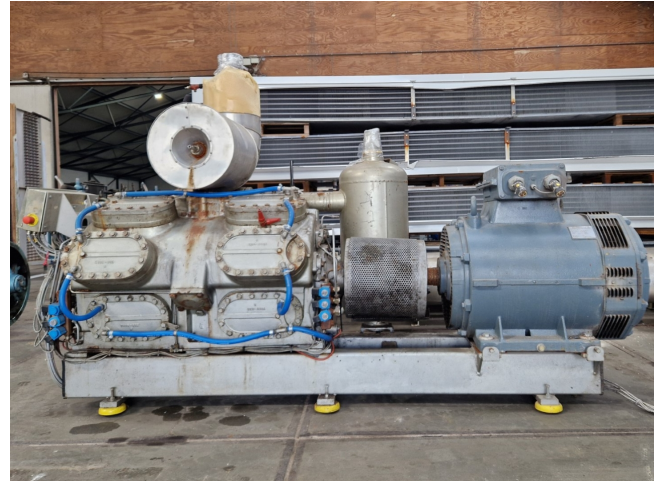

## Description

### Used Sabroe SMC 116 S

Used Sabroe SMC 116 S single-stage reciprocating compressor on a steel base frame. Complete with a Schorch KN7315M-BB01B-301 electro motor - 50/60 Hz - 200/230 kW - 1480/1780 RPM, Sabroe OVU R4110D liquid receiver with a volume of 115 liters, pressure safety switch and a Sabroe Unisab II control panel.

\*Why choose for HOSBV? Were not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning.

\*Optional we can also perform a new paint job and arrange the logistics.

