

Climaveneta BRE027M

Specifications



Производитель	Climaveneta
Тип	BRE027M
Тип продукта	Air Cooled Condenser
кВт	26,6
К-во вентиляторов	1
Скорость вращения вентиляторов	860
Хладагент	Freon
Поток воздуха м³/час	7200
Размеры	1360x1070x580mm (LxWxH)
вес	102
Stock	1



Description

Used Climaveneta BRE027M

Used but in good condition Remote condensor Climaveneta type BRE027M.0058 for R410A with 1 fan at 860 RPM , YOB 2014. For all the other specs, see the picture of the manufacturer model plate or the attached pdf file (if available) "*Why choose for HOSBV? Were not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning. Optional we can arrange shipment and export documents."

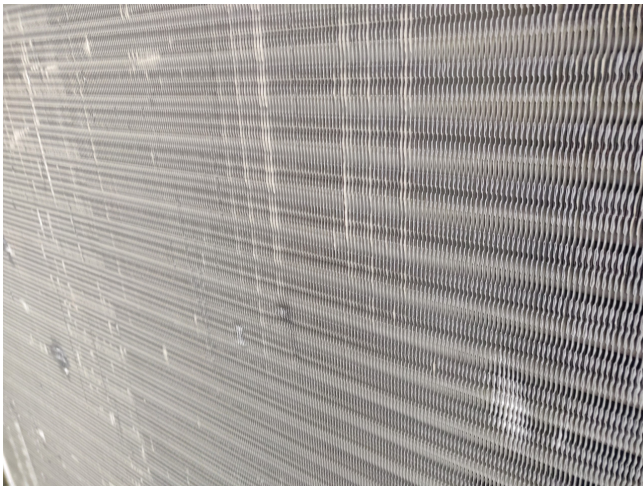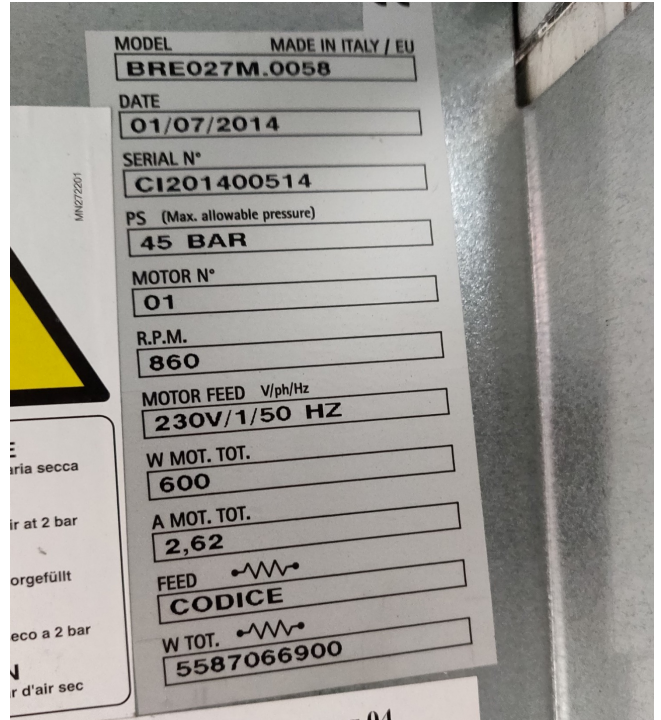

I-BRE / BASIC		014m	022m	027m	044m	051m	054b	065b
Power supply		V/ph/Hz	230/150	230/150	230/150	230/150	230/150	230/150
PERFORMANCE								
NOMINAL SPECIFICATIONS								
Rated capacity	(1) kW	13,4	21,7	26,6	43,5	50,4	65,1	65,1
No. Circuits	N°	1	1	1	1	1	2	2
Total power input	(1) kW	0,17	0,64	0,64	1,28	1,28	1,28	1,92
FANS								
Air flow	m³/h	5000	8200	7200	16400	15200	24600	24600
NOISE LEVEL								
Noise Pressure Level	(2) dB(A)	40	48	46	49	49	51	51
SIZE AND WEIGHT								
Dimension A	(3) mm	1240	1380	1360	2360	2360	3360	3360
Dimension H	(3) mm	784	1070	1070	1070	1070	1070	1070
Dimension B	(3) mm	464	580	580	580	580	580	580
Weight	(3) kg	72	85	102	137	153	191	191
I-BRE / BASIC								
Power supply		V/ph/Hz	065m	076b	100b	116b	134b	190b
			230/150	230/150	230/150	230/150	230/150	400/350
PERFORMANCE								
NOMINAL SPECIFICATIONS								
Rated capacity	(1) kW	53,3	76,2	100	116	134	187	
No. Circuits	N°	1	2	2	2	2	2	
Total power input	(1) kW	1,92	1,92	2,56	3,20	3,20	3,90	
FANS								
Air flow	m³/h	14400	22800	28800	38000	35850	53000	
NOISE LEVEL								
Noise Pressure Level	(2) dB(A)	49	51	52	53	53	53	
SIZE AND WEIGHT								
Dimension A	(3) mm	2360	3360	4360	5360	5360	4815	
Dimension H	(3) mm	1070	1070	1070	1070	1070	1326	
Dimension B	(3) mm	580	580	580	580	580	965	
Weight	(3) kg	167	213	302	339	374	550	
Notes:								
1 Exchanger air (in) 35 °C, ΔT = 13 K								
2 Sound pressure measured at 10 m in open field conditions								
3 Unit in standard configuration/execution, without optional accessories.								